

Made for makers. Simply reliable.

All power distribution systems rely on a secure infeed of electrical energy. The 3WA air circuit breaker combines all of the functions which are required of power distribution equipment in the digital companies of today: from reliably protecting people and equipment from electrical accidents and damage, to flexible application and retrofit options, a long service life and low maintenance, to innovative features for integrated e-engineering, reliable energy data recording and seamless integration into digital environments. As the central component of the electrical power distribution, the 3WA air circuit breaker provides the basis for a holistic energy system in the digital age. The 3WA air circuit breaker is also part of the Siemens Xcelerator portfolio and therefore provides support with achieving digital and sustainable transformation – faster, simpler, and scalable.

Reliable, versatile and perfectly integrated

The 3WL air circuit breakers reliably protect electrical equipment from damage or fire resulting from short circuit, ground fault or overload failures.



Note:

Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:



www.siemens.com/lowvoltage/SiemensEcoTech

Air Circuit Breakers



All the information you need	1/2
3WA1 quick selection guide	1/4
3WA1 circuit breakers and non-automatic circuit breakers for AC and DC	1/4
3WA1 circuit breakers and non-automatic circuit breakers for AC	1/8
3WA1 non-automatic circuit breakers for DC	1/14
Electronic trip unit	1/18
ETU300 electronic trip unit	1/19
ETU600 electronic trip unit	1/20
Connection	1/26
Communication	1/27
3WA11 – 3WA13	1/28
System overview	1/28
Online configurator highlights	1/30
Structure of the article numbers	1/32
Accessory options	1/46
Summary of power consumption data	1/57
Guide frames for AC	1/58
Guide frames for DC	1/60
Accessories and spare parts	1/62
3WL1 quick selection guide	1/76
3WL1 circuit breakers and non-automatic circuit breakers for AC and DC	1/76
3WL1 circuit breakers and non-automatic circuit breakers for AC	1/78
3WL1 non-automatic circuit breakers for DC	1/82
ETU electronic trip units	1/86
Connection	1/90
Operating mechanism, auxiliary release, auxiliary switch	1/91
3WL11 – 3WL13	1/92
Online configurator highlights	1/92
Structure of the article numbers	1/94
Accessory options	1/98
Guide frames for AC	1/108
Guide frames for DC	1/109
Accessories and spare parts	1/110
3WL10	1/126
Online configurator highlights	1/126
Structure of the article numbers	1/128
Accessory options	1/130
Guide frames	1/132
ETU electronic trip units and accessories	1/133
Accessories and spare parts	1/136

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about air circuit breakers, please visit our website www.siemens.com/sentron-3wa

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Quick Selection Guide
 - 3WA air circuit breakers (**109781967**)
 - 3WL air circuit breakers (**109751638**)
- Brochure
 - 3WA air circuit breakers (**109800077**)

The relevant tender specifications can be found at www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- 3WA air circuit breaker – Teaserfilm sie.ag/2Myvit
- 3WA air circuit breaker – Highlightfilm sie.ag/3dy65A

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Air circuit breakers sie.ag/2IXiZjB

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
www.siemens.com/product_catalog_SIEP?Article No.

Order supports can be found in SiePortal at www.siemens.com/lowvoltage/product-support

- Order Support
 - 3WA air circuit breakers – Made for makers. Simply reliable. (**109800074**)

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your air circuit breaker at www.siemens.com/lowvoltage/3wa-configurator
www.siemens.com/lowvoltage/3wl-configurator
www.siemens.com/lowvoltage/3wl10-configurator

The following are additionally available for your configured air circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at www.siemens.com/lowvoltage/components/contact

You will find further information on services at www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at www.siemens.com/support-request

... can be found in our online services

Commissioning + operation



SENTRON Powerconfig

The combined commissioning and service tool SENTRON Powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download SENTRON Powerconfig
www.siemens.com/powerconfig

Free download SENTRON Powerconfig mobile via
[App Store](#) and [Play Store](#)



Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the
[App Store](#) and [Play Store](#)

You will find further information at
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
www.siemens.com/lowvoltage/product-catalog
- Image database
www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAX Download Manager at
www.siemens.com/cax



Manuals

Manuals can be found in SiePortal at
www.siemens.com/lowvoltage/manuals

- Equipment Manual
 - 3WA1 air circuit breakers (**109763061**)
 - 3VA27 molded case circuit breakers & 3WL10 air circuit breakers (**109753821**)
- System Manual
 - 3WA air circuit breaker communication (**109792368**)
 - 3WL/3VL circuit breakers with communications capability – Modbus (**39850157**)
 - 3WL/3VL PROFIBUS circuit breakers with communications capability – PROFIBUS (**12560390**)
- Configuration Manual
 - 3WL1 air circuit breakers (**35681108**)
 - Low-voltage protection devices selectivity tables (**109748621**)
- Communication Manual
 - 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP (**109757987**)
 - 3WL10 air circuit breakers & 3VA27 molded case circuit breakers (**109760220**)



Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 3WA air circuit breakers (WT-LV3WA)
- 3WL10 air circuit breaker, size 0 (WT-LVA3WL0)
- 3WL air circuit breakers, sizes 1-3 (WT-LVA3WL)
- Protection systems in low-voltage power distribution (WT-LVAPS)
- Maintenance and operation of 3WA circuit breakers (LV-3WAMAIN)
- Maintenance and operation of 3WL circuit breakers (LV-3WLMMAIN)
- Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBMAIN)
- Certification: Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBCERT)
- 3WL and 3WA air circuit breakers protection technology and communication (LV-COPR)

Video tutorial on the 3WL air circuit breaker
www.lowvoltage.siemens.com/wcms/3wl-tutorial



Technical overview – Air circuit breakers



The fast way to get you to our online services

This page provides you with comprehensive information and links on air circuit breakers
www.siemens.com/lowvoltage/product-support (**109781188**)

3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

1

AC



3WA11

3WA12

Basic data

Rated operational voltage U_e	V	≤ 1000			≤ 1150		
Rated current I_n	A	630 ... 2500			2000 ... 4000		
Size		1			2		
Type of mounting		Withdrawable	Fixed-mounted		Withdrawable	Fixed-mounted	
Number of poles		3/4-pole	3/4-pole		3/4-pole	3/4-pole	

Dimensions

Width (3-pole 4-pole)	mm	320 410	320 410		460 590	460 590	
Height (for breaking capacity N, S, M, H and D C and E)	mm	466 516	437 462		466 516	437 462	
Depth	mm	471	357		471	357	

Approvals

General product approvals	VDE, EAC, CCC, CE, C-Tick					VDE, EAC, CCC, CE, C-Tick				
Marine/shipbuilding	ABS, DNV, LRS, BV, PRS, CCS					ABS, DNV, LRS, BV, PRS, CCS				

Breaking capacity

		N	S	M	H new	E	S	M	H	C	E
Rated short-circuit breaking capacity											
$I_{cu} I_{cs}$ at U_e up to 415/440 V AC	kA	55 55	66 66	85 85	100 100	– –	66 66	85 85	100 100	130 130	– –
$I_{cu} I_{cs}$ at U_e up to 500 V AC	kA	55 55	66 66	85 85	100 100	– –	66 66	85 85	100 100	130 130	– –
$I_{cu} I_{cs}$ at U_e up to 690 V AC	kA	42 42	50 50	66 66	66 66	85 85	50 50	66 66	85 85	100 100	85 85
$I_{cu} I_{cs}$ at U_e up to 1000 V AC	kA	– –	– –	– –	– –	50 50	– –	– –	– –	– –	85 85
$I_{cu} I_{cs}$ at U_e up to 1150 V AC	kA	– –	– –	– –	– –	– –	– –	– –	– –	– –	70 70

Rated short-circuit making capacity I_{cm}

I_{cm} at U_e up to 415 V AC	kA	121	145	187	220	–	145	187	220	286	–
I_{cm} at U_e up to 500 V AC	kA	121	145	187	220	–	145	187	220	286	–
I_{cm} at U_e up to 690 V AC	kA	88	105	145	145	187	105	145	187	220	187
I_{cm} at U_e up to 1000 V AC	kA	–	–	–	–	105	–	–	–	–	187
I_{cm} at U_e up to 1150 V AC	kA	–	–	–	–	–	–	–	–	–	154

AC

**3WA13**

DC

**3WA12**

1

3WA13			3WA12	
≤ 1150			≤ 1000 (≤ 1500 for 4-pole, Breaking capacity E)	
4000 ... 6300			1000 ... 4000	
3			2	
Withdrawable	Fixed-mounted		Withdrawable	Fixed-mounted
3/4-pole	3/4-pole		3/4-pole	3/4-pole
704 914	704 914		460 590	460 590
466 516	437 462		466 516	437 462
471	357		471	357
VDE, EAC, CCC, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LRS, BV, PRS, CCS			ABS, DNV, LRS, BV, PRS, CCS	
H	C	E	D	E
100 100	150 150 (3-pole); 130 130 (4-pole)	– –	– –	– –
100 100	150 150 (3-pole); 130 130 (4-pole)	– –	– –	– –
85 85	150 150 (3-pole); 130 130 (4-pole)	150 150 (3-pole); 130 130 (4-pole)	– –	– –
– –	– –	125 125	– –	– –
– –	– –	70 70	– –	– –
220	330 (3-pole); 286 (4-pole)	–	–	–
220	330 (3-pole); 286 (4-pole)	–	–	–
187	330 (3-pole); 286 (4-pole)	330 (3-pole); 286 (4-pole)	–	–
–	–	275	–	–
–	–	154	–	–

3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2 (continued)

1

AC



3WA11

3WA12

Breaking capacity			N	S	M	H new	E	S	M	H	C	E
Rated short-time withstand current $I_{cw}^{1)}$												
I_{cw} at U_e up to 500 V AC	0.5 s	kA	55	66	85	85	—	66	85	100	100	—
	1 s	kA	50	66	85	85	—	66	85	85	100	—
	2 s	kA	35 ^{2)/45 ³⁾}	45	70	70	—	66	66 ^{4)/85 ⁵⁾}	66 ^{4)/85 ⁵⁾}	85	—
	3 s	kA	30 ^{2)/35 ³⁾}	35	60	60	—	55 ^{4)/66 ⁵⁾}	55 ^{4)/75 ⁵⁾}	55 ^{4)/75 ⁵⁾}	75	—
I_{cw} at U_e up to 690 V AC	0.5 s	kA	42	50	66	66	85	50	66	85	100	85
	1 s	kA	42	50	66	66	85	50	66	85	100	85
	2 s	kA	35 ^{2)/42 ³⁾}	45	66	66	70	50	66	66 ^{4)/85 ⁵⁾}	85	66 ^{4)/85 ⁵⁾}
	3 s	kA	30 ^{2)/35 ³⁾}	35	60	60	60	50	55 ^{4)/66 ⁵⁾}	55 ^{4)/75 ⁵⁾}	75	55 ^{4)/75 ⁵⁾}
I_{cw} at U_e up to 1000 V AC	0.5 s	kA	—	—	—	—	50	—	—	—	—	85
	1 s	kA	—	—	—	—	50	—	—	—	—	85
	2 s	kA	—	—	—	—	50	—	—	—	—	66 ^{4)/85 ⁵⁾}
	3 s	kA	—	—	—	—	50	—	—	—	—	55 ^{4)/75 ⁵⁾}
I_{cw} at U_e up to 1150 V AC	0.5 s	kA	—	—	—	—	—	—	—	—	—	70
	1 s	kA	—	—	—	—	—	—	—	—	—	70
	2 s	kA	—	—	—	—	—	—	—	—	—	50
	3 s	kA	—	—	—	—	—	—	—	—	—	50
I_{cw} at U_e up to 220 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 300 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 600 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 1000 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 1500 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers												
Up to 500 V AC	kA	55	66	85	—	—	66	85	100	100	—	—
Up to 690 V AC	kA	42	50	66	—	85	50	66	85	100	85	—
Up to 1000 V AC	kA	—	—	—	—	50	—	—	—	—	85	—
Up to 1150 V AC	kA	—	—	—	—	—	—	—	—	—	70	—
Up to 220 V DC	kA	—	—	—	—	—	—	—	—	—	—	—
Up to 300 V DC	kA	—	—	—	—	—	—	—	—	—	—	—
Up to 600 V DC	kA	—	—	—	—	—	—	—	—	—	—	—
Up to 1000 V DC	kA	—	—	—	—	—	—	—	—	—	—	—
Up to 1500 V DC	kA	—	—	—	—	—	—	—	—	—	—	—
IT network capability												
1-pole short-circuit breaking capacity I_{IT}	≤ 500 V	kA	50	50	50	50	—	50	50	50	50	—
acc. to IEC 60947-2 Annex H	≤ 690 V	kA	—	—	—	—	50	—	—	—	—	50
	1000 V	kA	—	—	—	—	—	—	—	—	—	—

¹⁾ At rated operational voltage $U_e \geq 690$ V, the I_{cw} value of the circuit breaker corresponds to the I_{cu} or I_{cs} value

²⁾ Size 1 with $I_{n \max} \leq 1250$ A

³⁾ Size 1 with $I_{n \max} \geq 1600$ A

⁴⁾ $I_{n \max} \leq 2500$ A

⁵⁾ $I_{n \max} \geq 3200$ A

AC



DC



1

3WA13

3WA12

H	C	E	D	E
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
50	50	–	–	–
–	–	50	–	–
–	–	–	–	–

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2

3WA11

Rated current I_n

630 A

800 A

1000 A

1250 A

1600 A

2000 A

2500 A

General data

Isolating function acc. to EN 60947-2

Yes

Utilization category

B

Permissible ambient temperature Operation

°C

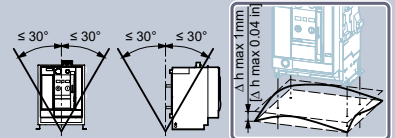
-40 ... +70

Storage

°C

-40 ... +80

Mounting position



Degree of protection

IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover

Voltage

Rated operational voltage U_e at 50/60 Hz

1000 V version

V AC

≤ 1000

Rated insulation voltage U_i

V AC

1000

Rated impulse withstand voltage U_{imp}

Main conducting paths

kV

12

Auxiliary circuits

kV

4

Control circuits

kV

2.5

Permissible load ¹⁾

Permissible load for withdrawable versions

For all connection types (except rear vertical main connections)

Up to 40 °C (Cu bare)

A

630

800

1000

1250

1600

2000

–

Up to 55 °C (Cu bare)

A

630

800

1000

1250

1600

2000

–

Up to 60 °C (Cu bare)

A

630

800

1000

1250

1600

1930

–

Up to 70 °C (Cu bare)

A

630

800

1000

1210

1490

1780

–

With rear vertical connections

Up to 55 °C (Cu bare)

A

630

800

1000

1250

1600

2000

2500

Up to 60 °C (Cu bare)

A

630

800

1000

1250

1600

2000

2370

Up to 70 °C (Cu bare)

A

630

800

1000

1250

1545

1855

2060

Permissible load for fixed-mounted versions

For all connection types (except rear vertical main connections)

Up to 55 °C (Cu bare)

A

630

800

1000

1250

1600

2000

–

Up to 60 °C (Cu bare)

A

630

800

1000

1250

1600

2000

–

Up to 70 °C (Cu bare)

A

630

800

1000

1250

1600

2000

–

With rear vertical connections

Up to 55 °C (Cu bare)

A

630

800

1000

1250

1600

2000

2500 ²⁾

Up to 60 °C (Cu bare)

A

630

800

1000

1250

1600

2000

2500 ²⁾

Up to 70 °C (Cu bare)

A

630

800

1000

1250

1600

2000

2500 ²⁾

Power loss at I_n

With 3-phase symmetrical load with maximum rated current, complete device (3/4p)

Fixed-mounted

W

30

45

70

105

135

240

360

Withdrawable versions

W

55

85

130

205

310

440

600

¹⁾ The stated temperatures are the ambient temperatures of the circuit breaker

²⁾ Copper bars painted black

³⁾ Only flange connections are available

⁴⁾ 4000 A up to 65 °C

⁵⁾ For 4000 A circuit breakers with horizontal connection, 5 × 100 × 10 mm bars are required

3WA12



3WA13



1

2000 A			2500 A	3200 A	3600 A new	3-pole	4000 A ⁵⁾	4-pole	4-pole N pole left with option D04	4000 A	5000 A	6300 A
Yes						Yes						
B						B						
-40 ... +70						-40 ... +70						
-40 ... +80						-40 ... +80						
IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover						IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover						
≤ 1150						≤ 1150						
≤ 1150						≤ 1150						
12						12						
4						4						
2.5						2.5						
2000	2500	3200	3600 ³⁾	4000	4000	4000	4000	5000	—			
2000	2500	3020	3490 ³⁾	3750	3750	3750	4000	5000	—			
2000	2500	3020	3380 ³⁾	3620	3620	3620	4000	5000	—			
2000	2280	2870	3150 ³⁾	3360	3360	3360	4000	5000	—			
2000	2500	3200	—	4000	4000	4000	4000	5000	5920			
2000	2500	3200	—	3910	3910	3910	4000	5000	5810			
2000	2390	2945	—	3645	3645	3645	4000	5000	5500			
2000	2500	3200	—	4000	4000	4000	4000	5000	—			
2000	2500	3200	—	4000	4000 ⁴⁾	4000	4000	5000	—			
2000	2500	3200	—	4000	3860	4000	4000	5000	—			
2000	2500	3200	—	4000	4000	4000	4000	5000	6300			
2000	2500	3200	—	4000	4000	4000	4000	5000	6300			
2000	2500	3200	—	4000	4000	4000	4000	5000	5920			
Connections: vertical horizontal												
180	270	410	—	760 805	760 830	760 805	520	630	900			
320	520	710	800	1040 1170	1040 1200	1040 1170	810	1050	1600			

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Switching times									
Make time (mechanical)		ms				35			
Electrical make time (through closing coil 100% OP)		ms				80			
Electrical make time (through closing coil 5% OP)		ms				50			
Opening time (mechanical)		ms				38			
Electrical opening time (through shunt trip 100% OP)		ms				80			
Electrical opening time (through shunt trip 5% OP)		ms				50			
Electrical opening time (through undervoltage release)		ms				80 ²⁾			
Opening time due to ETU (instantaneous short-circuit release)		ms				50			
Service life/endurance									
Breaking capacity N, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance ¹⁾	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles			30000				
Breaking capacity S, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance ¹⁾	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles			30000				
Breaking capacity M, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance ¹⁾	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles			20000				
Breaking capacity E, 3/4-pole³⁾									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance ¹⁾	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	Without maintenance 1000 V	Operating cycles				1000			
	Without maintenance 1150 V	Operating cycles				–			
	With maintenance ¹⁾	Operating cycles				20000			
Breaking capacity H, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance ¹⁾	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles				20000			
Breaking capacity C, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance ¹⁾	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance 690 V ¹⁾	Operating cycles				–			
Switching frequency (Electrical operating cycles)									
Breaking capacity N and S									
	3-pole	1/h				45			
	4-pole	1/h				45			
Breaking capacity M and H									
	3-pole	1/h				45			
	4-pole	1/h				60			
Breaking capacity C									
	3-pole	1/h				–			
	4-pole	1/h				–			
Breaking capacity E³⁾									
≤ 690 V	3-pole	1/h				45			
	4-pole	1/h				60			
1000 V/1150 V	3-pole	1/h				20			
	4-pole	1/h				20			

¹⁾ Maintenance means: Replacing main contact elements and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).

²⁾ Opening time with short-time delay of the undervoltage release can be set up to 200 ms

³⁾ On E class circuit breakers, the main contact elements can only be replaced in the factory

3WA12



3WA13



1

2000 A		2500 A	3200 A	3600 A new	4000 A	4000 A	5000 A	6300 A
			35				35	
			80				100	
			50				50	
			34				34	
			80				73	
			50				50	
			80 ²⁾				80 ²⁾	
			50				50	
			–				–	
			–				–	
			–				–	
			–				–	
			10000				–	
			20000				–	
7500	7500		4000	2000	2000		–	
			20000				–	
			10000				–	
			20000				–	
7500	7500		4000	2000	2000		–	
			20000				–	
			10000				5000	
			20000				10000	
7500	7500		4000	2000	2000		1000	
			1000				1000	
			500				500	
			20000				10000	
			10000				7500	
			20000				15000	
7500	7500		4000	2000	2000		2000	
20000	20000		20000	20000	20000		15000	
			5000	–	–		5000	
			10000	–	–		10000	
			5000	–	–		1000	
			10000	–	–		10000	
			45 ⁴⁾				–	
			60 ⁴⁾				–	
			45				60 ⁵⁾	
			60				60 ⁵⁾	
		60		–			60	
		60		–			60	
		45					60	
		60					60	
		20					20	
		20					20	

⁴⁾ Breaking capacity N not available in frame size 2⁵⁾ Breaking capacity N not available in frame size 3

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Connection									
Minimum main conductor cross-sections (horizontal, front and flange connection)									
Copper bars, Cu, bare		Unit x mm x mm	1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	1 x 60 x 10	1 x 60 x 10	1 x 60 x 10	1 x 60 x 10
Copper bars, Cu, painted black		Unit x mm x mm	1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	1 x 60 x 10	1 x 60 x 10	1 x 60 x 10	1 x 60 x 10
Minimum main conductor cross-sections (vertical connection)									
Copper bars, Cu, bare		Unit x mm x mm	1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	2 x 40 x 10	2 x 50 x 10	3 x 50 x 10	4 x 100 x 5 2 x 100 x 10
Copper bars, Cu, painted black		Unit x mm x mm	1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	2 x 40 x 10	2 x 50 x 10	3 x 50 x 10	4 x 100 x 5 2 x 100 x 10
Auxiliary conductor (Cu) max. number of auxiliary conductors x cross-section (solid/stranded)									
Standard connection = push-in	Without end sleeve					2 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 1					2 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 4					2 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)			
	With twin end sleeve					2 x 0.5 ... 1.5 mm ² (AWG 20 ... 16)			
	Stripped length					10 ... 11 mm (0,39 ... 0,43 inch)			
Optional connection with screw connection	Without end sleeve		2 x 0,5 ... 1,5 mm ² (AWG 20 ... 16)/1 x 0,5 ... 2,5 mm ² (AWG 20 ... 14)						
	With end sleeve acc. to DIN 46228 Part 1		2 x 0,5 ... 1,5 mm ² (AWG 20 ... 16)/1 x 0,5 ... 2,5 mm ² (AWG 20 ... 14)						
	With end sleeve acc. to DIN 46228 Part 4				1 x 0,5 ... 1,5 mm ² (AWG 20 ... 16)				
	With twin end sleeve				1 x 0,5 ... 1,5 mm ² (AWG 20 ... 16)				
	Stripped length				7 ... 8 mm (0.28 ... 0.31 inch)				
Position signaling switch modul									
Spring-loaded terminals for standard signaling contacts	Without end sleeve					0,2 ... 2,5 mm ² (AWG 28 ... 12)			
	With end sleeve acc. to DIN 46228 Part 4					0,25 ... 1,5 mm ² (AWG 20 ... 16)			
	Stripped length					5 ... 6 mm (0.2 ... 0.24 inch)			
Push-in connection for standard signaling contacts	Solid					0,5 ... 2,5 mm ² (AWG 20 ... 12)			
	With end sleeve					0,5 ... 1,5 mm ² (AWG 20 ... 16)			
	Stripped length					10 ... 12 mm (0,39 ... 0,47 inch)			
Push-in connection for COM signaling contacts	Solid					0,5 ... 2,5 mm ² (AWG 20 ... 12)			
	With end sleeve					0,5 ... 1,5 mm ² (AWG 20 ... 16)			
	Stripped length					10 ... 12 mm (0,39 ... 0,47 inch)			
Weights ¹⁾									
3-pole	Fixed-mounted circuit breaker	kg	38.5	38.5	38.5	42.5	42.5	43.5	43.5
	Withdrawable circuit breaker without guide frame	kg	39	39	39	40	40	41	41
	Guide frames	kg	26	26	26	27	27	29	29
4-pole	Fixed-mounted circuit breaker	kg	47	47	47	52	52	53	53
	Withdrawable circuit breaker without guide frame	kg	45	45	45	46	46	47	47
	Guide frames	kg	30	30	30	32	32	34	34

¹⁾ Only available as a flange connection

Weights refer to:

- Breakers with the lowest breaking capacity in each case (size 1: breaking capacity N, size 2: breaking capacity S, size 3: breaking capacity H)
- Breakers with ETU600 (LSI)
- Fixed-mounted circuit breakers/guide frames with vertical connections
- Guide frame with position signaling switch
- Without any other accessories

3WA12



3WA13



1

2000 A	2500 A	3200 A	3600 A new	4000 A	4000 A	5000 A	6300 A
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	5 × 100 × 10 ¹⁾	5 × 100 × 10	4 × 100 × 10	6 × 100 × 10	–
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	5 × 100 × 10 ¹⁾	5 × 100 × 10	4 × 100 × 10	6 × 100 × 10	–
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	–	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	–	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)					2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)		
2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)					2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)		
2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)					2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)		
2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)					2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)		
10 ... 11 mm (0,39 ... 0,43 inch)					10 ... 11 mm (0,39 ... 0,43 inch)		
2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)/1 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)					2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)/1 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)		
2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)/1 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)					2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)/1 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)		
1 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)					1 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)		
1 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)					1 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)		
7 ... 8 mm (0,28 ... 0,31 inch)					7 ... 8 mm (0,28 ... 0,31 inch)		
0,2 ... 2,5 mm ² (AWG 28 ... 12)					0,2 ... 2,5 mm ² (AWG 28 ... 12)		
0,25 ... 1,5 mm ² (AWG 20 ... 16)					0,25 ... 1,5 mm ² (AWG 20 ... 16)		
5 ... 6 mm (0,2 ... 0,24 inch)					5 ... 6 mm (0,2 ... 0,24 inch)		
0,5 ... 2,5 mm ² (AWG 20 ... 12)					0,5 ... 2,5 mm ² (AWG 20 ... 12)		
0,5 ... 1,5 mm ² (AWG 20 ... 16)					0,5 ... 1,5 mm ² (AWG 20 ... 16)		
10 ... 12 mm (0,39 ... 0,47 inch)					10 ... 12 mm (0,39 ... 0,47 inch)		
0,5 ... 2,5 mm ² (AWG 20 ... 12)					0,5 ... 2,5 mm ² (AWG 20 ... 12)		
0,5 ... 1,5 mm ² (AWG 20 ... 16)					0,5 ... 1,5 mm ² (AWG 20 ... 16)		
10 ... 12 mm (0,39 ... 0,47 inch)					10 ... 12 mm (0,39 ... 0,47 inch)		
55	57	69	On request	77	113	115	115
52	54	59	On request	59	91	92	92
33.5	35.5	36.5	On request	40	85.5	87	87
68.5	71.5	86.5	On request	97.5	147.5	149.5	149.5
63.5	66	73	On request	73	115.5	116.5	116.5
40	42.5	51.5	On request	53	103.5	105.5	105.5

3WA1 non-automatic circuit breakers for DC

IEC 60947-2

3WA12



Rated current I_n

General data

			1000 A	2000 A	4000 A
Isolating function acc. to EN 60947-2			Yes		
Utilization category			B		
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C)	°C	-40 ... +70		
	Storage	°C	-40 ... +80		
Mounting position					
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		

Voltage

Rated operational voltage U_e	Breaking capacity D E	V DC	600 1000 (3-pole); 1500 (4-pole)		
Rated insulation voltage U_i	Breaking capacity D E	V DC	600 1000 (3-pole); 1500 (4-pole)		
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12		
	Auxiliary circuits	kV	4		
	Control circuits	kV	2.5		

Permissible load

Permissible load for withdrawable versions

For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	3640
	Up to 60 °C (Cu bare)	A	1000	2000	3500
	Up to 70 °C (Cu bare)	A	1000	1950	3250
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	3640
	Up to 70 °C (Cu bare)	A	1000	2000	3400

Permissible load for fixed-mounted versions

For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	3900
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	4000

Power loss at I_n

With 3-phase symmetrical load, complete device (3/4p)	Withdrawable versions 3-/4-pole	W	170 220	320 420	750 1000
	Fixed-mounted 3-/4-pole	W	130 190	240 360	500 660

Switching times

Make time (mechanical)	ms	35	35	35
Electrical make time (through closing coil 100% OP)	ms	80	80	80
Electrical make time (through closing coil 5% OP)	ms	50	50	50
Opening time (mechanical)	ms	34	34	34
Electrical opening time (through shunt trip 100% OP)	ms	80	80	80
Electrical opening time (through shunt trip 5% OP)	ms	50	50	50
Service opening time (über undervoltage release)	ms	80 ¹⁾	80 ¹⁾	80 ¹⁾

Service life/endurance

Breaking capacity D, 3-/4-pole

Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Electrical	Without maintenance 600 V	Operating cycles	6000	6000	4000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000

¹⁾ Opening time with short-time delay of the undervoltage release can be set up to 200 ms

3WA12



1

Rated current I _n			1000 A	2000 A	4000 A
Service life/endurance					
Breaking capacity E, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Electrical	Without maintenance 1000 V	Operating cycles	1000	1000	1000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Breaking capacity E, 4-pole					
Electrical	Without maintenance 1500 V ²⁾	Operating cycles	1000	1000	1000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Switching frequency (Electrical operating cycles)					
Breaking capacity D					
	3- and 4-pole	1/h	45/60	45/60	45/60
Breaking capacity E					
	3- and 4-pole ³⁾	1/h	20/20	20/20	20/20
Connection					
Minimum cross-sections of main conductor bars (infeed and load connections)					
Copper bars, bare or painted black		Unit × mm × mm	1 × 60 × 10	3 × 100 × 5; 2 × 80 × 10	4 × 100 × 10
Minimum cross-sections of main conductor bars (pole straps) ⁴⁾					
Copper bars, bare or painted black		Unit × mm × mm	1 × 100 × 10; (2 × 100 × 5)	2 × 100 × 5; (2 × 100 × 10)	3 × 100 × 10; vertikal
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)					
Standard connection = push-in	Without end sleeve		2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 4		2 × 0,5 ... 2,5 mm ² (AWG 20 ... 14)		
	With twin end sleeve		2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		10 ... 11 mm (0,39 ... 0,43 inch)		
Optional connection with screw connection	Without end sleeve		2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)/ 1 × 0,5 ... 2,5 mm ² (AWG 2014)		
	With end sleeve acc. to DIN 46228 Part 1		2 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)/ 1 × 0,5 ... 2,5 mm ² (AWG 2014)		
	With end sleeve acc. to DIN 46228 Part 4		1 × 0,5 ... 1,5 mm ² (AWG 20 ... 16)		
	With twin end sleeve		1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)		
Position signaling switch module					
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0,2 ... 2,5 mm ² (AWG 28 ... 12)		
	With end sleeve acc. to DIN 46228 Part 4		0,25 ... 1,5 mm ² (AWG 20 ... 16)		
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)		
Push-in connection for standard signaling contacts	Solid		0,5 ... 2,5 mm ² (AWG 20 ... 12)		
	With end sleeve		0,5 ... 1,5 mm ² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0,39 ... 0,47 inch)		
Push-in connection for COM signaling contacts	Solid		0,5 ... 2,5 mm ² (AWG 20 ... 12)		
	With end sleeve		0,5 ... 1,5 mm ² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0,39 ... 0,47 inch)		
Weights ³⁾					
3-pole	Fixed-mounted circuit breaker	kg	55	55	68
	Withdrawable circuit breaker without guide frame	kg	52	52	59
	Guide frames	kg	34	34	50
4-pole	Fixed-mounted circuit breaker	kg	68.5	68.5	86.5
	Withdrawable circuit breaker without guide frame	kg	63.5	63.5	74
	Guide frames	kq	40.5	40.5	61.5

¹⁾ Maintenance means: Replacing main contact elements and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).

²⁾ 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.

³⁾ Weights refer to:












- Breakers with breaking capacity E
- Fixed-mounted circuit breakers/guide frames with vertical connections
- Guide frame with position signaling switch
- Without any other accessories

⁴⁾ For more information on the DC pole straps, see the Equipment Manual for 3WA1

3WA1 non-automatic circuit breakers for DC

Application examples

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

Minimum required contact gaps at rated voltage	DC 1-pole disconnection Grounded system	DC 2-pole (all-pole) disconnection Grounded system	Non-grounded system
Rated operational voltage up to 300 V			
 I201_20262	 I201_20251	 I201_20252	 I201_20253
Rated operational voltage up to 600 V			
 I201_20263	 I201_20254	 I201_20255	 I201_20253
Rated operational voltage up to 1000 V			
 I201_20264	 I201_20256	 I201_20260	 I201_20258
Rated operational voltage up to 1500 V			
 I201_20265	 I201_20259		 I201_20258

Note:

DC 2-pole (all-pole) disconnection; grounded system

The grounded conductor must always be assigned to the individual switching pole of the non-automatic air circuit breaker, so that in the event of a ground fault there are always 2 conducting paths in series in a circuit with 3-pole circuit breakers, and 3 conducting paths in series in a circuit with 4-pole circuit breakers. The jumpers between the switching poles must be short-circuit and ground-fault proof.

Electronic trip unit

Differentiation

1



	ETU300 electronic trip unit	ETU600 electronic trip unit
Function		
Protective function LSI	■	■
Protective function LSIG	■	■
Protective function LSIG Hi-Z	—	■
Neutral conductor protection (N)	■	■
Metering function	—	■
Enhanced Protective functions	—	■
CubicleBUS ²	—	■
Display	—	■
DAS+ input/output	■	■
LED display of reason for tripping	■	■
Bluetooth and USB	—	■
FW Updates	—	■
Internal self-test with and without tripping	■	■
Extended test option (tripping characteristic)	—	■
Activation of the ETU via powerbank	—	■
Activation of the ETU for self-test via TD400	■	—

Note:
By replacing the electronic trip unit, it is possible to upgrade from ETU300 to ETU600.

ETU300 electronic trip unit

Protective functions

ETU300 LSI, ETU300 LSIG

Protective function	Setting range and invariable parameters	Values
L: Overload protection LT		
Tripping	Switched on	
Current setting I_r	0.4 ... $1.0 \times I_n$	0.4/0.5/0.6/0.7/0.75/0.8/0.85/0.9/0.95/1.0 $\times I_n$
Tripping time t_r at $6 \times I_r$	0.75 ... 25 s	0.75/1/2/5/8/10/14/17/21/25 s
Characteristic LT curve	I^2t	
Thermal memory	Switched on	
Cooling time constant	$18 \times t_r$	
Phase failure detection	Switched on	
L: Overload protection LT, neutral conductor		
Tripping	Switched on	
Current setting I_N	$1.0 \times I_n$	
S: Short-time-delayed short-circuit protection ST		
Tripping	Can be switched on/off	
Current setting I_{sd}	1.5 ... $10 \times I_n$ max. $0.8 \times I_{cw}^{1)}$	OFF/1.5/2/2.5/3/4/5/6/8/10 $\times I_r$ max. $0.8 \times I_{cw}^{1)}$
Tripping time t_{sd}	0.08 ... 0.4 s	0.08/0.15/0.22/0.3/0.4 s
Characteristic ST curve	I^2t and I^0t	
Reference point $I_{ST\ ref}$	$8 \times I_r$	
I: Instantaneous short-circuit protection INST		
Tripping	Switched on	
Current setting I_i	1.5 ... $15 \times I_n$ max. $0.8 \times I_{cs}^{1)}$	1.5/2/3/4/5/6/8/10/12/15 $\times I_n$ max. $0.8 \times I_{cs}^{1)}$
Maintenance mode DAS+		
Current setting I_{DAS+}	$1.5 \times I_n$	Activation via ETU input

ETU300 LSIG

Protective function	Setting range	
G: Ground-fault protection GF		
Tripping	Switched on	
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor
Characteristic GF curve		I^0t
Current setting I_g		$0.2 \times I_n$ (min. 100 A, max. 1200 A)
Tripping time t_g	0.2 s	

¹⁾ The setting value is limited as a function of the breaking capacity at rated operational voltage U_e .

ETU600 electronic trip unit

Protective functions

1

			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z							
Protective function	Variable setting range	Setting values with rotary switch					
L: Overload protection LT							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_r	$0.4 \dots 1.0 \times I_n$	0.5/0.6/0.7/0.75/0.8/0.85/0.9/ 0.95/1.0 $\times I_n$	■	■	■	■	■
Tripping time t_r at $6 \times I_r$	At I^2t : $0.5 \dots 30$ s and at I^4t : $0.5 \dots 5$ s	1/2/5/8/10/14/17/21/25 s	■	■	■	■	■
Characteristic LT curve	I^2t and I^4t		■	■	■	■	■
Thermal memory	Can be switched on/off		■	■	■	■	■
Cooling time constant	10 and $18 \times t_r$		■	■	■	■	■
Phase failure detection	Can be switched on/off		■	■	■	■	■
Overload pre-alarm PAL	Can be switched on/off		■	■	■	■	■
Current setting $I_{r\text{ PAL}}$	$0.7 \dots 1.0 \times I_r$		■	■	■	■	■
Delay time $t_{r\text{ PAL}}$	$0.5 \dots 1.0 \times t_r$		■	■	■	■	■
L: Overload protection LT, neutral conductor							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{rN}	$0.2 \dots 2.0 \times I_n$ for 4-pole circuit breakers max. $I_{n\text{ max}}$		■	■	■	■	■
Current setting $I_{rN\text{ PAL}}$	$0.7 \dots 1.0 \times I_{rN}$		■	■	■	■	■
S: Short-time-delayed short-circuit protection ST							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{sd}	$0.6 \times I_n \dots 0.8 \times I_{cw}$ max. $0.8 \times I_{cw}^{1)}$	$1.5/2/2.5/3/4/5/6/8/10 \times I_r$ max. $0.8 \times I_{cw}^{1)}$	■	■	■	■	■
Tripping time t_{sd}	$0.02 \dots 0.4$ s	At Fix: $0.08/0.15/0.22/0.3/0.4$ s At I^2t : $0.1/0.2/0.3/0.4$ s	■	■	■	■	■
Characteristic ST curve	I^0t and I^2t		■	■	■	■	■
Reference point $I_{ST\text{ ref}}$	$6-12 \times I_r$		■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
S: Directional short-time-delayed short-circuit protection dST							
Tripping	Can be switched on/off		□	□	□	■	■
Direction setting	Forward: ↓ or ↑		□	□	□	■	■
Current setting $I_{sd\text{ FW}}$	$0.6 \times I_n \dots 0.8 \times I_{cw}$		□	□	□	■	■
Current setting $I_{sd\text{ REV}}$	$0.6 \times I_n \dots 0.8 \times I_{cw}$		□	□	□	■	■
Tripping time $t_{sd\text{ FW}}$	$0.05 \dots 0.4$ s		□	□	□	■	■
Tripping time $t_{sd\text{ REV}}$	$0.05 \dots 0.4$ s		□	□	□	■	■
I: Instantaneous short-circuit protection INST							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_i	$1.5 \times I_n \dots 0.8 \times I_{cs}$ max. $0.8 \times I_{cs}^{1)}$	$1.5/2/3/4/6/8/10/12/15 \times I_n$ max. $0.8 \times I_{cs}^{1)}$	■	■	■	■	■

¹⁾ The setting value is limited as a function of the breaking capacity at the set rated voltage.

- Available, feature of the application package
- Can be retrofitted

			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSI, ETU600 LSIG, ETU600 LSIG HI-Z							
Protective function	Variable setting range	Setting values with rotary switch					
Reverse power protection RP							
Tripping	Can be switched on/off		☐	☐	☐	☒	☒
Setting value P_{RP}	$0.05 \dots 0.5 \times P_n$		☐	☐	☐	☒	☒
Tripping time t_{RP}	$0.01 \dots 25 \text{ s}$		☐	☐	☐	☒	☒
Enhanced Protective functions EPF							
Phase unbalance current and phase unbalance voltage			☐	☐	☐	☒	☒
Undervoltage and overvoltage			☐	☐	☐	☒	☒
Active power import and active power export			☐	☐	☐	☒	☒
Underfrequency and overfrequency			☐	☐	☐	☒	☒
Total harmonic distortion for current and voltage			☐	☐	☐	☒	☒
Phase sequence detection			☐	☐	☐	☒	☒
Maintenance mode DAS+							
Current setting I_{DAS+}	$1.5 \dots 10 \times I_n$		☒	☒	☒	☒	☒
Current setting I_{gDAS+}	With LSIG GFx option plug Residual: – Sizes 1 and 2: $100 \dots 2000 \text{ A}$ and – Size 3: $400 \dots 2000 \text{ A}$ Direct: $15 \dots 2000 \text{ A}$		☒	☒	☒	☒	☒
Tripping time t_{gDAS+}	$0 \dots 5 \text{ s}$		☒	☒	☒	☒	☒
Options							
Parameter set changeover	Switchable between parameter set A and B		☐	☐	☐	☒	☒
Limit values	Undershooting, overshooting		☒	☒	☒	☒	☒
Waveform memory			☐	☐	☐	☐	☒

- ☒ Available, feature of the application package
☐ Can be retrofitted

ETU600 electronic trip unit

Protective functions

1

ETU600 LSI

Protective function	Variable setting range	Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
G: Ground fault GF alarm						
Alarm	Can be switched on/off	☐	☐	☐	☒	☒
Current setting $I_{g \text{ alarm}}$ with LSI GFx option plug	Detection method	Sizes 1 and 2: 100 ... 5000 A	☐	☐	☒	☒
	Residual	Size 3: 400 ... 5000 A	☐	☐	☒	☒
	Detection method	15 ... 5000 A	☐	☐	☒	☒
	Direct		☐	☐	☒	☒
Alarm time $t_{g \text{ alarm}}$	0 ... 0.5 s	☐	☐	☐	☒	☒

■ Available, feature of the application package
☐ Can be retrofitted

ETU600 LSIG

Protective function	Variable setting range	Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
G: Ground fault GF						
Tripping	Can be switched on/off	☒	☒	☒	☒	☒
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor	☒	☒	☒	☒
	Direct	Direct metering of the ground-fault current with a current transformer	☒	☒	☒	☒
	Dual	Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Metering of the ground-fault current with an external current transformer	☒	☒	☒	☒
Characteristic GF curve	With LSI GFx option plug	For Fix $(I^0t)/I^2t/I^4t/I^6t$	☒	☒	☒	☒
Current setting I_g with LSI GFx option plug	Detection method	Sizes 1 and 2: 100 ... 2000 A	☒	☒	☒	☒
	Residual	Size 3: 400 ... 2000 A	☒	☒	☒	☒
	Detection method	15 ... 2000 A	☒	☒	☒	☒
	Direct		☒	☒	☒	☒
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	☒	☒	☒	☒
	For I^0t at $3 \times I_g$	0 ... 30 s	☒	☒	☒	☒
	$t_{g \text{ def}}$ at I^0t	0.05 ... 0.5 s	☒	☒	☒	☒
Intermittent detection	Can be switched on/off	☒	☒	☒	☒	☒
G: Ground fault GF alarm						
Alarm	Can be switched on/off	☒	☒	☒	☒	☒
Current setting $I_{g \text{ alarm}}$ with LSI GFx option plug	Detection method	Sizes 1 and 2: 100 ... 5000 A	☒	☒	☒	☒
	Residual	Size 3: 400 ... 5000 A	☒	☒	☒	☒
	Detection method	15 ... 5000 A	☒	☒	☒	☒
	Direct		☒	☒	☒	☒
Alarm time $t_{g \text{ alarm}}$	0 ... 0.5 s	☒	☒	☒	☒	☒

■ Available, feature of the application package

			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSIG Hi-Z							
Protective function	Variable setting range						
G: Ground fault GF Hi-Z							
Tripping	Can be switched on/off		■	■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor	■	■	■	■	■
	Dual Hi-Z, for high-impedance connection of the external current transformers	Protection zone UREF: Detection of the ground-fault current by means of summation current formation Protection zone REF: Metering of the ground-fault current with an external current transformer combination	■	■	■	■	■
Characteristic GF curve	With LSIG GFx option plug	For Fix (I^0t)/ I^2t / I^4t / I^6t	■	■	■	■	■
Current setting I_g with LSIG GFx option plug	Protection zone UREF	Size 2: 100 ... 2000 A and Size 3: 400 ... 2000 A	■	■	■	■	■
	Protection zone REF	15 ... 2000 A	■	■	■	■	■
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	■	■	■	■	■
	For I^0t $3 \times I_g$ in protection zone UREF	0 ... 30 s	■	■	■	■	■
	$t_{g\text{ def}}$ at I^0t	0.05 ... 0.5 s	■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
G: Ground fault GF alarm							
Alarm	Can be switched on/off		■	■	■	■	■
Current setting $I_{g\text{ alarm}}$ with LSIG GFx option plug	Protection zone UREF	Size 2: 100 ... 5000 A and Size 3: 400 ... 5000 A	■	■	■	■	■
Alarm time $t_{q\text{ alarm}}$	0 ... 0.5 s		■	■	■	■	■

■ Available, feature of the application package

ETU600 electronic trip unit

Operation, interfaces and metering function

		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring	Non- automatic air circuit breakers
ETU600							
Operation and interfaces							
Rotary switch		■	■	■	■	■	—
Display and operating keys		■	■	■	■	■	—
SETRON Powerconfig configuration software		■	■	■	■	■	—
Fieldbus communication		■	■	■	■	■	—
Color display		■	■	■	■	■	—
Bluetooth ¹⁾ and USB interface		■	■	■	■	■	—
Communication							
Prepared for connection of a communications module (ready4COM feature)	Status messages of the circuit breaker	□	■	■	■	■	□
	Status messages of the ETU600 electronic trip unit	□	■	■	■	■	—
	Remote operation, requires a communications module, closing coil, shunt trip	□	■	■	■	■	□
Communications module		□	□	□	□	□	□
Digital input and output on the ETU600 electronic trip unit							
Parameterizable input	For activating Maintenance mode DAS+ or can be used for parameter set changeover	■	■	■	■	■	—
Parameterizable output	Usable as "life contact", early trip contact, and for displaying "Parameter set B active" or "Maintenance mode DAS+ active"	■	■	■	■	■	—

¹⁾ A country-specific radio license is required to operate the Bluetooth interface.
Before activating the Bluetooth function, ensure that the license is available:
www.siemens.com/lowvoltage/certificates

- Not available
- Available, feature of the application package
- Can be retrofitted

		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600						
Metering function						
Integrated voltage tap at top/bottom		–	–	■	■	■
Voltage tap module VTM		–	–	■	■	■
Type acc. to IEC 61557-12	PMF-I	–	–	■	■	■
	PMF-II	–	–	–	■	■
	PMF-III	–	–	–	–	■
Metering values						
Temperature		–	■	■	■	■
Accuracy according to IEC 61557-12						
Phase current I_{L1}, I_{L2}, I_{L3}	Class 1	■	■	■	■	■
Neutral conductor current I_N	Class 1	■	■	■	■	■
Voltage U_{LN}	Class 0.5	–	–	■	■	■
Voltage U_{LL}	Class 0.5	–	–	■	■	■
Active energy E_a	Class 2	–	–	■	■	■
Active power P	Class 2	–	–	–	■	■
Accuracy according to manufacturer's specifications						
Ground-fault current I_g with ETU600 LSI	2%	–	–	–	■	■
Ground-fault current I_g with ETU600 LSIG, ETU600 LSIG Hi-Z	2%	■	■	■	■	■
Reactive energy E_r	2%	–	–	–	■	■
Apparent energy E_{ap}	2%	–	–	–	■	■
Reactive power Q	2%	–	–	–	■	■
Apparent power S	2%	–	–	–	■	■
Power factor PF	6%	–	–	–	■	■
$\cos \varphi$	6%	–	–	–	■	■
Frequency f	0.5%	–	–	–	■	■
Current unbalance	2.5%	–	–	–	■	■
Voltage unbalance	1.5%	–	–	–	■	■
Total harmonic distortion $THD-I^{1)}$	2%	–	–	–	–	■
Total harmonic distortion $THD-U^{1)}$	2%	–	–	–	–	■
Harmonic $I, U^{1)}$	2%	–	–	–	–	■

¹⁾ For 2nd to 15th harmonic $\pm 2\%$ and for 16th to 31st harmonic $\pm 5\%$

■ Available, feature of the application package

– Not available

Licenses for activating the test function in SENTRON Powerconfig software

License (ALM)	Test scope	Test values can be set	Documentation	Article No.
Basic (unlimited)	LSIG	No	No	Free available
Standard (365 days)	LSIG	Yes	Yes	7KN2720-OCE00-1YC1
Extended new (365 days)	- LSIG - dST - Phase unbalance current - Phase unbalance voltage - Total harmonic distortion (THD) for current and voltage (from Powerconfig V3.28) - Undervoltage, overvoltage - Forward power - Reverse power - Underfrequency - Overfrequency - Phase sequence detection	Yes	Yes	7KN2720-OCE00-2YC1


Connection

Main circuit connection


3WA11 – 3WA13

Fixed-mounted




Withdrawable




Rear horizontal




Rear vertical

Horizontal on top,
vertical at the bottomVertical on top,
horizontal at the bottom




Front connection with double hole




Rear horizontal





Rear vertical

Horizontal on top,
vertical at the bottomVertical on top,
horizontal at the bottom

Front connection with double hole




Flange

Flange on top and
horizontal at bottomFlange on bottom and
horizontal at top


Secondary disconnect terminal

The auxiliary and control cables are connected at the manual connectors using the push-in technology of the auxiliary conductor connections of the circuit breaker.

Coding pins on the manual connectors prevent them being inserted in the wrong slots.



Screwless connection (push in)



Screw connection (optional)

For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible

- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
 - Non-automatic circuit breakers with 3 blocks
 - Non-automatic circuit breakers with ready4COM feature with 4 blocks
 - Circuit breakers with ETU600 LSI or LSiG with 4 blocks
 - Circuit breakers with ETU600 LSiG-HiZ with 5 blocks
 - Circuit breakers with ETU300 LSi/LSiG with 4 blocks

For dimension drawings, see Equipment Manual – 3WA1 air circuit breakers www.siemens.com/lowvoltage/manuals (109763061)

1



For the optional communications interface with the COM190 or COM150 communications module, a circuit breaker with the ready4COM feature must be selected as the circuit breaker/non-automatic air circuit breaker. The first COM190 or COM150 communications module must be selected via a Z option. If you want to use a further COM190 or COM150 communications module, this must be ordered separately as an accessory. Both COM190 or COM150 communications modules can be run in parallel.

The up to four further digital input/output modules must be ordered separately as accessories.

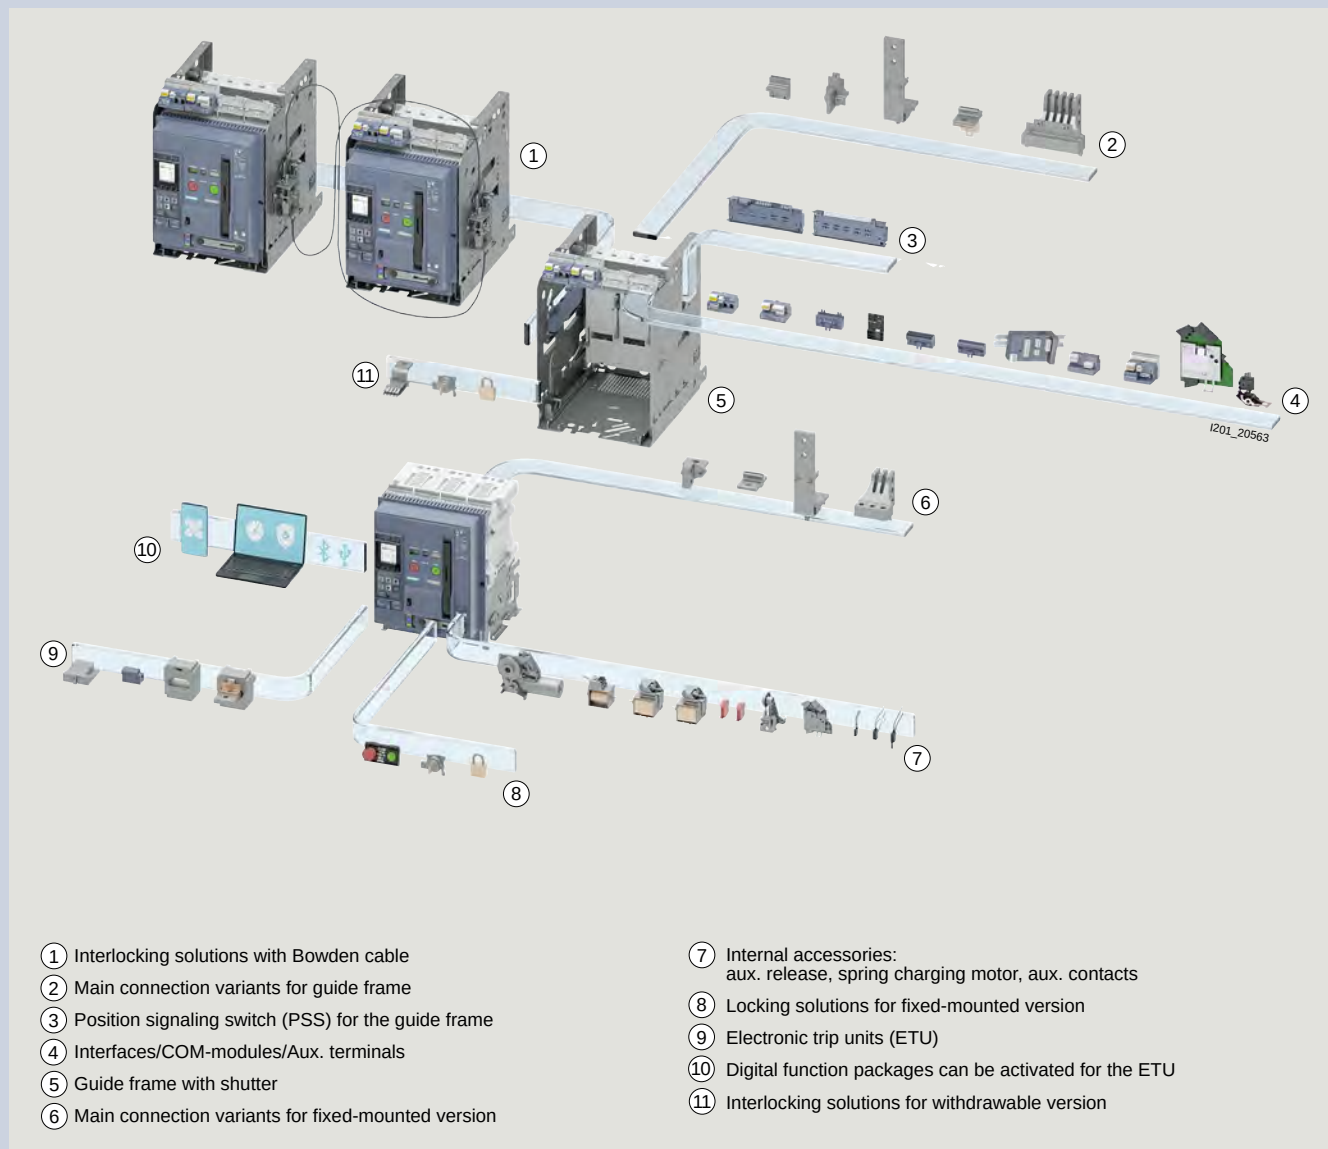
You will find further information on the COM190 in the Equipment Manual – 3WA1 air circuit breakers
www.siemens.com/lowvoltage/manuals (109763061)

3WA11 – 3WA13 system overview

Circuit breakers and non-automatic circuit breakers for AC and DC

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1




Online configurator highlights


www.siemens.com/lowvoltage/3wa-configurator

Graphical display

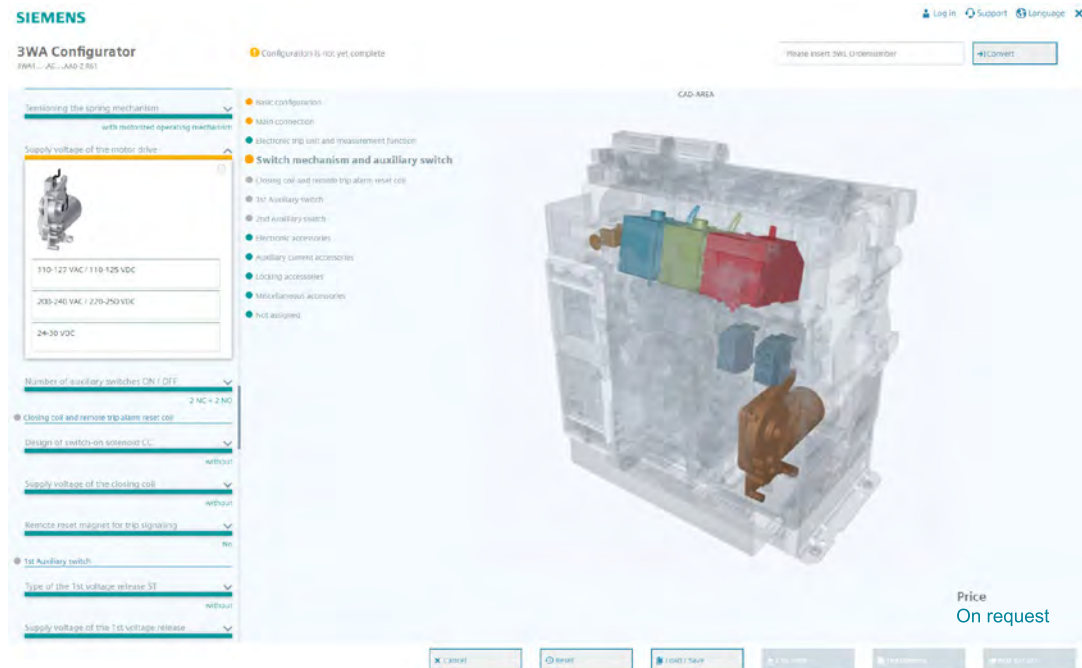
- Integration of the legend as a color system
 - Orange: still to be selected
 - Petrol: already selected
 - Gray: preselected (default)
- Graphical highlighting of the individual configuration steps: "What you see is what you get"



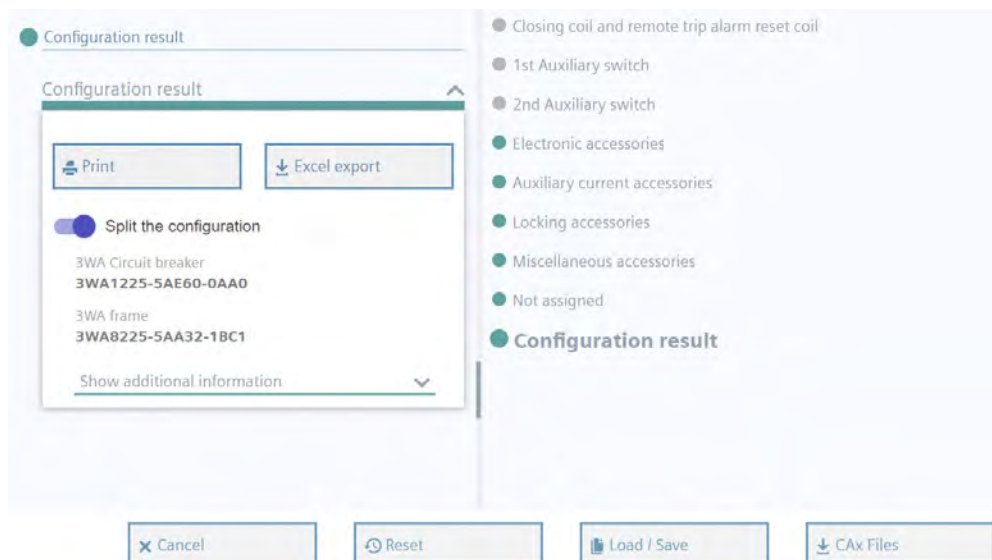Splitting function (Frame and circuit breaker can be ordered separately)



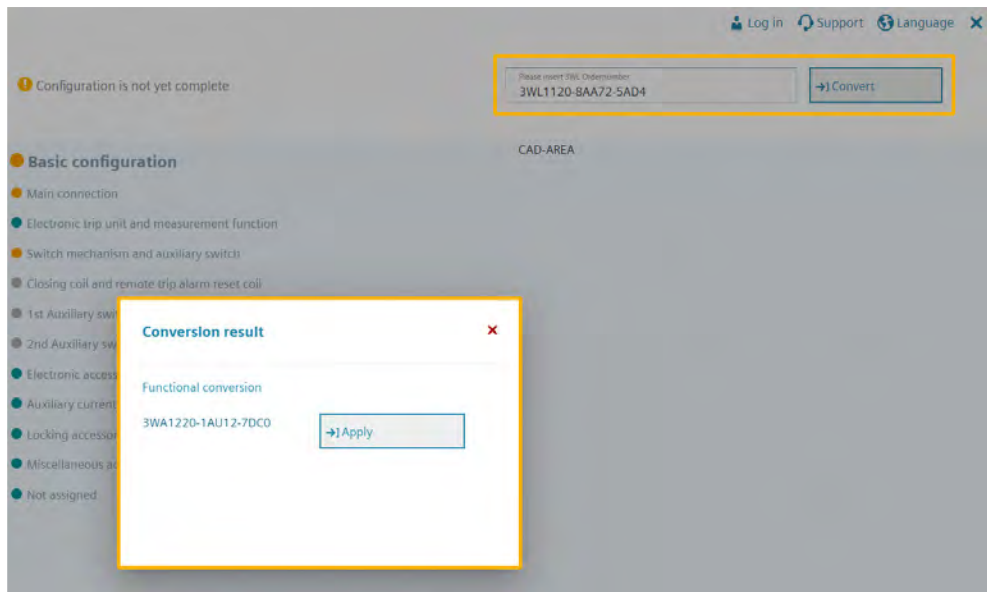Direct conversion of a 3WL article number to a 3WA article number in the configurator



Responsive design (adapted to the differing requirements of the displaying devices)



Dynamic customer price during configuration



Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1			5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers and non-automatic circuit breakers														
Size (SZ)	1		1											
	2		2											
	3		3											
			SZ 1	SZ 2	SZ 3									
Max. rated current	630 A		■	–	–	0	6							
$I_{n\ max}$	800 A		■	–	–	0	8							
	1000 A		■	–	–	1	0							
	1250 A		■	–	–	1	2							
	1600 A		■	–	–	1	6							
	2000 A		■	■	–	2	0							
	2500 A		■	■	–	2	5							
	3200 A		–	■	–	3	2							
	3600 A new		–	■ ¹⁾	–	3	6							
	4000 A		–	■ ¹⁾	■	4	0							
	5000 A		–	–	■	5	0							
	6300 A		–	–	■	6	3							
Short-circuit breaking capacity	N		■	–	–	55/42 kA	2							
I_{cu} at 500/690 V	S		■	■	–	66/50 kA	3							
	M		■	■	–	85/66 kA	4							
	H		■ ³⁾	■	■	100/85 kA	5							
	C		–	■	–	130/100 kA	6							
			–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA	6							
Non-automatic circuit breakers ³⁾								A	A					
Non-automatic circuit breakers, ready4COM ⁴⁾ feature								C	A					
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function	LSI					A	B					
	ETU600 electronic trip unit	Current metering	LSIG					A	C					
	ETU600 electronic trip unit	Current metering, ready4COM ⁴⁾ feature						C						
	ETU600 electronic trip unit with metering function, internal voltage tap in the circuit breaker, power supply of the ETU600 via the VTM680 voltage tap module and ready4COM	PMF-I	Voltage tap on top					L						
		Energy efficiency	Voltage tap on bottom					E						
		PMF-II Basic Power	Voltage tap on top					M						
		Monitoring	Voltage tap on bottom					F						
		PMF-III Advanced	Voltage tap on top					N						
		Power Monitoring	Voltage tap on bottom					G						
	Protective functions			■	■	■	LSI		E					
				■	■	■	LSIG		F					
				–	■	■	LSIG Hi-Z		G					
Number of poles	Fixed-mounted					3-pole	0							
						4-pole, Neutral left	1							
						4-pole, Neutral right new	2							
	Withdrawable					3-pole	3							
		Without position signaling switch				4-pole, Neutral left	4							
						4-pole, Neutral right new	5							
		With position signaling switch ²⁾				3-pole	6							
						4-pole, Neutral left	7							
						4-pole, Neutral right new	8							

¹⁾ Not available for breaking capacity C

²⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

³⁾ Frame size 1 with breaking capacity H is not offered as a non-automatic circuit breaker

⁴⁾ If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM)

3WA1

5

6

7

8

9

10

11

12

13

14

15

16

Connection

Size 1

Short-circuit Breaking capacity	N, S, M	630 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		800 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1250 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1600 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
	H new	630 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		800 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1250 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1600 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–

Size 2

Short-circuit Breaking capacity	S, M, H	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 ^{1) 2)}	2 ²⁾	–	5	6	0	1 ¹⁾	2 ²⁾	–	–	5	6	–	–
	C	2000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		3200 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8

Size 3

Short-circuit Breaking capacity	H	4000 A	1	2	3	5	6	0	1	2	3	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–
	C	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

¹⁾ The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1.

Dimensionally compatible connections can be ordered with the additional Z option D01.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

3WA1

5

6

7

8

9

10

11

12

13

14

15

16

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3
			4 NO, 4 NC	7
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4
	4 NO, 4 NC	8		
Closing coil and remote trip alarm reset coil ¹⁾²⁾	Without closing coil	Without remote trip alarm reset coil		A
	With closing coil (CC/CC-COM) ³⁾ for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	B
			48 ... 60 V DC	C
			110 ... 127 V AC/110 ... 125 V DC	D
			208 ... 240 V AC/220 ... 250 V DC	E
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC/110 ... 125 V DC	H
			208 ... 240 V AC/220 ... 250 V DC	J
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	K
			48 ... 60 V DC	L
			110 ... 127 V AC/110 ... 125 V DC	M
			208 ... 240 V AC/220 ... 250 V DC	N
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	P
			48 ... 60 V DC	Q
			110 ... 127 V AC/110 ... 125 V DC	R
			208 ... 240 V AC/220 ... 250 V DC	S
	2nd auxiliary release	Without 2nd auxiliary release		
With shunt trip (ST), uninterrupted duty 100% OP			24 ... 30 V DC	B
			48 ... 60 V DC	C
			110 ... 127 V AC/110 ... 125 V DC	D
			208 ... 240 V AC/220 ... 250 V DC	E
With shunt trip (ST), momentary duty 5% OP			24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC/110 ... 125 V DC	H
			208 ... 240 V AC/220 ... 250 V DC	J
With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)			24 ... 30 V DC	L
			48 ... 60 V DC	N
			110 ... 127 V AC/110 ... 125 V DC	P
			208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R	
With undervoltage release (UVR-t) ⁴⁾ , adjustable delay 0.2 ... 3.2 s			48 V DC	S
			60 V DC	T
			110 ... 127 V AC/110 ... 125 V DC	U
			208 ... 240 V AC/220 ... 250 V DC	V
	380 ... 415 V AC	W		

¹⁾ Remote trip alarm reset coil is not available for non-automatic circuit breakers

²⁾ When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.

³⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

⁴⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

3WA1

5	6	7	8	–	9	10	11	12	–	13	14	15	16
---	---	---	---	---	---	----	----	----	---	----	----	----	----

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		0
	With shunt trip (ST/ST-COM) ¹⁾ , uninterrupted duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC/110 ... 125 V DC	3
		208 ... 240 V AC/220 ... 250 V DC	4
			5
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	6
		48 ... 60 V DC	7
		110 ... 127 V AC/110 ... 125 V DC	8
		208 ... 240 V AC/220 ... 250 V DC	

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1			5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers and non-automatic circuit breakers														
Size (SZ)	1		1											
	2		2											
	3		3											
		SZ 1	SZ 2	SZ 3										
Max. rated current $I_{n \max}$	630 A	■	–	–	0	6								
	800 A	■	–	–	0	8								
	1000 A	■	–	–	1	0								
	1250 A	■	–	–	1	2								
	1600 A	■	–	–	1	6								
	2000 A	■	■	–	2	0								
	2500 A	■	■	–	2	5								
	3200 A	–	■	–	3	2								
	3600 A new	–	■ ¹⁾	–	3	6								
	4000 A	–	■	■	4	0								
	5000 A	–	–	■	5	0								
	6300 A	–	–	■	6	3								
Short-circuit breaking capacity I_{cu} at 690 V/ 690 V IT network/ 1000 V	E	■	–	–	85/50/50 kA	8								
		–	■	–	85/50/50 kA	8								
		–	–	■	3-pole: 150/50/125 kA 4-pole: 130/50/125 kA	8								
Non-automatic circuit breakers							A	A						
Non-automatic circuit breakers, ready4COM feature							C	A						
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function	LSI				A	B						
			LSIG				A	C						
	ETU600 electronic trip unit	Current metering					A							
		Current metering, ready4COM ³⁾ feature					C							
	ETU600 electronic trip unit with metering function, internal voltage tap in the circuit breaker, VTM640 voltage tap module and ready4COM	PMF-I	Voltage tap on top				U							
		Energy efficiency	Voltage tap on bottom				Q							
		PMF-II Basic Power	Voltage tap on top				V							
		Monitoring	Voltage tap on bottom				R							
		PMF-III Advanced	Voltage tap on top				W							
		Power Monitoring												
			Voltage tap on bottom				S							
	Protective functions	■	■	■	LSI			E						
		■	■	■	LSIG			F						
		–	■	■	LSIG Hi-Z			G						
Number of poles	Fixed-mounted				3-pole	0								
					4-pole, Neutral left	1								
					4-pole, Neutral right new	2								
	Withdrawable				3-pole	3								
		Without position signaling switch			4-pole, Neutral left	4								
					4-pole, Neutral right new	5								
		With position signaling switch ²⁾			3-pole	6								
					4-pole, Neutral left	7								
					4-pole, Neutral right new	8								

¹⁾ Not available for breaking capacity C

²⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

³⁾ If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM)

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
			–					–			

Connection

Connection		Fixed-mounted					Withdrawable									
		Vertical	Horizontal	Front double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom	
Size 1																
Short-circuit Breaking capacity	E	630 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		800 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1250 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1600 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
Size 2																
Short-circuit Breaking capacity	E	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A ³⁾	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 ¹⁾	2 ²⁾	–	5	6	0	1 ¹⁾	2 ²⁾	–	–	5	6	–	–
Size 3																
Short-circuit Breaking capacity	E	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

¹⁾ The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1.

Dimensionally compatible connections can be ordered with the additional Z option D01.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Structure of the article numbers




Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

3WA1



Operating mechanisms, auxiliary switches and auxiliary releases

				0	1	2	5	6	3	7	4	8	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S
Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC																										
			4 NO, 4 NC																										
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC																										
		48 ... 60 V DC	4 NO, 4 NC																										
			4 NO, 4 NC																										
		110 ... 127 V AC/110 ... 125 V DC	2 NO, 2 NC																										
		208 ... 240 V AC/220 ... 250 V DC	4 NO, 4 NC																										
			2 NO, 2 NC																										
Closing coil and remote trip alarm reset coil ¹⁾	Without closing coil	Without remote trip alarm reset coil	24 ... 30 V DC																										
			48 ... 60 V DC																										
	With closing coil (CC/CC-COM) ²⁾ for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
			24 ... 30 V DC																										
			48 ... 60 V DC																										
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC																										
			48 ... 60 V DC																										
			110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC																										
			48 ... 60 V DC																										
			110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
2nd auxiliary release	Without 2nd auxiliary release	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC																										
			48 ... 60 V DC																										
			110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC																										
			48 ... 60 V DC																										
			110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)		24 ... 30 V DC																										
			48 ... 60 V DC																										
			110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
	With undervoltage release (UVR-t) ³⁾ , adjustable delay 0.2 ... 3.2 s		380 ... 415 V AC																										
			48 V DC																										
			60 V DC																										
			110 ... 127 V AC/110 ... 125 V DC																										
			208 ... 240 V AC/220 ... 250 V DC																										
			380 ... 415 V AC																										
			48 V DC																										
			60 V DC																										

¹⁾ Remote trip alarm reset coil is not available for non-automatic circuit breakers

²⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

³⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		0
	With shunt trip (ST/ST-COM) ¹⁾ , uninterrupted duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC/110 ... 125 V DC	3
		208 ... 240 V AC/220 ... 250 V DC	4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	5
		48 ... 60 V DC	6
		110 ... 127 V AC/110 ... 125 V DC	7
		208 ... 240 V AC/220 ... 250 V DC	8

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1		5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers and non-automatic circuit breakers													
Size (SZ)	2	2											
	3	3											
		SZ 2	SZ 3										
Max. rated current $I_{n \max}$	2000 A	■	–		2	0							
	2500 A	■	–		2	5							
	3200 A	■	–		3	2							
	4000 A	■	■		4	0							
	5000 A	–	■		5	0							
	6300 A	–	■		6	3							
Short-circuit breaking capacity I_{cu} at 690 V/1000 V/1150 V-	E	■	–	85/85/50 kA		8							
		–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA		8							
Non-automatic circuit breakers						A	A						
Non-automatic circuit breakers, ready4COM feature						C	A						
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function		LSI		A	B						
				LSIG		A	C						
	ETU600 electronic trip unit	Current metering				A							
		Current metering, ready4COM ²⁾ feature				C							
	Protective functions	■	■	LSI			E						
		■	■	LSIG			F						
		■	■	LSIG Hi-Z			G						
Number of poles	Fixed-mounted			3-pole			0						
				4-pole, Neutral left			1						
				4-pole, Neutral right new			2						
	Withdrawable	Without position signaling switch		3-pole			3						
				4-pole, Neutral left			4						
				4-pole, Neutral right new			5						
		With position signaling switch ¹⁾		3-pole			6						
				4-pole, Neutral left			7						
				4-pole, Neutral right new			8						

¹⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:

3 × connected position, 2 × test position, 1 × disconnected position;

Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:

1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available".

²⁾ If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM)

3WA1

5

6

7

8

9

10

11

12

13

14

15

16

Connection

Size 2

Short-circuit Breaking capacity	E	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 ¹⁾	2 ²⁾	–	5	6	0	1 ¹⁾	2 ²⁾	–	–	5	6	–	–

Size 3

Short-circuit Breaking capacity	E	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

¹⁾ Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.

With Z option D01, vertical connection can be changed to the connection compatible with 3WL.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

1

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				-				-			

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
		110 ... 127 V AC/	2 NO, 2 NC	3
		110 ... 125 V DC	4 NO, 4 NC	7
		208 ... 240 V AC/	2 NO, 2 NC	4
220 ... 250 V DC	4 NO, 4 NC	8		

Closing coil and remote trip alarm reset coil ¹⁾	Without closing coil	Without remote trip alarm reset coil		A
	With closing coil (CC/CC-COM) ²⁾ for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	B
			48 ... 60 V DC	C
			110 ... 127 V AC/110 ... 125 V DC	D
			208 ... 240 V AC/220 ... 250 V DC	E
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC/110 ... 125 V DC	H
			208 ... 240 V AC/220 ... 250 V DC	J
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	K
			48 ... 60 V DC	L
			110 ... 127 V AC/110 ... 125 V DC	M
			208 ... 240 V AC/220 ... 250 V DC	N
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	P
			48 ... 60 V DC	Q
			110 ... 127 V AC/110 ... 125 V DC	R
208 ... 240 V AC/220 ... 250 V DC			S	

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F
		48 ... 60 V DC	G
		110 ... 127 V AC/110 ... 125 V DC	H
		208 ... 240 V AC/220 ... 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 ... 30 V DC	L
		48 ... 60 V DC	N
		110 ... 127 V AC/110 ... 125 V DC	P
		208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R
	With undervoltage release (UVR-t) ³⁾ , adjustable delay 0.2 ... 3.2 s	48 V DC	S
		60 V DC	T
110 ... 127 V AC/110 ... 125 V DC		U	
208 ... 240 V AC/220 ... 250 V DC		V	
380 ... 415 V AC		W	

³⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

3WA1

5	6	7	8	–	9	10	11	12	–	13	14	15	16
---	---	---	---	---	---	----	----	----	---	----	----	----	----

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release	0
	With shunt trip	24 ... 30 V DC
	(ST/ST-COM) ¹⁾ ,	48 ... 60 V DC
	uninterrupted duty 100% OP	110 ... 127 V AC/110 ... 125 V DC
		208 ... 240 V AC/220 ... 250 V DC
	With shunt trip (ST),	24 ... 30 V DC
	momentary duty 5% OP	48 ... 60 V DC
		110 ... 127 V AC/110 ... 125 V DC
		208 ... 240 V AC/220 ... 250 V DC

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Structure of the article numbers



Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1			5	6	7	8	9	10	11	12	13	14	15	16
Non-automatic circuit breakers														
Size (SZ)	2		2											
		BG 2												
Max. rated current $I_{n \max}$	1000 A	■		1	0									
	2000 A	■		2	0									
	4000 A	■		4	0									
Short-circuit breaking capacity I_{cc}	D	■	25 kA, 600 V DC			1								
	E	■	20 kA, 1000 V DC 20 kA, 1500 V DC ¹⁾			8								
Non-automatic circuit breakers								A	U					
Non-automatic circuit breakers, ready4COM feature								C	U					
Number of poles ²⁾	Fixed-mounted					3-pole	0							
						4-pole	1							
	Withdrawable	Without position signaling switch				3-pole	3							
						4-pole	4							
		With position signaling switch ²⁾				3-pole	6							
						4-pole	7							

Connection

Connection			Fixed-mounted					Withdrawable									
			Vertical	Horizontal	Front double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom	
Size 2	Short-circuit Breaking capacity	D	1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
			2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
			4000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
	E	1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8	
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8	
		4000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8	

¹⁾ 1500 V DC only for 4-pole circuit breakers and for breaking capacity E

²⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:

3 × connected position, 2 × test position, 1 × disconnected position;

Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:

1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available"

3WA1

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3
			4 NO, 4 NC	7
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4
		4 NO, 4 NC	8	
Closing coil	Without closing coil			A
	With closing coil (CC/CC-COM) ¹⁾ for uninterrupted duty, 100% OP	24 ... 30 V DC	B	
		48 ... 60 V DC	C	
		110 ... 127 V AC/110 ... 125 V DC	D	
		208 ... 240 V AC/220 ... 250 V DC	E	
	With closing coil (CC) for momentary duty, 5% OP	24 ... 30 V DC	K	
		48 ... 60 V DC	L	
		110 ... 127 V AC/110 ... 125 V DC	M	
208 ... 240 V AC/220 ... 250 V DC		N		
2nd auxiliary release	Without 2nd auxiliary release			A
	With shunt trip (ST), uninterrupted duty 100% OP ¹⁾	24 ... 30 V DC	B	
		48 ... 60 V DC	C	
		110 ... 127 V AC/110 ... 125 V DC	D	
		208 ... 240 V AC/220 ... 250 V DC	E	
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F	
		48 ... 60 V DC	G	
		110 ... 127 V AC/110 ... 125 V DC	H	
		208 ... 240 V AC/220 ... 250 V DC	J	
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 ... 30 V DC	L	
		48 ... 60 V DC	N	
		110 ... 127 V AC/110 ... 125 V DC	P	
		208 ... 240 V AC/220 ... 250 V DC	Q	
		380 ... 415 V AC	R	
	With undervoltage release (UVR-t) ²⁾ , adjustable delay 0.2 ... 3.2 s	48 V DC	S	
		60 V DC	T	
		110 ... 127 V AC/110 ... 125 V DC	U	
		208 ... 240 V AC/220 ... 250 V DC	V	
		380 ... 415 V AC	W	
	1st auxiliary release	Without 1st auxiliary release		
With shunt trip (ST/ST-COM) ¹⁾ , uninterrupted duty 100% OP		24 ... 30 V DC	1	
		48 ... 60 V DC	2	
		110 ... 127 V AC/110 ... 125 V DC	3	
		208 ... 240 V AC/220 ... 250 V DC	4	
With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC	5	
		48 ... 60 V DC	6	
		110 ... 127 V AC/110 ... 125 V DC	7	
	208 ... 240 V AC/220 ... 250 V DC	8		

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

²⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Option plug for electronic trip unit

- To reduce the rated current of the circuit breaker
 - Only one module is possible per circuit breaker. As standard, the electronic trip unit is equipped with an option plug which is equal to the maximum rated breaker current ($I_{n\max}$).
- The rated current of the selected option plug must be less than $I_{n\max}$.

Option plug	Rated current I_n	SZ 1	SZ 2	SZ 3	
	250 A	■	■	–	B02
	315 A	■	■	–	B03
	400 A	■	■	–	B04
	500 A	■	■	–	B05
	630 A	■	■	–	B06
	800 A	■	■	■	B08
	1000 A	■	■	■	B10
	1250 A	■	■	■	B12
	1600 A	■	■	■	B16
	2000 A	■	■	■	B20
	2500 A	–	■	■	B25
	3200 A	–	■	■	B32
	4000 A	–	–	■	B40
	5000 A	–	–	■	B50

IOM230 digital input/output module ¹⁾

Module with 2 inputs and 3 outputs

A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor; five modules can be operated at the same time. Further modules must be ordered separately as 3WA9111-OEC11, which includes the adapter for mounting on the secondary disconnect terminal system of the circuit breaker and the adapter for external mounting on a DIN rail.

F23

ZSI200 Zone-selective interlocking module ¹⁾

Zone-selective interlocking with ETU600

A module, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor

F20

COM190 communications module ^{1) 2)}

- The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature

PROFINET IO/Modbus TCP ²⁾

A module including 2 Switched Ethernet ports, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-OEC13.

F19

COM150 communications module ¹⁾

- The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature

Modbus RTU

A module with terminal connection and optional internal terminating resistor, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-OEC15.

F15

ready4COM circuit breakers without communication-capable closing coils/shunt trips

Note

If this option is used, remote switching directly via communication is no longer possible.

M71

¹⁾ When ordering this option for a circuit breaker or a non-automatic air circuit breaker of the installation type "withdrawable version without guide frame", this must be used as the order option for the guide frame.

²⁾ For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Automatic reset

- Only possible for circuit breakers with an electronic trip unit

Automatic reset

Automatic reset of the reclosing lockout after ETU tripping; this option is not required when ordering a circuit breaker with a remote trip alarm reset coil RR.

K01

Circuit breakers with a metering function for connection of an external voltage transformer

- The circuit breaker is equipped with a metering function. The scope of measured values is the same as for the PMF metering function. Unlike the metering function with internal voltage tap, this version is not certified according to IEC 61557-12.
- External voltage transformers are required for the function.
- Only possible for circuit breakers of frame sizes 2 and 3 with ETU600 and A or C in position 9 of the article number.

Scope of measured values
Metering function

PMF-I
PMF-II
PMF-III

V61
V62
V63

Special approval according to UL 489b in addition to IEC 60947

DC non-automatic circuit breakers up to 1500 V

Sizes 2, 4-pole, 2000 A with $I_{cc} = 20$ kA

Available for:

3WA1220-8AU12-____
3WA1220-8AU42-____
3WA1220-8AU72-____
3WA1220-8CU12-____
3WA1220-8CU42-____
3WA1220-8CU72-____

U09

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

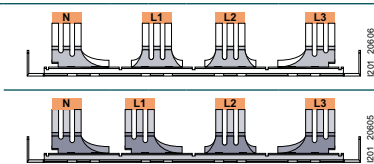
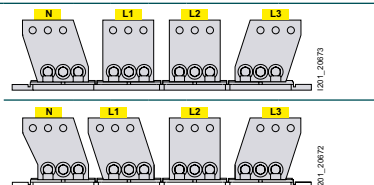
1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Rear main connections (top and bottom) with same pole spacing of phases (only possible for 4-pole circuit breakers with N pole, left)

AC circuit breakers/ AC non-automatic circuit breakers and AC guide frames	Rear vertical		Standard	N – L1 160 mm L1 – L2 130 mm L2 – L3 160 mm	D04
			Option	N – L1 130 mm L1 – L2 160 mm L2 – L3 160 mm	
	Rear horizontal		Standard	N – L1 160 mm L1 – L2 130 mm L2 – L3 160 mm	
			Option	N – L1 130 mm L1 – L2 160 mm L2 – L3 160 mm	

Tinned version of the main circuit connections on the guide frame

- Only for withdrawable circuit breakers with horizontal connection or flange connection
- Cannot be ordered for circuit breakers without a guide frame
- The normal delivery time increases to 15 work days

Tinned connections	Sizes 1, 2, 3	D08
--------------------	---------------	-----

Broadened vertical main circuit connection

- Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately

Main circuit connection	For 3WA1, 4000 A, size 2	Compatible with 3WL1240 for retrofit	D01
-------------------------	--------------------------	--------------------------------------	-----

Circuit breakers without Bluetooth function

Circuit breakers without Bluetooth function	In this version of the circuit breaker, Bluetooth is not provided. Neither can Bluetooth be retrofitted by replacing the electronic trip unit.	D80
---	--	-----

Secondary disconnect terminal system

- Can be ordered for circuit breakers with guide frames and for guide frames

Manual connector with screw terminal	With screw connection instead of push-in connection (standard)	N03
Manual connector for ring lugs	With screw connection for ring lugs instead of push-in connection (standard)	N05

Mechanical operating cycles counters

Mechanical operating cycles counter, 5-digit	Can be used with all circuit breakers and non-automatic circuit breakers including those without a spring charging motor	C01
--	--	-----

Signaling switches

Trip alarm switch	2nd trip alarm switch (S25) 1st trip alarm switch included as standard for circuit breakers. Can only be used with circuit breakers with an electronic trip unit without ready4COM.	1 NO	K06
-------------------	---	------	-----

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Pushbuttons/disconnect switches/closing lockouts/special packaging/arc chute cover

Emergency OPEN button	Mushroom pushbutton instead of the mechanical OFF pushbutton	C25
Local electric close on operator panel (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Only possible in combination with a closing coil (CC)	With sealing cap C11
		With CES lock C12
Motor disconnect switch on operator panel (S12)	This prevents automatic charging of the stored energy mechanism by the spring charging motor	C24
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)		P61
Arc chute cover mounted on the guide frame	Not available for: – Fixed-mounted – Breaking capacity C, E and D – 3600/4000 A size 2	R10
Cover for electronic trip unit	Top cover with safety lock (The lower sealable cover of the rotary coding switch is included in the scope of supply of the circuit breaker)	F40

Internal current sensors without energy core for applications with frequency converters

- Used in converter applications with high harmonic components; can only be used for circuit breakers with an ETU600 electronic trip unit
 - External 24 V DC supply required
 - Instantaneous undervoltage release UVR required (15th position in article number: L, N, P, Q, R)
 - Not possible with delayed undervoltage release UVR-t (15th position in article number: S, T, U, V, W)
 - Additionally contains a relay for monitoring the 24 V DC and warning labels
 - If Z option = K60 is provided, an optional PMF-I to PMF-III metering function is feasible. The accuracy of this metering function is in accordance with the manufacturer's specifications. A certificate according to IEC 61557-12 cannot be provided for this version.

Internal current sensors	Sizes 1, 2, 3	K60
--------------------------	---------------	-----

Mechanical interlocks

- Interlocking module with Bowden cable 2 m

Mechanical interlocks	For fixed-mounted breakers	S55
	For withdrawable circuit breakers with guide frame ¹⁾	R55
	For guide frames (ordered separately)	R56
	For withdrawable circuit breakers (ordered separately)	R57

Locking provisions (for fixed-mounted and withdrawable circuit breakers)

Locking provisions	Against unauthorized closing from the operator panel of the circuit breaker. The disconnect unit fulfills the requirements for main circuit breakers according to EN 60204-1	Made by CES	S01
		Made by IKON	S03
		Assembly kit FORTRESS or CASTELL ²⁾	S05
		Assembly kit for padlocks ³⁾	S07
		Made by RONIS	S08
		Made by PROFALUX	S09
Locking provisions	For charging handle with padlock ³⁾		S33

Locking provisions (for withdrawable circuit breaker)

Locking provision to prevent movement of the withdrawable circuit breaker	Safety lock for mounting onto the circuit breaker	Made by CES	S71
		Made by PROFALUX	S75
		Made by RONIS	S76

¹⁾ Not available in combination with R40

²⁾ Locks must be ordered from the manufacturer.

³⁾ Padlock not included in the scope of supply.

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Locking provisions against unauthorized closing, for withdrawable circuit breakers

- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced.
- Not possible in combination with order code "R81", "R85" or "R86".
- Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately

Made by CES

R61

Made by RONIS

R68

Made by PROFALUX

R60

Locking mechanisms

- R30 and R50 not possible in combination with order code "R81", "R85" or "R86".
- R30 and R50 only possible on complete order for a circuit breaker with a guide frame or when ordering the guide frame separately
- R40 can only be ordered with the circuit breaker

For fixed-mounted circuit breakers

To prevent opening of the control cabinet door in ON position

S30

For withdrawable circuit breakers

To prevent opening of the control cabinet door in connected position

R30

To prevent activation when the control cabinet door is open ¹⁾

R40

To prevent movement when the control cabinet door is open ²⁾

R50

Locking provisions to prevent movement of the withdrawable circuit breaker in disconnected position

- Consisting of Bowden cable and lock in the control cabinet door
- Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60"
- Only possible for a complete order for a circuit breaker with a guide frame or when ordering the guide frame separately

Made by CES

R81

Made by PROFALUX

R85

Made by RONIS

R86

Increased degree of protection for installation in a control cabinet

Door sealing frame for degree of protection IP41

T40

¹⁾ Not available in combination with R50 and R55

²⁾ Not available in combination with R40

Accessory options

Further technical specifications

Manual operating mechanism

3WA11 – 3WA13

Switching on/charging energy store

Maximum force required to operate the hand lever	≤ 230 N
Required number of strokes on the hand lever	9

Closing coils (CC/CC-COM) ¹⁾

3WA11 – 3WA13

Rated operational voltage

Rated control supply voltage U_s	24 ... 30 V DC
	48 ... 60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC

Primary operating range

Primary operating range (acc. to IEC 60947-2)	75 ... 110% U_s
Extended operating range for battery operation	75 ... 126% U_s
Integrated freewheeling diode	Yes

Operation

Version		100% OP	5% OP
Closing power	AC/DC	60 VA/60 W	300 VA/300 W
Continuous power	AC/DC	8 VA/8 W	–
Minimum command time at 100% U_s		60 ms	60 ms
Maximum command time at 100% U_s		–	2000 ms
Opening time of the circuit breaker at 100% U_s		80 ms	50 ms

Fuse protection of the control circuit at U_s for closing coil

Fuse gG	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A

Fuse protection of the control circuit at U_s for spring charging motor + closing coil ²⁾

Fuse gG	24 ... 30 V DC	8 A	10 A
	48 ... 60 V DC	8 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	4 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	4 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	8 A	10 A
	48 ... 60 V DC	8 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	4 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	4 A	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)

²⁾ With the same control circuit for the closing coil and spring charging motor

Spring charging motor ¹⁾

3WA11 – 3WA13

Rated operational voltage

Rated control supply voltage U_s	24 ... 30 V DC
	48 ... 60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC

Primary operating range

Primary operating range (acc. to IEC 60947-2)	85 ... 110% U_s
Extended operating range for battery operation	85 ... 126% U_s

Operation

Closing power	AC/DC	135 VA/135 W
Continuous power	AC/DC	135 VA/135 W
Charging time at 100% U_s		≤ 10 s

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)

Spring charging motor ¹⁾

3WA11 – 3WA13

Fuse protection of the control circuit at U_s for spring charging motor

Fuse gG	24 ... 30 V DC	6 A
	48 ... 60 V DC	6 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	6 A
	48 ... 60 V DC	6 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)Undervoltage releases UVR and UVR-t ¹⁾

3WA11 – 3WA13

Rated operational voltage

Rated control supply voltage U_s : UVR	24 ... 30 V DC
	48 ... 60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC
	380 ... 415 V AC

Rated control supply voltage U_s : UVR-t ²⁾	48 V DC
	60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC
	380 ... 415 V AC

Operating limits	Operate voltage	$< 7\% U_s$
	Pick-up voltage	85 ... 126% U_s

Integrated freewheeling diode	Yes
-------------------------------	-----

Closing power	AC/DC	60 VA/50 W
---------------	-------	------------

Continuous power	AC/DC	5 VA/5 W
------------------	-------	----------

Break time

$U_s = 0$ with UVR instantaneous	≤ 80 ms
$U_s = 0$ with UVR short-time delayed	≤ 200 ms
$U_s = 0$ with UVR-t delayed	0.2 ... 3.2 s
With UVR-t by disconnection at terminals X5.13 and X5.14 (EMERGENCY-STOP circuit) (quick shutdown) ²⁾	≤ 100 ms (maximum allowable cable length between the terminals)/cable length ≤ 50 m

Fuse protection of the control circuit

Fuse gG	24 ... 30 V DC (UVR)	2 A
	48 ... 60 V DC (UVR)	2 A
	48 V DC (UVR-t)	2 A
	60 V DC (UVR-t)	2 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	2 A
	380 ... 415 V AC	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC (UVR)	4 A
	48 ... 60 V DC (UVR)	4 A
	48 V DC (UVR-t)	4 A
	60 V DC (UVR-t)	4 A
	110 ... 127 V AC/110 ... 125 V DC	4 A
	208 ... 240 V AC/220 ... 250 V DC	6 A
	380 ... 415 V AC	6 A
Automatic circuit breaker with D characteristic	24 ... 30 V DC (UVR)	2 A
	48 ... 60 V DC (UVR)	2 A
	48 V DC (UVR-t)	2 A
	60 V DC (UVR-t)	2 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	4 A
	380 ... 415 V AC	4 A

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)²⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Accessory options

Further technical specifications

Shunt trip (ST/ST-COM/ST2) ¹⁾

3WA11 – 3WA13

Rated operational voltage			
Rated control supply voltage U_s		24 ... 30 V DC	
		48 ... 60 V DC	
		110 ... 127 V AC/110 ... 125 V DC	
		208 ... 240 V AC/220 ... 250 V DC	
Primary operating range			
Primary operating range (acc. to IEC 60947-2)		75 ... 110% U_s	
Extended operating range for battery operation		75 ... 126% U_s	
Integrated freewheeling diode		Yes	No
Operation			
Version		100% OP	5% OP
Closing power AC/DC	24 ... 30 V DC, 48 ... 60 V DC	60 VA/60 W	300 VA/300 W
	110 ... 127 V AC/110 ... 125 V DC		
	208 ... 240 V AC/220 ... 250 V DC		
Continuous power AC/DC		8 VA/8 W	–
Minimum command time at 100% U_s		60 ms	60 ms
Maximum command time at 100% U_s		–	2000 ms
Make time of the circuit breaker at 100% U_s		80 ms	50 ms
Fuse protection of the control circuit			
Fuse gG	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)

Remote trip alarm reset coil for mechanical tripped indicator (F7) ¹⁾

3WA11 – 3WA13

Rated operational voltage		
Rated control supply voltage U_s		24 ... 30 V DC
		48 ... 60 V DC
		110 ... 125 V DC/110 ... 127 V AC
		220 ... 250 V DC/208 ... 240 V AC
Primary operating range		
Primary operating range (acc. to IEC 60947-2)		85 ... 110% U_s
Operation		
Power consumption	AC/DC	60 VA/60 W
Minimum command time at $1 \times U_s$		60 ms
Fuse protection of the control circuit		
Fuse gG	24 ... 30 V DC	2 A
	48 ... 60 V DC	
	110 ... 127 V AC /110 ... 125 V DC	1 A
	208 ... 240 V AC /220 ... 250 V DC	
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A
	48 ... 60 V DC	
	110 ... 127 V AC/110 ... 125 V DC	1 A
	208 ... 240 V AC/220 ... 250 V DC	

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)

Contact position-driven auxiliary switches (S1 bis S8) ¹⁾

3WA11 – 3WA13

Type		NO or NC	
Contact reliability		From 1 mA at 5 V DC	
Rated insulation voltage U_i		660 V DC/660 V AC 50/60 Hz	
Rated impulse withstand voltage U_{imp}		6 kV	

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)

Contact position-driven auxiliary switches (S1 bis S8) ¹⁾**3WA11 – 3WA13**

Breaking capacity			
Rated operational current I_e	DC12	24 V	10 A
		48 V	8 A
		110 V	3.5 A
		220/240 V	1 A
	DC13	24 V	6 A
		48 V	4 A
		110 V	1.2 A
		220/240 V	0.4 A
		440 V	0.2 A
	AC12	≤ 660 V	10 A
	AC15	≤ 230 V	6 A
		400 V	4 A
		500 V	3 A
		690 V	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/106](#)

**Ready-to-close signaling switches (S20)
(acc. to DIN VDE 0630)****3WA11 – 3WA13**

Breaking capacity			
Type	NO contact		
Contact reliability	From 1 mA at 5 V DC ¹⁾		
Rated insulation voltage U_i	250 V DC/250 V AC		
Rated operational current I_e	DC12	24 V	5 A
		60 V	0.4 A
		110/127 V	0.4 A
		220/240 V	0.2 A
	DC13	24 V	2.5 A
		60 V	0.22 A
		110/127 V	0.22 A
		220/240 V	0.1 A
	AC12	≤ 240 V	6 A
	A300 AC	≤ 250 V	6 A
	R300 DC	110 ... 125 V	0.22 A
		220 ... 240 V	0.11 A
	AC15	220 V	5 A
		240 V	4 A

Trip alarm switches (S24, S25)**3WA11 – 3WA12**

Breaking capacity			
1st trip alarm switch S24	Changeover contact		
2nd trip alarm switch S25	NO contact		
Contact reliability	From 1 mA at 5 V DC ¹⁾		
Rated insulation voltage U_i	250 V DC/250 V AC 50/60 Hz		
Rated operational current I_e	DC12	24 V	5 A
		60 V	0.4 A
		110/127 V	0.4 A
		220/240 V	0.2 A
	DC13	24 V	2.5 A
		60 V	0.2 A
		110/127 V	0.2 A
		220/240 V	0.1 A
	AC12	≤ 240 V	6 A
	A300 AC	≤ 250 V	6 A
	R300 DC	110 ... 125 V	0.22 A
		220 ... 240 V	0.11 A
	AC15	220 V	5 A
		240 V	4 A

¹⁾ To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

Accessory options

Further technical specifications

Position signaling switches on guide frame ¹⁾

3WA11 – 3WA13

Type	Changeover contact (not COM)			
Contact reliability from ¹⁾	1 mA at 5 V DC			
Rated insulation voltage U_i	250 V, 50/60 Hz			
Rated impulse withstand voltage U_{imp}	4 kV			
Connection type				
PSS321	Spring-loaded terminal or push-in (depending on version)			
PSS600	Push-in			
PSS111 COM	• COM contacts: Push-in • Other contacts: Spring-loaded terminal or push-in			
PSS400 COM	Push-in			
Conductor cross-section that can be connected by customer				
Spring-type terminals	1 × 0,2 mm ² (AWG 28) ... 1 × 2,5 mm ² (AWG 14)			
Push-in solid	1 × 0,5 mm ² (AWG 20) ... 1 × 2,5 mm ² (AWG 14)			
Push-in finely stranded with end sleeve	1 × 0,5 mm ² (AWG 20) ... 1 × 1,5 mm ² (AWG 16)			
Breaking capacity				
Rated operational current I_e	Utilization category according to IEC 60947-5	DC12	24 V	5 A
			60 V	0.4 A
			127 V	0.4 A
			220/240 V	0.2 A
		DC13	24 V	2.5 A
			60 V	0.22 A
			127 V	0.22 A
			250 V	0.2 A
		AC12	≤ 240 V AC	6 A
			AC15	250 V
			220 V	5 A

The COM (X89) contacts may only be connected to the communications module.

¹⁾ To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

ETU600

3WA11 – 3WA13

Power supply			
Method of power supply			Power supply unit DC
DC power supply unit			IEC 61558 SELV/PELV
Rated control supply voltage U_s	DC		24 V
Primary operating range			$U_s \pm 20\%$
Power consumption			2.9 W
Max. current consumption			0.12 A
Max. starting current			0.35 A
Overvoltage category			CAT I
Integrated short-circuit protection			Yes
Protected against polarity reversal			Yes

Summary of power consumption data

Composants	Voltage	Power consumption
ETU600	24 V DC	2.9 W
Closing coil CC/CC-COM 100% OP	24 ... 30 V DC	60 W
	48 ... 60 V DC	60 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/60 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/60 W
Closing coil CC/CC-COM 5% OP	24 ... 30 V DC	300 W
	48 ... 60 V DC	300 W
	110 ... 127 V AC/110 ... 125 V DC	300 VA/300 W
	208 ... 240 V AC/220 ... 250 V DC	300 VA/300 W
Shunt trip ST/ST-COM 100% OP	24 ... 30 V DC	60 W
	48 ... 60 V DC	60 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/60 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/60 W
Shunt trip ST/ST-COM 5% OP	24 ... 30 V DC	300 W
	48 ... 60 V DC	300 W
	110 ... 127 V AC/110 ... 125 V DC	300 VA/300 W
	208 ... 240 V AC/220 ... 250 V DC	300 VA/300 W
Spring charging motors	24 ... 30 V DC	135 W
	48 ... 60 V DC	135 W
	110 ... 127 V AC/110 ... 125 V DC	135 VA/135 W
	208 ... 240 V AC/220 ... 250 V DC	135 VA/135 W
Remote trip alarm reset coils	24 ... 30 V DC	60 W
	48 ... 60 V DC	60 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/60 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/60 W
Undervoltage releases (UVR/UVR-t)	24 V DC	50 W
	30 V DC	50 W
	48 V DC	50 W
	60 V DC	50 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/50 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/50 W
	380 ... 415 V AC	60 VA
IOM230	24 V DC	1.25 W
IOM350	24 V DC	1.25 W
COM190/COM150	24 V DC	1.7 W

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

		5	6	7	8	9	10	11	12	13	14	15	16
3WA8					–	A	A			–			
Guide frames													
Size	1	1											
	2	2											
	3	3											
		SZ 1	SZ 2	SZ 3									
Max. rated current $I_{n \max}$ (Generate the selection of positions 6, 7 and 8 according to the list below)	630 ... 1000 A	■	–	–	1	0							
	1250 ... 1600 A	■	–	–	1	6							
	2000 A	■	■	–	2	0							
	2500 A	■	■	–	2	5							
	2000 ... 3200 A	–	■	–	3	2							
	4000 A	–	■	■	4	0							
	4000 ... 5000 A	–	–	■	5	0							
	6300 A	–	–	■	6	3							
Short-circuit breaking capacity I_{cu} (Generate the selection of positions 6, 7 and 8 according to the list below)	At 500/690 V	N	■	–	–	55/42 kA		2					
		S	■	■	–	66/50 kA		3					
		M	■	■	–	85/66 kA		4					
		H	■	■	■	100/85 kA		5					
		C	–	■	–	130/100 kA		6					
		–	–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA		8					
	At 690/1000/1150 V	E	■	–	–	80/50 kA/–		8					
		–	■	–	–	85/85/50 kA		8					
		–	–	–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA		8					
Number of poles	3-pole							3					
	4-pole, Neutral left							4					

The following combinations of positions 6, 7 and 8 of the article number are technically feasible

Size	Breaking capacity at $I_{n \max}$	630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	5000 A	6300 A
Representation 6, 7, 8												
1	N	10-2	10-2	10-2	16-2	16-2	20-3	25-3	–	–	–	–
	S	10-3	10-3	10-3	16-3	16-3	20-3	25-3	–	–	–	–
	M	20-4	20-4	20-4	20-4	20-4	20-4	25-4	–	–	–	–
	H	20-5	20-5	20-5	20-5	20-5	20-5	25-5	–	–	–	–
	E	20-8	20-8	20-8	20-8	20-8	20-8	25-8	–	–	–	–
2	S	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	M	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	H	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	E	–	–	–	–	–	20-8	25-8	32-8	40-8	–	–
	C	–	–	–	–	–	32-6	32-6	32-6	–	–	–
3	H	–	–	–	–	–	–	–	–	40-5	50-5	63-5
	E	–	–	–	–	–	–	–	–	50-8	50-8	63-8
	C	–	–	–	–	–	–	–	–	50-8	50-8	63-8

3WA8

5

6

7

8

9

10

11

12

13

14

15

16

Connection

Withdrawable

Vertical	Horizontal	Front double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
----------	------------	-------------------	--------	--	--	--	--

Size 1

Short-circuit Breaking capacity	N, S, M, E	630 A	1	2	3	4	5	6	7	8
		800 A	1	2	3	4	5	6	7	8
		1000 A	1	2	3	4	5	6	7	8
		1250 A	1	2	3	4	5	6	7	8
		1600 A	1	2	3	4	5	6	7	8
		2000 A	1	2	3	4	5	6	7	8
		2500 A	1	–	–	–	–	–	–	–
	H	630 A	1	2	–	4	5	6	7	8
		800 A	1	2	–	4	5	6	7	8
		1000 A	1	2	–	4	5	6	7	8
		1250 A	1	2	–	4	5	6	7	8
		1600 A	1	2	–	4	5	6	7	8
		2000 A	1	2	–	4	5	6	7	8
		2500 A	1	–	–	–	–	–	–	–

Size 2

Short-circuit Breaking capacity	S, M, H, E	2000 A	1	2	3	4	5	6	7	8
		2500 A	1	2	3	4	5	6	7	8
		3200 A	1	2	3	4	5	6	7	8
		3600 A	–	–	–	4	–	–	–	–
		4000 A	1 ¹⁾	2 ²⁾	–	–	5	6	–	–
	C	2000 A	1	2	–	4	5	6	7	8
		2500 A	1	2	–	4	5	6	7	7
		3200 A	1	2	–	4	5	6	7	7

Size 3

Short-circuit Breaking capacity	H	4000 A	1	2	3	4	5	6	–	–
		5000 A	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	–	–	–
	E, C ³⁾	4000 A	1	2	–	4	5	6	–	–
		5000 A	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	–	–	–

¹⁾ The 4000 A vertical connections for the 3WA1 have different dimensions from the 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

³⁾ 130 kA for 4-pole circuit breakers

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

		5	6	7	8	–	9	10	11	12	–	13	14	15	16
							A	A				1			1
Push-in connection ¹⁾	SZ 1, SZ 2, SZ 3	X7, X6, X5		Non-automatic circuit breakers without ready4COM feature		A									
		X8, X7, X6, X5		Circuit breakers/non-automatic circuit breakers with ready4COM feature		B									
	SZ 2, SZ 3	X9, X8, X7, X6, X5		Including external trip controller ETC600 for circuit breakers with ETU600 LSIG Hi-Z		K									
Position signaling switch	Without position signaling switch													A	
	Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)													C	
	Position signaling switch PSS-COM (1 × connected position, 1 × test position, 1 × disconnected position) plus connection to a communications module													G	

¹⁾ Conversion to screw connection is possible with Z option N03.

Guide frames for DC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

		5	6	7	8	9	10	11	12	13	14	15	16
3WA8					–	A	U			–	1		1
Guide frames													
Size (SZ)	2	2											
Max. rated current $I_{n \max}$	2000 A		2	0									
	4000 A		4	0									
Short-circuit breaking capacity	D	≤ 600 V DC	25 kA at 600 V DC		1								
	E	≤ 1000 V DC	20 kA at 1000 V DC		8								
		≤ 1500 V DC	20 kA at 1500 V DC ¹⁾		8								
Number of poles	3-pole							3					
	4-pole							4					
Connection	Withdrawable	Vertical						1					
		Horizontal						2					
		Front double hole						3					
		Flange						4					
		Vertical on top/horizontal at the bottom						5					
		Horizontal on top/vertical at the bottom						6					
		Flange on top/horizontal at the bottom						7					
		Horizontal on top/flange at the bottom						8					
Secondary disconnect terminal	Push-in connection	X7, X6, X5		Non-automatic circuit breakers							A		
		X8, X7, X6, X5		Non-automatic circuit breakers with ready4COM							B		
Position signaling switch	Without position signaling switch											A	
	Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)											C	
	Position signaling switch PSS-COM (1 × connected position, 1 × test position, 1 × disconnected position) plus connection to a communications module											G	

¹⁾ 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.

Accessories and spare parts

Accessories for electronic trip unit

Electronic trip unit



- Note:** The electronic trip unit is supplied without an option plug. The option plug must be ordered separately. The range of functions of the ETU600 corresponds to the "Current metering" application package.

Basic protective functions	Article No.
ETU300 LSI/LSIG	3WA9111-OEE32
ETU600 LSI/LSIG	3WA9111-OEE62
ETU600 LSI Hi-Z	3WA9111-OEE63

Spare part battery for ETU600



	Article No.
	3WA9111-OEE81

Option plug



Basic configuration	Rated current I_n	SZ 1	SZ 2	SZ 3	Article No.
Protective function LSI: LT, ST, INST					3WA9111-OEB ..
Protective function LSIG: LT, ST, INST, GF (ground-fault protection GFx with extended setting range)					3WA9111-OEX ..
	250 A	■	■	–	02
	315 A	■	■	–	03
	400 A	■	■	–	04
	500 A	■	■	–	05
	630 A	■	■	–	06
	800 A	■	■	■	08
	1000 A	■	■	■	10
	1250 A	■	■	■	12
	1600 A	■	■	■	16
	2000 A	■	■	■	20
	2500 A	■	■	■	25
	3200 A	–	■	■	32
	4000 A	–	■	■	40
	5000 A	–	–	■	50
	6300 A	–	–	■	63

Function packages for ETU600



Protective and alarm functions	Article No.
Ground fault alarm (GF alarm)	3WA9111-OES01
Directional short-time-delayed short-circuit protection (dST) and reverse power protection (RP) ¹⁾	3WA9111-OES05
Enhanced protective functions (EPF) ¹⁾	Article No.
Full package with unbalance, voltage, active power, frequency, THD and phase sequence detection	3WA9111-OES11
Phase unbalance current and phase unbalance voltage	3WA9111-OES12
Undervoltage and overvoltage	3WA9111-OES13
Active power import and active power export	3WA9111-OES14
Underfrequency and overfrequency	3WA9111-OES15
Total harmonic distortion for current and voltage	3WA9111-OES16
Phase sequence detection	3WA9111-OES17
Functional expansions	Article No.
Second protection parameter set	3WA9111-OES21
Waveform memory	3WA9111-OES24
Extended metering function	Article No.
Upgrade to metering function PMF-II Basic Power Monitoring (metering values, see catalog page 1/25)	3WA9111-OES52
Upgrade to metering function PMF-III Advanced Power Monitoring (metering values, see catalog page 1/25)	3WA9111-OES53

Licenses to activate test function in SENTRON Powerconfig software

Version	Article No.
Standard test license for testing the protective functions of SENTRON circuit breakers. The license is time-limited to 365 days.	7KN2720-OCE00-1YC1
Advanced test license for testing the protective functions and the enhanced protective functions (EPF) of the SENTRON circuit breakers. The license is time-limited to 365 days. new	7KN2720-OCE00-2YC1

¹⁾ Requires an internal voltage tap and a voltage tap module

Accessories for electronic trip unit

Upgrading to ready4COM feature through BSS200 breaker status sensor for ETU600



Version	Article No.
- Gathers information about the statuses of the circuit breaker via signaling switches and transmits it to the CubicleBUS² - Controls the communication-capable CC-COM closing coil and the ST-COM shunt trip in a circuit breaker with the ready4COM feature - The BSS200 breaker status sensor is fitted in every circuit breaker with ETU600 of the ready4COM application package and with the PMF-I to PMF-III metering function	3WA9111-0EC40

External current sensors for the N conductor



Version	Size	Article No.
For mounting on busbar	1	3WA9111-0AA21
	2	3WA9111-0AA22
	3	3WA9111-0AA23
For busbar connection DIN connection	1	3WA9111-0AA31
	2	3WA9111-0AA32
	3	3WA9111-0AA33

Sealable and lockable covers



- The scope of supply includes both the top cover with safety lock and the sealable bottom cover of the rotary coding switches.

Accessory for	Article No.
ETU300	3WA9111-0EM21
ETU600	3WA9111-0EM22



Adapter for connecting the ETU300 to the TD400



Version	Article No.
Via the adapter, the ETU300 can be connected to the TD400 to supply it with an external voltage. There is no parameterization or documentation option via SENTRON Powerconfig	3VW9011-0AT46

Automatic reset of the reclosing lockout



Version	Article No.
Spare part for option K01 or for retrofitting	3WA9111-0EM31

Remote trip alarm reset coils¹⁾



- For mechanical tripped indicator
- Including automatic reset of the reclosing lockout 3WA9111-0EM31


Voltage	Article No.
24 ... 30 V DC	3WA9111-0EM42
48 ... 60 V DC	3WA9111-0EM44
110 ... 127 V AC/110 ... 125 V DC	3WA9111-0EM45
208 ... 240 V AC/220 ... 250 V DC	3WA9111-0EM46

Second tripping solenoid (F6) with reclosing lockout



Version	Article No.
For external control via the external trip controller ETC600, including the necessary parts for the secondary disconnect terminal	3WA9111-0EM61

External trip controller ETC600




Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail	3WA9111-0EM62

¹⁾ Article numbers also apply to 3WL see page 1/111

Accessories and spare parts

Locking provisions and interlocks

Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

Version	Article No.
Without safety lock	3WA9111-0BA21
Made by CES	3WA9111-0BA22
Made by IKON	3WA9111-0BA23

Locking provision against unauthorized closing from the operator panel



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included (S01)	3WA9111-0BA35
Made by IKON	Locks, cylinders and keys included (S03)	3WA9111-0BA36
Assembly kit FORTRESS or CASTELL ¹⁾	Without locks, cylinders or keys (S05)	3WA9111-0BA31
Made by KIRK-Key ¹⁾	Without locks, cylinders or keys (S06)	3WA9111-0BA33
Assembly kit for padlocks	Without padlock (S07)	3WA9111-0BA37
Made by RONIS	Locks, cylinders and keys included (S08)	3WA9111-0BA32
Made by PROFALUX	Locks, cylinders and keys included (S09)	3WA9111-0BA34

Locking provision against unauthorized closing of the withdrawable circuit breaker



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA51
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA53
Made by KIRK-Key ¹⁾	Without locks, cylinders or keys	3WA9111-0BA57
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA58
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA50

Locking provisions for charging handle with padlock



Version	Scope of supply	Article No.
Spare part for S33	Without padlock	3WA9111-0BA71

Locking provision to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA73
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA75
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA76
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA77
Made by KIRK-Key ¹⁾	Without locks, cylinders or keys	3WA9111-0BA80

¹⁾ Locks, cylinders and keys must be ordered from the manufacturer.
 Suitable cylinder lock KIRK Key C 900-301.
 Suitable lock FORTRESS CLIS X005.
 Suitable lock CASTELL FS2.

Locking provisions and interlocks

Interlocking systems



- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WA9111-0BA43

Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position



- Consisting of Bowden cable and the breaker mechanism in the control cabinet door
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the control cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the control cabinet door open" (order code "R50")

Type	Article No.
Made by CES	3WA9111-0BA81
Made by IKON	3WA9111-0BA82
Made by PROFALUX	3WA9111-0BA83
Made by RONIS	3WA9111-0BA84

Locking mechanisms to prevent opening of the control cabinet door when the circuit breaker is closed



- Defeatable
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version		Article No.
Spare part for option S30	Fixed-mounted circuit breaker	3WA9111-0BB12
Spare part for option R30	Guide frames	3WA9111-0BB13

Locking mechanisms to prevent movement when the control cabinet door is open



- Mounted on guide frame
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R50	3WA9111-0BB15

Mechanical interlocks



- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	Circuit breaker and guide frame when ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WA9111-0BB21
Module for withdrawable circuit breakers with guide frame	–	Option R55 ¹⁾	3WA9111-0BB22
Module for guide frame	✓	Option R56	3WA9111-0BB23
Module for withdrawable circuit breaker	✓	Option R57	3WA9111-0BB24
Adapter for size 3 withdrawable circuit breaker	✓	–	3WA9111-0BB25

Coupling on the circuit breaker for mutual interlocking with Bowden cable



- Can be used in all circuit breakers

Article No.
3WA9111-0BB31

Bowden cable for mutual mechanical interlocking



Length	Article No.
2000 mm	3WA9111-0BB41
3000 mm	3WA9111-0BB42
4500 mm	3WA9111-0BB43

¹⁾ Not available in combination with R40

Accessories and spare parts

Indicators and control elements

Ready-to-close signaling switches (S20)



Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH01

1st trip alarm switch (S24)



Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH02

2nd trip alarm switch (S25)



- Can only be used with a circuit breaker with an electronic trip unit without ready4COM
- The 1st trip alarm switch (1 changeover contact) is installed in every circuit breaker with a trip unit as standard

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WA9111-0AH03

Mechanical operating cycles counter (5-digit)



Version	For circuit breakers/non-automatic circuit breakers	Article No.
Spare part for option C01	With manual operating mechanism	3WA9111-0AH04
	With spring charging motor	3WA9111-0AH05

Spring charge signaling switch (S21)



- Standard when a spring charging motor is installed to charge the stored energy mechanism
- When a spring charging motor is retrofitted, the spring charge signaling switch can also be retrofitted

Contacts	Article No.
1 NO	3WA9111-0AH06

Position signaling switch for withdrawable circuit breakers



- All conventional contacts are implemented as changeover contacts.

Contacts	Version	Article No.
PSS321	3 × connected position, 2 × test position, 1 × disconnected position	3WA9111-0AH11
PSS111-COM	1 × connected position, 1 × test position, 1 × disconnected position and option for connection to a communications module COM (Signal: "disconnected position" and "absent")	3WA9111-0AH12
PSS400-COM new	4 × connected position and option for connection to a communications module COM (Signal: "disconnected position" and "absent")	3WA9111-0AH13
PSS600 new	6 × connected position	3WA9111-0AH14
PSS111 new	1 × connected position, 1 × test position, 1 × disconnected position	3WA9111-0AH15

Local electric close (S10) for operator panel



- Scope of supply: Button + wiring
- Not possible with motor disconnect switch
- Note:** Possible only for circuit breakers with closing coil

Version	Article No.
With sealing cap, spare part for option C11	3WA9111-0AH21
With CES assembly kit, spare part for option C12	3WA9111-0AH22
With IKON assembly kit	3WA9111-0AH23

Motor disconnect switch (S12)



- Mounting onto operator panel
- Only in combination with the spring charging motor for charging the stored energy mechanism
- Not available in combination with local electric close

Version	Article No.
Spare part for option C24	3WA9111-0AH24

Emergency OPEN button



- Mushroom pushbutton instead of local mechanical open

Version	Article No.
Spare part for option C25	3WA9111-0AH25

Secondary disconnect terminals for circuit breakers and guide frames

- For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible
- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
 - Non-automatic circuit breakers with 3 blocks
 - Non-automatic circuit breakers with ready4COM feature with 4 blocks
 - Circuit breakers with ETU600 LSI or LSIg with 4 blocks
 - Circuit breakers with ETU600 LSIg-HiZ with 5 blocks

Secondary disconnect terminal			
	Version	Type	Article No.
	Base part ①		3WA9111-0AB01
	1000 V extension ¹⁾		3WA9111-0AB02
	Manual connector ②	Screw connection	3WA9111-0AB03
		Push-in connection	3WA9111-0AB04
		Ring lug connection	3WA9111-0AB05
	Coding kits ③	For secondary disconnect terminal blocks X5 to X9 for fixed-mounted circuit breakers	3WA9111-0AB07
	Sliding contact module ④	For guide frames	3WA9111-0AB08
	Blanking block		3WA9111-0AB12

For a complete secondary disconnect terminal block, you must order:

Fixed-mounted version: ① + ② + ③

Withdrawable version: ① + ④ + ②

¹⁾ Secondary disconnect terminal for circuit breakers with breaking capacity C and E must be ordered separately

Auxiliary releases

Closing coil (CC)/shunt trip (ST) ¹⁾



- Suitable for uninterrupted duty

Version	Voltage	Article No.
100% OP	24 ... 30 V DC	3WA9111-0AD02
Switching time ≤ 80 ms	48 ... 60 V DC	3WA9111-0AD04
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD06

Closing coil (CC-COM)/shunt trip (ST-COM)



- Suitable for uninterrupted duty

Version	Voltage	Article No.
For circuit breakers and non-automatic circuit breakers with the ready4com feature	24 ... 30 V DC	3WA9111-0AD32
100% OP	48 ... 60 V DC	3WA9111-0AD34
Switching time ≤ 80 ms	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD35
Switching time via COM ≤ 120 ms	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD36

¹⁾ Article numbers also apply to 3WL see page 1/116

Accessories and spare parts

Auxiliary release

Closing coils (CC) ¹⁾



- For momentary duty, with cut-off switch S15 (NC)

Version	Voltage	Article No.
5% OP	24 ... 30 V DC	3WA9111-0AD12
Switching time 50 ms	48 ... 60 V DC	3WA9111-0AD14
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD16

Shunt trips (ST) ¹⁾



- For momentary duty, with cut-off switch S14 (NO)

Version	Voltage	Article No.
5% OP	24 ... 30 V DC	3WA9111-0AD22
Switching time 50 ms	48 ... 60 V DC	3WA9111-0AD24
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD25
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD26

Capacitor trip device



- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA, 3WL and 3WN circuit breakers
- Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trips.

Rated control supply voltage/rated operational voltage	Article No.
50/60 Hz AC	DC
208 ... 240 V	220 ... 250 V
	3WA9111-0AD81

Undervoltage release (UVR) ¹⁾



Version	Voltage	Article No.
Instantaneous ≤ 0.08 s (UVR) and short-time delayed ≤ 0.2 s	24 ... 30 V DC	3WA9111-0AE02
	48 ... 60 V DC	3WA9111-0AE04
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE06
	380 ... 415 V AC	3WA9111-0AE07
Delayed (UVR-t) ²⁾ adjustable delay 0.2 ... 3.2 s	48 V DC	3WA9111-0AE13
	60 V DC	3WA9111-0AE14
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE16
	380 ... 415 V AC	3WA9111-0AE17

¹⁾ Article numbers also apply to 3WL see page 1/116

²⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Operating mechanism ¹⁾

Spring charging motor to charge the stored energy mechanism



Voltage	Article No.
24 ... 30 V DC	3WA9111-0AF02
48 ... 60 V DC	3WA9111-0AF04
110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AF05
220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AF06

¹⁾ Article numbers also apply to 3WL see page 1/116

Auxiliary contacts

Auxiliary switches (AUX)



Contacts	Article No.
2 NO + 2 NC	3WA9111-0AG01
2 NO	3WA9111-0AG02
1 NO + 1 NC	3WA9111-0AG03

Door sealing frame, protective cover

Door sealing frame



Version	Article No.
Spare part for option T40	3WA9111-0AP01

Protective covers IP55



- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

Article No.
3WA9111-0AP03

Arc chute, arc chute cover


Arc chute



Voltage	Size	Breaking capacity	Article No.
690 V AC	1	N, S	3WA9111-0AS01
		M	3WA9111-0AS02
	2	S, M, H	3WA9111-0AS10
		C	3WA9111-0AS11
	3	H	3WA9111-0AS17
		C	3WA9111-0AS18
1000 V AC	1	E	For fixed-mounted breakers 3WA9111-0AS04
			For withdrawable circuit breakers 3WA9111-0AS05
	2	E	3WA9111-0AS12
			3WA9111-0AS18
	3	E	3WA9111-0AS18
			3WA9111-0AS14
600 V DC	2	D	3WA9111-0AS13
1000 V DC	2	E	3WA9111-0AS14

Arc chute cover

- Parts kit for guide frame
- Spare part for option R10
- Not available for:
 - Breaking capacity C, D and E
 - 4000 A size 2



Number of poles	Size	Article No.
3-pole	1	3WA9111-0AS31
	2	3WA9111-0AS32
	3	3WA9111-0AS33
4-pole	1	3WA9111-0AS41
	2	3WA9111-0AS42
	3	3WA9111-0AS43

Coding for withdrawable version

Coding for withdrawable version



- Variant coding by the customer with 36 coding options

Size	Article No.
1, 2	3WA9111-0AR11
3	3WA9111-0AR12

Accessories and spare parts

Grounding connection

Grounding connection between the guide frame and the circuit breaker



- Up to 30 kA or 60 kA ground-fault current
- 2 modules must be used for up to 60 kA ground-fault current

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 ¹⁾		3WA9111-0BG01
	3		3WA9111-0BG02
For withdrawable circuit breakers	1	3-pole	3WA9111-0BG11
		4-pole	3WA9111-0BG21
	2	3-pole ¹⁾	3WA9111-0BG12
		4-pole ¹⁾	3WA9111-0BG22
	3	3-pole ²⁾	3WA9111-0BG13
		4-pole ²⁾	3WA9111-0BG23

¹⁾ Cannot be used for size 2 with breaking capacity C and size 2, 4000 A.

²⁾ Not for breaking capacity E

Support bracket

Support bracket



- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WA9111-0BB50

Modules of the CubicleBUS²

COM190 PROFINET IO/Modbus TCP communications module ¹⁾



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **CubicleBUS²** terminating resistor

Article No.
3WA9111-0EC13

COM150 communications module Modbus RTU



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **CubicleBUS²** terminating resistor

Article No.
3WA9111-0EC15

IOM230 digital input/output module (2 inputs and 3 outputs)



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for **CubicleBUS²**

- Type of output contact: NO
- Maximum uninterrupted current of an output at 110 ... 230 V AC: 0.2 A

Article No.
3WA9111-0EC11

IOM350 digital input/output module (3 inputs and 5 outputs)



Version

For mounting on DIN rail, including connecting cables and terminating resistor for **CubicleBUS²**

- Type of output contact: CO
- Maximum uninterrupted current of an output at 110 ... 230 V AC: 10 A

Article No.
3WA9111-0EC12

Terminating resistor for CubicleBUS²



Version

For **CubicleBUS²** on the last module

Article No.
3WA9111-0EC50

Adapters



Version

For mounting the modules of the **CubicleBUS²** on the secondary disconnect terminal system of the circuit breaker

For mounting the modules of the **CubicleBUS²** on DIN rail

Article No.
3WA9111-0EC60

3WA9111-0EC61

ZSI200 Zone-selective interlocking module



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for **CubicleBUS²**

Article No.
3WA9111-0EC10

¹⁾ For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.


Internal voltage tap

Set of components for conversion of an existing internal voltage tap on the main conducting paths



Conversion	Circuit breaker	Size	Article No.
From bottom to top	3-pole	1	3WA9111-0EK11
		2	3WA9111-0EK12
		3	3WA9111-0EK13
	4-pole	1	3WA9111-0EK21
		2	3WA9111-0EK22
		3	3WA9111-0EK23
From top to bottom	3-pole	1	3WA9111-0EK31
		2	3WA9111-0EK32
		3	3WA9111-0EK33
	4-pole	1	3WA9111-0EK41
		2	3WA9111-0EK42
		3	3WA9111-0EK43

Retrofit of the internal voltage tap on the lower main conducting paths



For breaking capacity	Set for circuit breaker	Size	Article No.
N, S, M, H, C with VTM680 voltage tap module, with power supply of ETU600	3-pole	1	3WA9111-0EK51
		2	3WA9111-0EK52
		3	3WA9111-0EK53
	4-pole	1	3WA9111-0EK61
		2	3WA9111-0EK62
		3	3WA9111-0EK63
E with VTM640 voltage tap module	3-pole	1	3WA9111-0EK55
		2	3WA9111-0EK56
		3	3WA9111-0EK57
	4-pole	1	3WA9111-0EK65
		2	3WA9111-0EK66
		3	3WA9111-0EK67

Retrofit kit to connect an external voltage transformer



Size	Article No.
2, 3 including VTM640 voltage tap module and the necessary connection components	3WA9111-0EK81

Voltage tap module



Version	For breaking capacity	Article No.
VTM680, with power supply of ETU600 ¹⁾	N, S, M, H, C	3WA9111-0EM12
VTM640	E	3WA9111-0EM11

¹⁾ When replacing the VTM680 voltage tap module in an 3WA air circuit breaker with an ID number lower than ID No. OE/230101500000, the internal cable harness of the voltage tap must also be replaced. In this case, the accessory "Retrofit of the internal voltage tap on the lower main conducting paths" is required.

Main conductor connections, fixed-mounted versions

Front-accessible main connections according to DIN 43673, double hole for main connection at top



Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AL11
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AL12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC	3WA9111-0AL21
	S, M, H, E 2500 A AC	3WA9111-0AL22
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AL23
	4000 A AC (up to a max. short-circuit current of 100 kA)	3WA9111-0AL31

Front-accessible main connections according to DIN 43673, double hole for main connection at bottom



Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AL13
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AL14
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC	3WA9111-0AL24
	S, M, H, E 2500 A AC	3WA9111-0AL25
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AL26
	4000 A AC (up to a max. short-circuit current of 100 kA)	3WA9111-0AL32

Accessories and spare parts

Main conductor connections, fixed-mounted versions

Rear vertical main connections

Size	Breaking capacity Rated current I_n	Article No.
1	N, S, M, E ≤ 2000 A AC ¹⁾	3WA9111-0AM11
	N, S, M, E 2500 A AC	3WA9111-0AM12
2	S, M, H, C, E ≤ 3200 A AC ²⁾	3WA9111-0AM21
3	H, C, E ≤ 6300 A AC	3WA9111-0AM33

Rear horizontal connection sets ³⁾ new

Size	Breaking capacity Rated current I_n Number of poles	Article No.
2	S, M, H, E 4000 A, 3-pole	3WA9111-0AX28
	S, M, H, E 4000 A, 4-pole	3WA9111-0AX30
	S, M, H, E 4000 A, 4-pole (Spare part for Z option D04)	3WA9111-0AX32

¹⁾ In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WA9111-0AM11 vertical connection is required for each connection, from 1250 A to 2000 A or with breaking capacity M or E two 3WA9111-0AM11 vertical connections are required for each connection.

²⁾ In the case of vertical connection size 2, up to 2500 A one 3WA9111-0AM21 vertical connection is required for each connection for breaking capacity S, M, H, E, D, for 3200 A and always for breaking capacity C, two 3WA9111-0AM21 vertical connections are required for each connection

³⁾ A set contains top and bottom terminals and is approved only as a spare part for circuit breakers with the following article numbers:
3WL1240-3xxx2-xxxx, 3WL1240-4xxx2-xxxx, 3WL1240-5xxx2-xxxx 3WL1240-8xxx2-xxxx

Main conductor connections for withdrawable units

Front-accessible main connections according to DIN 43673, double hole at top or at bottom ¹⁾

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AN11
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AN12
2	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AN21
	S, M, H, E 2500 A AC	3WA9111-0AN22
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AN23
3	H 4000 A AC	3WA9111-0AN31

Supports for front-accessible main connections according to DIN 43673

Number of poles	Size	Article No.
3-pole, set for 3 bars, top or bottom	1	3WA9111-0AN81
	2	3WA9111-0AN82
	3	3WA9111-0AN83
4-pole, set for 4 bars, top or bottom	1	3WA9111-0AN84
	2	3WA9111-0AN85
	3	3WA9111-0AN86

Rear vertical main connections

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AV11
	N, S 1250 ... 2000 A AC	3WA9111-0AV12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC ²⁾	3WA9111-0AV21
	S, M, H, E 2500 A AC ²⁾	3WA9111-0AV22
	S, M, H, E 3200 A AC; D, E 4000 A DC ²⁾	3WA9111-0AV23
3	H, C, E ≤ 5000 A AC	3WA9111-0AV31

Rear horizontal main connections

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AX11
	N, S 1250 ... 2000 A AC	3WA9111-0AX12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC ²⁾	3WA9111-0AX21
	S, M, H, E 2500 A AC ²⁾	3WA9111-0AX22
	S, M, H, E 3200 A AC; D, E 4000 A DC ²⁾	3WA9111-0AX23
3	H, C, E ≤ 5000 A AC	3WA9111-0AX31

Connecting flange

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AW11
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AW12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC	3WA9111-0AW21
	S, M, H, E 2500 A AC	3WA9111-0AW22
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AW23
	C 2000 ... 3200 A new	3WA9111-0AW24
3	H 4000 A AC	3WA9111-0AW31
	C, E AC 4000 A new	3WA9111-0AW32

¹⁾ When using front-accessible main connections (withdrawable circuit breakers) supports are required

²⁾ Not for circuit breakers with very high breaking capacity C

Conversion kit

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers



- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WA circuit breakers with breaking capacity C and breaking capacity E

Number of poles	Size	Article No.
3-pole	1	3WA9111-0BC11
	2	3WA9111-0BC12
	3	3WA9111-0BC13
4-pole	1	3WA9111-0BC14
	2	3WA9111-0BC15
	3	3WA9111-0BC16

Main contact elements

Main contact elements for AC circuit breakers



- **Notes:**
 - To be ordered only once for each circuit breaker
 - On the following circuit breakers, the main contact elements can only be replaced in the factory:
3WA1 size 1 breaking capacity M and E
3WA1 size 2 breaking capacity C
3WA1 size 3 breaking capacity C and E

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	1	N	≤ 1000 A	3WA9111-0AQ01
			1250 A	3WA9111-0AQ02
			1600 A	3WA9111-0AQ04
		S	≤ 1000 A	3WA9111-0AQ03
			1250 ... 1600 A	3WA9111-0AQ04
	2	S, M, H, E	2000 A	3WA9111-0AQ08
			2500 A	3WA9111-0AQ11
			3200 A	3WA9111-0AQ13
			4000 A	3WA9111-0AQ15
	3	H	4000 A	3WA9111-0AQ20
			5000 ... 6300 A	3WA9111-0AQ22
4	1	N	≤ 1000 A	3WA9111-0AQ51
			1250 A	3WA9111-0AQ52
			1600 A	3WA9111-0AQ54
		S	≤ 1000 A	3WA9111-0AQ53
			1250 ... 1600 A	3WA9111-0AQ54
	2	S	2000 A	3WA9111-0AQ58
			2500 A	3WA9111-0AQ61
			3200 A	3WA9111-0AQ63
			4000 A	3WA9111-0AQ65
	3	H	4000 A	3WA9111-0AQ70
			5000 ... 6300 A	3WA9111-0AQ72

Main contact elements for DC non-automatic circuit breakers



- **Note:** To be ordered only once for each circuit breaker

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	2	D, E	1000/2000 A	3WA9111-0AQ17
			4000 A	3WA9111-0AQ18
4	2	D, E	1000/2000 A	3WA9111-0AQ67
			4000 A	3WA9111-0AQ68

Accessories and spare parts

Interfaces

Interface to the IEC 61850

- The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.

Type	Operational voltage	Article No.
SICAM CP-8021 ¹⁾	–	6MF2802-1AA00
SICAM CP-8031 ²⁾	–	6MF2803-1AA00
SICAM CP-8050 ²⁾	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00



¹⁾ Dimensioned for device quantities of max. 1 × 3WA and 1 × 3VA

²⁾ Dimensioned for device quantities of max. 1 × 3WA and 8 × 3VA

³⁾ Dimensioned for device quantities of max. 3 × 3WA and 8 × 3VA or 2 × 3WA and 8 × 3VA and 1 × PAC4200

You will find further information at:

www.siemens.com/sicam-a8000

For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.

The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057)

