

Electrical accessories

Auxiliary switches (AS)



- Signals the contact position of the mounted device
- Version for the switching of small currents and voltages according to EN 61131-2 for control of programmable control systems (PLCs)
- Test button enables the testing of control circuits without the need to switch the mounted device

For combining with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices	ON/OFF switches				
Auxiliary switches (AS)									
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 ¹⁾ , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
Auxiliary switches (AS) with TEST button									
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 ¹⁾ , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2
Auxiliary switches (AS) acc. to UL 489									
5SJ4...-.HG	–	–	–	–	–	1 NO + 1 NC	Standard	0.5 MW	5ST3010-OHG
						2 NO	Standard	0.5 MW	5ST3011-OHG
						2 NC	Standard	0.5 MW	5ST3012-OHG

¹⁾ 5ST3805-1 handle coupler required

Further technical specifications

Further technical specifications		5ST3010, 5ST3011, 5ST3012, 5ST3016	5ST3010-0HG, 5ST3011-0HG, 5ST3012-0HG	5ST3010-2, 5ST3011-2, 5ST3012-2	5ST3013, 5ST3014, 5ST3015, 5ST3013-0XX01 ¹⁾	5ST3013-2, 5ST3014-2, 5ST3015-2
Standards						
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	–	IEC/EN 62019, IEC/EN 60947-5-1		
	UL, CSA	UL 1077, CSA C22.2 No. 235	UL 489, CSA 22.2 No. 5-02	–	UL 1077, CSA C22.2 No. 235	–
Contacts						
Minimum contact load		50 mA, 24 V			1 mA, 5 V DC	5 mA, 5 V DC
Maximum contact load		–			100 mA, 30 V DC	50 mA, 30 V DC
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-12	–				
	230 V AC, AC-13	6 A/6 A			–	
	400 V AC, AC-13	2 A/2 A			–	
	230 V AC, AC-14	6 A/6 A			–	
	400 V AC, AC-14	2 A/2 A			–	
	24 V DC, DC-13	6 A/3 A			–	
	30 V DC, DC-14	–			0.1 A	
	60 V DC, DC-13	3 A/1.5 A			–	
	110 V DC, DC-13	1 A/0.75 A			–	
	220 V DC, DC-12	–				
	220 V DC, DC-13	1 A/0.5 A			–	
Contact load acc. to UL	120 V AC	–	6 A	–		
	125 V AC	3 A	–			
	240 V AC	4 A	–			
	277 V AC	–	3 A	–		
	480 V AC	1.5 A	–			
	60 V DC	–	3 A	–		
	125 V DC	1.1 A	1 A	–		
	250 V DC	0.55 A	–			
Service life, on average, with rated load	Actuations	20000	12000	20000		
Safety						
Short-circuit protection		5SY... 6A miniature circuit breaker or gG 6 A fuse				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)				
Ambient conditions						
Permissible ambient temperature		–40 ... +70 °C				
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²				
Resistance to vibrations at 5 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				

¹⁾ No approvals

Electrical accessories

Fault signal contacts (FC)



- Signals automatic tripping of the circuit protection device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the mounted circuit protection device is tripped manually
- Version with TEST and RESET buttons enables the testing of control circuits without operation of the circuit protection device
- Red RESET button in the operating handle indicates automatic tripping of the mounted circuit protection device

3

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 ¹⁾ , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with TEST and RESET button							
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 ¹⁾ , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2
Fault signal contacts (FC) acc. to UL 489							
5SJ4...-.HG	–	–	–	–	1 NO + 1 NC	0.5 MW	5ST3020-0HG
					2 NO	0.5 MW	5ST3021-0HG
					2 NC	0.5 MW	5ST3022-0HG

¹⁾ 5ST3805-1 handle coupler required

Further technical specifications

			5ST3020, 5ST3021, 5ST3022	5ST3020-2, 5ST3021-2, 5ST3022-2	5ST3020-0HG, 5ST3021-0HG, 5ST3022-0HG
Standards					
Standards	IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235	–	UL 489, CSA 22.2 No. 5-02	
Contacts					
Minimum contact load		50 mA, 24 V			
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A			
	400 V AC, AC-13	6 A/6 A			
	230 V AC, AC-14	2 A/2 A			
	400 V AC, AC-14	2 A/2 A			
	24 V DC, DC-13	6 A/3 A			
	60 V DC, DC-13	3 A/1.5 A			
	110 V DC, DC-13	1 A/0.75 A			
	220 V DC, DC-13	1 A/0.5 A			
Contact load acc. to UL	120 V AC	–			6 A
	125 V AC	3 A	–		
	240 V AC	4 A	–		
	277 V AC	–			3 A
	480 V AC	1.5 A	–		
	60 V DC	–			3 A
	125 V DC	1.1 A	–		1 A
	250 V DC	0.55 A	–		
Service life, on average, with rated load	Actuations	20000			12000
Safety					
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse			
Connections					
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)			
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)			
Ambient conditions					
Permissible ambient temperature		–25 ... +55 °C			
Permissible storage temperature		–40 ... +75 °C			
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles			
Mounting position		Any			
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s ²			
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²			



Auxiliary switches and fault signal contacts (AS+FC)

- Combines the function of both switches in a width of only 0.5 MW (9 mm)
- Signals the contact position of the mounted circuit protection device
- Signals automatic tripping of the circuit protection device in the event of a fault, such as an overload, a short circuit or a fault current
- If the fault signal contact is activated, the contact position does not change if the mounted circuit protection device is tripped manually

For combining with basic units				Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices		
Auxiliary switches and fault signal contacts (AS+FC)						
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 ¹⁾ , 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW
						5ST3062

¹⁾ 5ST3805-1 handle coupler required

Further technical specifications

5ST3062

Standards		
Standards	IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13 400 V AC, AC-14	6 A/6 A 2 A/2 A
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	24 V DC, DC-13 60 V DC, DC-13 110 V DC, DC-13 220 V DC, DC-13	3 A/3 A 3 A/1 A 0.5 A/0.5 A 0.5 A/0.3 A
Contact load acc. to UL	125 V AC 240 V AC 480 V AC 125 V DC 250 V DC	2 A 1.5 A 0.75 A 0.5 A 0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²

Electrical accessories



5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with measuring and communication functions

- Reports the switching state of the mounted standard circuit protection device (ON, tripped, manual OFF, tripped with locked handle)
- Measures the temperature of the device and counts operating cycles, trips and operating hours
- Communication via radio to SENTRON Powercenter 1000 data transceiver
- Plug-in terminals for 24 V DC power supply incl. daisy chain function
- Low space requirements of 0.5 MW (9 mm)

3

For combining with basic units	Miniature circuit breakers	Circuit breakers for equipment	RCCBs	RCBOs	Arc fault detection devices	Communication	Mounting width (1 MW = 18 mm)	Article No.
5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with measuring and communication functions								
5SL, 5SY, 5SP4, 5SP5	5SY17	5SV (16 ... 80 A)	5SU1 ¹⁾ , 5SV1	5SV6		Radio link to SENTRON Powercenter 1000	0.5 MW	5ST3062-0MC

¹⁾ 5ST3805-1 handle coupler required

Note:

Please note the country-specific radio licenses of the products at www.siemens.com/lowvoltage/certificates (109801197)


Further technical specifications

5ST3062-0MC

Standards		
Standards	IEC/EN	60669-2-5
	RED	2014/53/EU
Power supply		
Power supply		24 V DC ±20%, SELV
Conductor cross-sections		0.2 ... 1.5 mm ²
Connection type		Plug-in terminal
Safety		
Degree of pollution for overvoltage category		2/II
Degree of protection		IP40, with front cover
Ambient conditions		
Permissible ambient temperature		–25 ... +60 °C
Permissible storage temperature		–40 ... +85 °C
Humidity		93% at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock		150 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²
Service life/endurance		10000
Communication		
Interface	SENTRON Powercenter 1000	Radio link
Temperature		Measuring accuracy of 2 °C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycles counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring
Operating hours counter		Operating hours with limit monitoring



SENTRON Powercenter 1000/1100 data transceiver

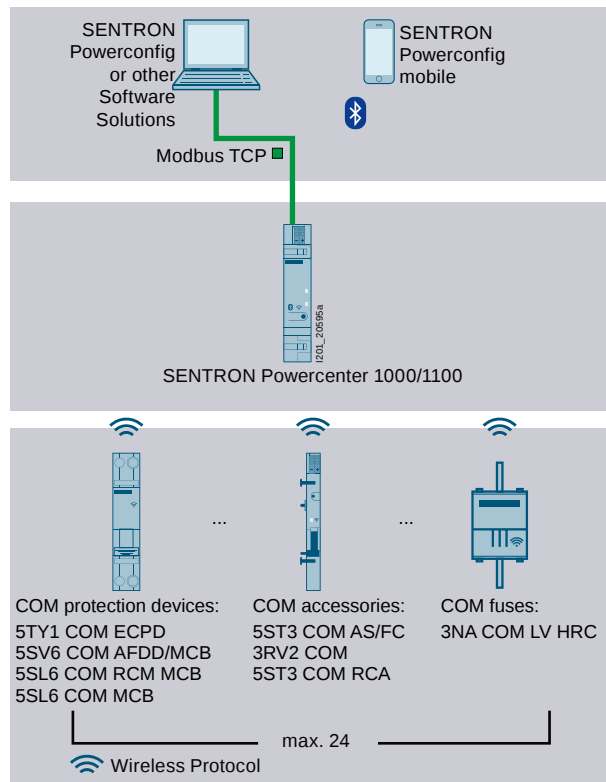

- Wireless radio transmission of measured values and data to the SENTRON Powercenter 1000/1100 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100 data transceiver



SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-OMC00
SENTRON Powercenter 1100	7KN1111-OMC00

See page 10/26

You will find further information at www.siemens.com/lowvoltage/manuals

Installation Manual – Circuit protection devices with communication and measuring function (109791805)

System Manual – Circuit protection devices with communication and measuring function (109791806)



Electrical accessories

Shunt trips (ST)



- For remote-controlled tripping of the mounted device

For combining with basic units			Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBOs			
Shunt trips (ST)					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 ¹⁾	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01
Shunt trips (ST) acc. to UL 489					
5SJ4...-HG	–	–	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030-0HG
			24 ... 60 V AC/DC	1 MW	5ST3031-0HG

¹⁾ 5ST3805-1 handle coupler required

Further technical specifications

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01	5ST3030-0HG	5ST3031-0HG
Standards						
Standards	IEC/EN	EN 60947-1			IEC/EN 60947-1	
	UL, CSA	–			UL 489, UL-File E321559, CSA 22.2 No. 5-02	
Supply						
Primary operating range		0.7 ... 1.1 × U_n				
Rated frequency f_n		50 ... 60 Hz		–	50 ... 60 Hz	
Contacts						
Minimum contact load		50 mA, 24 V		1 mA, 5 V	50 mA, 24 V	
Tripping operations		Max. 2000				
Service life, on average, with rated load	Actuations	20000			12000	
Safety						
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)				
Ambient conditions						
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C	–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²				
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				



Undervoltage releases (UR)

- Are integrated (e.g. in EMERGENCY-OFF loops), thus ensuring that the MCB trips in the event of an emergency. EMERGENCY-OFF is a function provided to disconnect the electricity supply to all or some parts of the installation in case of emergency, when there is a risk of electric shock or any other hazard caused by electrical power
- In addition, an undervoltage release also trips if the voltage is interrupted or too low, or prevents the MCB from closing
- Suitable for use with all devices that can be mounted for implementing EMERGENCY-OFF circuits
- In conjunction with 5SV residual current operated circuit breakers (RCCBs), not suitable for implementing EMERGENCY-STOP circuits

For combining with basic units			Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBOs			
With integrated auxiliary switch					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 ¹⁾	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4, 5SP5	5SV (16 ... 80 A)	5SU1 ¹⁾	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

¹⁾ 5ST3805-1 handle coupler required

Further technical specifications

5ST304.

Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... $1.1 \times U_n$
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)
Ambient conditions		
Permissible ambient temperature		−25 ... +55 °C
Permissible storage temperature		−40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²

Electrical accessories



5ST3 remote control auxiliaries (RCA)

- For locations that are spread out over a wide area or not permanently attended
- Permits direct and immediate access to the installation even if it is remote or in a location that is hard to access
- Permits fast reconnection after a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to IEC/EN 61373/ IEC/EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070
				170 ... 277 V AC, 77 ... 286 V DC	2 MW	5ST3071
With IR test before ARD new	LED	–40 °C ... +70 °C	–	100 ... 240 V AC	2.5 MW	5ST3074

Further technical specifications

Standards									
Standards		IEC/EN 63024 (VDE 0640-21)							
Supply									
Rated frequency f_n		50 ... 60 Hz							
Rated power dissipation in standby		≤ 1 VA						≤ 1.5 VA	
Contacts									
Service life, on average, with rated load		Actuations		10000					
Number of remote switching operations per minute		2						4	
Number of automatic reclose attempts		–		3		–		3	
Cable length in the control circuit		≤ 1500 m						≤ 1500 m (DC)/ ≤ 200 m (AC)	
Sliding selector with locking device		–		■					
Integrated auxiliary switches		–		1CO; 2 A; 250 V				–	
Integrated fault signal contacts		–		1CO; 2 A; 250 V				–	
Connections									
Conductor cross-sections		0.5 ... 1.5 mm ² (AWG 14 ... 30)							
Terminal tightening torque		0.2 ... 0.25 Nm (2.0 lb-in)							
Ambient conditions									
Permissible storage temperature		–40 ... +55 °C				–40 ... +70 °C			
Degree of protection		IP20							
Degree of pollution for overvoltage category		3/II							

Suitable adapters for combination with basic units



Basic units	Mounting width			Article No.
	1 ... 2 MW	3 ... 4 MW	3 ... 6 MW	
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60/5SY17	■	–	–	5ST3820-6
5SP4, 5SP5	■	–	–	5ST3820-1
	–	–	■	5ST3820-2



5ST3 COM remote control auxiliaries (RCA) with communication function **new**

- For locations that are spread out over a wide area or not permanently attended
- Permit access to the installation even if it is remote or in a location that is hard to access
- Remote control via wired contact or communications interface to Powercenter 1000
- Permit fast reconnection after a fault
- With integrated and adjustable reclosing function (ARD)
- Versions with automatic and adjustable RCD/IR test function

Type	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Communication-capable	LED	−40 °C ... +70 °C	Acc. to IEC/EN 61373	100 ... 240 V AC	2 MW	5ST3072-0MC
Communication-capable with RCD/IR test	LED	−40 °C ... +70 °C	Acc. to IEC/EN 61373	100 ... 240 V AC	2.5 MW	5ST3073-0MC

Further technical specifications

5ST3072-0MC, 5ST3073-0MC

Standards			
Standards			IEC/EN 63024
General product approvals			RED2014/53/EU
Basic data			
Rated frequency f_n			50/60 Hz
Service life, on average, with rated load		Actuations	10000
Number of ARD attempts			3 (+3 adjustable)
Contacts			
Conductor cross-sections			0.5 ... 1.5 mm ²
Type of connection			Screw terminals
Ambient conditions			
Permissible storage temperature			−40 ... +70 °C
Communication function			
Interface		SENTRON Powercenter 1000	Wireless
Metering values			Circuit breaker status, temperature, operating cycles, trip counter, operating hours
Switching command			Wired, via communication
Configuration		5ST3072-0MC	Alarms, origin, switching command, ARD times
		5ST3073-0MC	Alarms, origin, switching command, ARD times, test function
Test function			
RCD test			Measurement, tripping current, tripping time
IR measurement		Acc. to IEC/EN 63024	Measurement, insulation resistance
Manual test start			Wired, via communication
Automatic test start			Adjustable time and repeat interval

Suitable adapters for combination with basic units




Basic units	Mounting width			Article No.
	1 ... 2 MW	3 ... 4 MW	3 ... 6 MW	
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60/5SY17	■	–	–	5ST3820-6
5SP4, 5SP5	■	–	–	5ST3820-1
	–	–	■	5ST3820-2

Electrical accessories

5ST3 COM remote control auxiliaries (RCA) with communication function **new**



SENTRON Powercenter 1000/1100 data transceiver

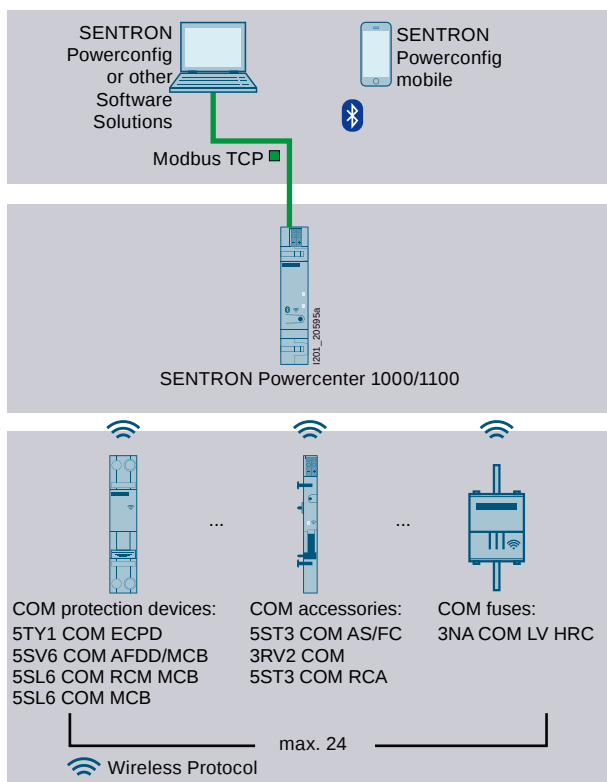

- Wireless radio transmission of measured values and data to the SENTRON Powercenter 1000/1100 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the SENTRON Powercenter 1000/1100 data transceiver



SENTRON Powercenter	Article No.
SENTRON Powercenter 1000	7KN1110-OMC00
SENTRON Powercenter 1100	7KN1111-OMC00

See page 10/26

You will find further information at www.siemens.com/lowvoltage/manuals

Installation Manual – Circuit protection devices with communication and measuring function (109791805)



System Manual – Circuit protection devices with communication and measuring function (109791806)





5SM6 arc fault detection units (AFDD)

- Detects arcing faults
- Offers extremely effective protection against fires started by electrical faults
- Ensures adequate fire protection even in applications without residual current protective device

For combining with basic units			Rated current I_n	Mounting width (1 MW = 18 mm)	Article No.
Width of basic unit	Miniature circuit breakers	RCBOs			
1 MW	5SL60 1P+N (no KL types)	5SV1	Up to 16 A	1 MW	5SM6011-2
			Up to 40 A	1 MW	5SM6014-2
2 MW	5SY ¹⁾ , 5SL4 (1P+N devices only, not compact)	5SU1.5	Up to 16 A	1 MW	5SM6021-2
			Up to 40 A	1 MW	5SM6024-2

¹⁾ Not suitable for use with 5SY5, 5SY8

Further technical specifications

5SM6

Standards		
Standards		IEC/EN 62606
Supply		
Rated voltage U_n		230 V
Rated current I_n		Up to 16/40 A
Rated frequency		50 Hz
Power loss		0.6 W
Contacts		
Number of poles		2-pole
Service life	Average number of operating cycles	> 10000
Safety		
Touch protection	Acc. to EN 50274 (VDE 0660-514)	Finger and back-of-hand safe
Degree of protection	Acc. to EN 60529 (VDE 0470-1)	IP20, with connected conductors
Overvoltage category		III
Tripping in the event of overvoltage		> 275 V
Connections		
Terminal/conductor cross-sections	Solid and stranded	0.75 ... 16 mm ²
	Finely stranded with end sleeve	0.75 ... 10 mm ²
Terminal tightening torque		2.0 ... 2.5 Nm
Mains connection		Bottom
Ambient conditions		
Permissible ambient temperature		−25 ... +40 °C
Permissible storage temperature		−40 ... +75 °C
Resistance to climate at 95% relative humidity	Acc. to IEC 60068-2-30	28 cycles, 55 °C
Degree of pollution		2
CFC and silicone-free		Yes
Mounting position		Any

See suitable busbars, from page 3/64 onwards

See suitable terminals and end caps, from page 3/80 onwards