

Note:

Products with our Siemens EcoTech label are marked in the catalog with this symbol:



See www.siemens.com/sirius/SiemensEcoTech

Price groups

PG 41A, 41B, 41H, 41L

5/2

Introduction**Contactor relays**

- 5/5 SIRIUS 3RH2 contactor relays, 4- and 8-pole
- 5/14 3TH4 contactor relays, 8- and 10-pole
- 5/20 - Accessories for 3TH4 contactor relays
Contactors for railway applications
- 4/62 - SIRIUS 3RH2 contactor relays with extended operating range
- 4/65 - 3TH4 contactor relays, 8-pole

Coupling relays

- 5/21 SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e
- 5/29 SIRIUS 3RQ2 coupling relays with industrial enclosure
- 5/33 SIRIUS 3RQ4 coupling relays, narrow design **NEW**
- 5/42 LZS coupling relays with plug-in relays

3/131

3TG10 power relays/miniature contactors

10/135

SIRIUS 3RS70 signal converters

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Introduction

Overview

More information

Homepage, see www.siemens.com/sirius

SiePortal, see www.siemens.com/product_catalog_siep?3RH_3TH

Topic page, see <https://support.industry.siemens.com/cs/ww/en/view/109800044>

Conversion tool, see www.siemens.com/conversion-tool

The advantages at a glance



Size
Type

S00
3RH21

S00
3RH22

S00
3TH42

S00
3TH43

	Article No.	Page
SIRIUS 3RH2 contactor relays		
4-pole		
• Screw or spring-loaded terminals	3RH21	5/10, 5/11
8-pole	3RH22	5/10, 5/11
4-pole, latched	3RH24	5/10, 5/11
Coupling contactor relays	3RH21	5/12, 5/13
• Coils for control by the PLC		
Contactor relays for railway applications	3RH21	4/64
• Coils with extended voltage range		
3TH4 contactor relays		
8-pole	3TH42	5/17
• Screw terminals		
10-pole	3TH43	5/18
Contactor relays for railway applications	3TH42	4/66
• Coils with extended voltage range		
Accessories for SIRIUS 3RH2 contactor relays		
Auxiliary switches		
• On the front	3RH2911, 3RA2813 ... 3RA2815	from 3/77 onwards, 3/94
• Lateral	3RH2921	3/89
Function modules (direct-on-line starting, star-delta (wye-delta) starting)	3RA2811, 3RA2812, 3RA2816, 3RA2831, 3RA2832	3/98
• On the front		
Surge suppressors	3RT2916	3/95, 3/96
• On the front		
Additional load modules	3RT2916	3/114
• On the front		

Note:

Safety-related characteristics for contactors, see [Standards and approvals, page 16/9](#).

More information

Homepage, see www.siemens.com/sirius-coupling-relays
 SiePortal, see www.siemens.com/product_catalog_siep?3RQ_3RS_LZ
 TIA Selection Tool Cloud (TST Cloud), see www.siemens.com/tstcloud/?node=SIRIUSRelais
 Conversion tool, see www.siemens.com/conversion-tool



Video: Overview of SIRIUS coupling relays

The advantages at a glance

3RQ1



3RQ2



3RQ4



LZS/LZX

Type

	Article No.	Page
SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e		
Coupling relays with force-guided contacts	3RQ1	5/26
<ul style="list-style-type: none"> Widths 17.5 and 22.5 mm Safety certification according to functional safety SIL 3/PL e Can be used as output expansion for SIRIUS 3SK safety relays via device connectors Device versions with protective coating on printed circuit board 		
SIRIUS 3RQ2 coupling relays with industrial enclosure		
Coupling relays with relay output	3RQ2	5/31
<ul style="list-style-type: none"> 1, 2 or 3 changeover contacts with wide voltage range Also available with hard gold-plated contacts 		
SIRIUS 3RQ4 coupling relays, narrow design		
Coupling relays with integrated relay output	3RQ4018 3RQ4038	5/39 5/39
<ul style="list-style-type: none"> Width 6.2 mm, 1 CO, versions with hard gold-plated contacts optionally available <ul style="list-style-type: none"> Output coupling links Input coupling links Device versions with protective coating on printed circuit board ATEX certification Safety Ready (B10d values available) 		
Coupling relays with plug-in relays	3RQ4118, 3RQ4128	5/39
<ul style="list-style-type: none"> Width 6.2 mm, 1 CO, versions with hard gold-plated contacts optionally available <ul style="list-style-type: none"> Output coupling links 		
Coupling relays with integrated semiconductor output	3RQ405. 3RQ4070	5/40 5/40
<ul style="list-style-type: none"> Width 6.2 mm, output 1 semiconductor, triac or transistor <ul style="list-style-type: none"> Output coupling links Input coupling links 		
LZS coupling relays with plug-in relays		
Coupling relays with plug-in relays with 2, 3 and 4 changeover contacts	LZS:PT, LZX:PT	5/45 ... 5/47
<ul style="list-style-type: none"> Switching capacity 12 A/10 A/6 A Width 27 mm Base with or without logical separation 		
Coupling relays with plug-in relays with 1 or 2 changeover contacts	LZS:RT, LZX:RT	5/48 ... 5/50
<ul style="list-style-type: none"> Switching capacity 16 A/8 A Width 15.5 mm Base with or without logical separation 		

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Introduction

Connection methods

The contactor relays and the relays are available with screw terminals (box terminals) or with spring-loaded terminals.

The 3RQ and LZS/LZX coupling relays are supplied with screw terminals or spring-loaded terminals (push-in).

	Screw terminals
	Spring-loaded terminals, spring-loaded terminals (push-in)
	Flat connectors

The connection method is indicated in the corresponding tables by the symbols shown on orange backgrounds.

3RQ coupling relays: Spring-loaded terminals (push-in) with TOP wiring

Push-in terminals are a form of spring-loaded terminals allowing fast wiring without tools for rigid conductors or conductors equipped with end sleeve.

As with other spring-loaded terminals, a screwdriver (with 3.0 x 0.5 mm blade) is required to disconnect the conductor. The same tool can also be used to wire finely-stranded or stranded conductors with no end sleeve.

The advantages of the push-in terminals are found, as with all spring-loaded terminals, in speed of assembly and disassembly and vibration-proof connection. There is no need for the checking and tightening required with screw terminals.

With the TOP wiring method, the wire inlet and terminals can be reached from the front. This helps to speed up the wiring process and eliminate wiring errors.



Video: SIRIUS spring-loaded terminals – Strong, flexible, safe, fast

Ordering notes for multi-unit packaging

On request, 3RQ1 and 3RQ2 coupling relays can also be ordered in practical and environmentally friendly multi-unit packaging.

Multi-unit packaging with order code X90

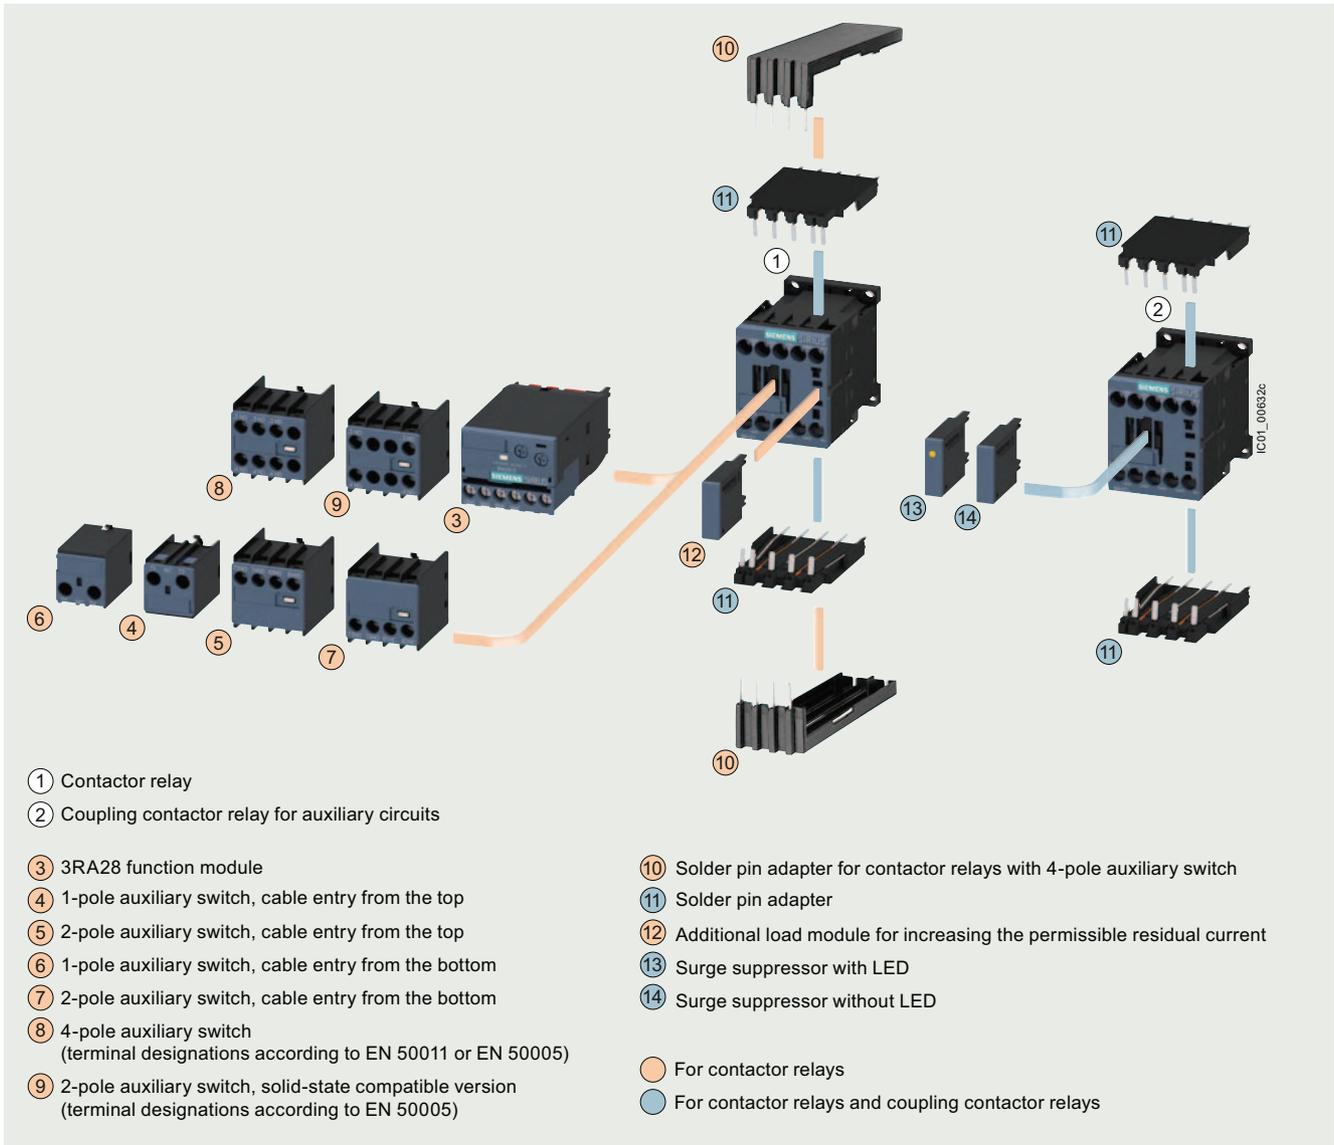
When ordering products in multi-unit packaging, the article number of the product concerned must be supplemented with **"-Z"** and, in addition, the order code **"X90"** must be specified.

Ordering examples:

- 3RQ10 coupling relays with a width of 17.5 mm
3RQ1000-1EB00-Z X90;
Order quantity 16 units → Delivered in one package containing 16 units
- 3RQ20 coupling relays with a width of 22.5 mm
3RQ2000-1AW00-Z X90;
Order quantity 12 units → Delivered in one package containing 12 units

For more information, [see page 16/7](#).

Overview

**Contactor relays,
Size S00 with mountable accessories**

Accessories, see page 3/66 onwards.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

SIRIUS 3RH2 contactor relays, 4- and 8-pole

Standards

IEC 60947-1, IEC 60947-4-1, IEC 60947-5-1

The 3RH2 contactor relays are available with screw or spring-loaded terminals. The basic unit contains four contacts with terminal designations according to EN 50011.

The 3RH21 coupling contactor relays for switching auxiliary circuits are tailored to the special requirements of working with electronic controls.

Contact reliability of auxiliary contacts

High contact reliability at low voltages and currents, suitable for solid-state circuits with currents ≥ 1 mA at a voltage of ≥ 17 V.

Protecting connections against overvoltage

Protection against overvoltage at the control supply voltage connection

RC elements, varistors, diodes or diode assemblies (combination of a diode and a Zener diode) can be plugged onto all 3RH2 contactor relays from the front for damping switching overvoltages in the coil. The plug-in direction is determined by a coding device.

Coupling contactor relays have a low power consumption and an extended solenoid coil operating range.

Depending on the version, the solenoid coils of the coupling contactor relays are supplied either without overvoltage damping (versions 3RH21...-HB40 or 3RH21...-MB40-OKT0) or with a diode or suppressor diode connected as standard.

Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information on how damping influences the time response, see [Equipment Manual](#).

Accessories

The accessories for the 3RT2 contactors in size S00 can also be used for the 3RH2 contactor relays (see [page 3/66 onwards](#)).

Mounting of additional auxiliary switches

Expansion possibilities

All 3RH21 contactor relays (except for coupling contactor relays) can be expanded using auxiliary switches; the permissible configuration must be observed.

For detailed information about fitting of auxiliary switches, see [pages 3/77 to 3/84](#).

The auxiliary switch can easily be snapped onto the front of the contactor relays. The auxiliary switch has a centrally positioned release lever for disassembly.

The conventional front auxiliary contacts fulfill the characteristics of force-guided operation and are therefore suitable for Safety applications.

Contactor relays in safety-related applications

Contactor relays are a significant part of safety-related applications. They are generally the actuators that perform the switching operation leading to the safe disconnection of the corresponding application or system.

Contactor relays with force-guided operation according to IEC 60947-5-1 are generally required for use in safety-related applications. Most of our contactors meet this requirement; a corresponding note can be found in the technical product data sheet.

Contactor relays with increased tamper protection

Increased tamper protection is ensured either by using our contactor relay versions with factory-installed, permanently mounted auxiliary switches (e.g. 3RH22 contactor relays), or by using the 3RT2916-4MA10 sealable cover as an accessory (see [page 3/112](#)).

Article number scheme

Product versions		Article number												
SIRIUS contactor relays		3RH2	<input type="checkbox"/>	0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
Device type	e.g. 1 = 4-pole contactor relay	<input type="checkbox"/>												
Number of NO contacts	e.g. 2 = 2 NO	<input type="checkbox"/>												
Number of NC contacts	e.g. 2 = 2 NC	<input type="checkbox"/>												
Type of electrical connection	Screw terminals					1								
	Spring-loaded terminals					2								
Operating range/solenoid coil circuit	e.g. A = AC standard/without coil circuit					<input type="checkbox"/>								
Rated control supply voltage	e.g. P0 = 50/60 Hz 230 V AC								<input type="checkbox"/>	<input type="checkbox"/>				
Special version												<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Example		3RH2	1	2	2	-	1	A	P	0	0			

Note:

The article number scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

Technical specifications

More information

Technical specifications, see
<https://support.industry.siemens.com/cs/ww/en/ps/16188/td>
 FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/16188/faq>


Manuals, see
<https://support.industry.siemens.com/cs/ww/en/ps/16188/man>

Type
 Size

Contactor relays
3RH2
S00

Permissible mounting position

The contactor relays are designed for operation on a vertical mounting surface.



Upright mounting position



Special version required

Force-guided operation of contacts in contactor relays

3RH2:

Yes, in the basic unit and the auxiliary switch as well as between the basic unit and the mounted auxiliary switch (**removable**) according to:

- ZH1/457
- IEC 60947-5-1, Annex L

3RH22:

Yes, in the basic unit and the auxiliary switch as well as between the basic unit and the mounted auxiliary switch (**permanently mounted**) according to:

- ZH1/457
- IEC 60947-5-1, Annex L

Note:

3RH2911-.NF. solid-state-compatible auxiliary switches have no force-guided contacts.

Explanations:

There is force-guided operation if it is ensured that the NC and NO contacts cannot be closed at the same time.

ZH1/457

Safety Rules for Controls on Power-Operated Metalworking Presses.


IEC 60947-5-1, Annex L

Standard for low-voltage switchgear and controlgear; "Special requirements for mechanically linked (force-guided) contact elements"

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

SIRIUS 3RH2 contactor relays, 4- and 8-pole

Type Size	Contactor relays				
	3RH21 S00	3RH22	3RH24		
General data					
Dimensions (W x H x D)					
<ul style="list-style-type: none"> Basic unit <ul style="list-style-type: none"> Screw terminal Spring-loaded terminal Basic unit with mounted auxiliary switch <ul style="list-style-type: none"> Screw terminal Spring-loaded terminal Basic unit with mounted function module or solid-state time-delay auxiliary switch <ul style="list-style-type: none"> Screw terminal Spring-loaded terminal 		mm	45 x 58 x 73	--	90 x 58 x 73
		mm	45 x 70 x 73	--	
		mm	45 x 58 x 117	--	
		mm	45 x 70 x 121	--	
		mm	45 x 58 x 147	--	
		mm	45 x 70 x 147	--	
Mechanical endurance					
<ul style="list-style-type: none"> Basic units 	Operating cycles	30 million		5 million	
<ul style="list-style-type: none"> Basic unit with mounted auxiliary switch 	Operating cycles	10 million		5 million	
<ul style="list-style-type: none"> Auxiliary switch suitable for electronics 	Operating cycles	5 million			
Rated insulation voltage U_i (pollution degree 3)	V	690			
Rated impulse withstand voltage U_{imp}	kV	6			
Protective separation between coil and contacts in the basic unit, according to IEC 60947-1, Annex N	V	400			
Permissible ambient temperature					
<ul style="list-style-type: none"> During operation 	°C	-25 ... +60			
<ul style="list-style-type: none"> During storage 	°C	-55 ... +80			
Short-circuit protection					
<ul style="list-style-type: none"> Short-circuit test <ul style="list-style-type: none"> With fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1$ kA according to IEC 60947-5-1 With miniature circuit breakers with C characteristic with short-circuit current $I_k = 400$ A according to IEC 60947-5-1 	A	10			
	A	10			

Type Size	Contactor relays		
	3RH21 S00	3RH22	3RH24
Conductor cross-sections			
Auxiliary conductors and coil terminals (1 or 2 conductors can be connected)			
<ul style="list-style-type: none"> Solid or stranded 	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾ , max. 2 x 4	
<ul style="list-style-type: none"> Finely stranded with end sleeve 	mm ²	2 x (0.5 ... 1.5) ¹⁾ ; 2 x (0.75 ... 2.5) ¹⁾	
<ul style="list-style-type: none"> AWG cables, solid or stranded 	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 14) ¹⁾	
<ul style="list-style-type: none"> Terminal screw <ul style="list-style-type: none"> Tightening torque 	Nm	M3 (for Pozidriv size 2, Ø 5 ... 6 mm) 0.8 ... 1.2 (7 ... 10.3 lb.in)	
Auxiliary conductors and coil terminals²⁾ (1 or 2 conductors can be connected)			
<ul style="list-style-type: none"> Operating tool 	mm	3.0 x 0.5; 3.5 x 0.5	
<ul style="list-style-type: none"> Solid or stranded 	mm ²	2 x (0.5 ... 4)	
<ul style="list-style-type: none"> Finely stranded with end sleeve 	mm ²	2 x (0.5 ... 2.5)	
<ul style="list-style-type: none"> Finely stranded without end sleeve 	mm ²	2 x (0.5 ... 2.5)	
<ul style="list-style-type: none"> AWG cables, solid or stranded 	AWG	2 x (20 ... 12)	
Auxiliary conductors for front and laterally mounted auxiliary switches²⁾			
<ul style="list-style-type: none"> Operating tool 	mm	3.0 x 0.5; 3.5 x 0.5	
<ul style="list-style-type: none"> Solid or stranded 	mm ²	2 x (0.5 ... 2.5)	
<ul style="list-style-type: none"> Finely stranded with end sleeve 	mm ²	2 x (0.5 ... 1.5)	
<ul style="list-style-type: none"> Finely stranded without end sleeve 	mm ²	2 x (0.5 ... 2.5)	
<ul style="list-style-type: none"> AWG cables, solid or stranded 	AWG	2 x (20 ... 14)	

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

²⁾ Max. outer diameter of the conductor insulation: 3.6 mm.
On spring-loaded terminals with conductor cross-sections ≤ 1 mm² an insulation stop is recommended, see page 3/115.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

SIRIUS 3RH2 contactor relays, 4- and 8-pole

		Contactor relays	
Type		3RH2	
Size		S00	
Control			
Solenoid coil operating range			
• AC operation	at 50 Hz	0.8 ... 1.1 x U_c	
	at 60 Hz	0.85 ... 1.1 x U_c	
• DC operation	at +50 °C	0.8 ... 1.1 x U_c	
	at +60 °C	0.85 ... 1.1 x U_c	
Power consumption of the solenoid coil (for cold coil and 1.0 x U_c)			
• AC operation, 50 Hz			
- Closing power	VA/p.f.	37/0.8	
- Holding power	VA/p.f.	5.7/0.25	
• AC operation, 60 Hz			
- Closing power	VA/p.f.	33/0.75	
- Holding power	VA/p.f.	4.4/0.25	
• DC operation	W	4.0	
Closing power = holding power			
Permissible residual current of the electronics (with 0 signal)			
• For AC operation ¹⁾		< 4 mA x (230 V/ U_c)	
• For DC operation		< 10 mA x (24 V/ U_c)	
¹⁾ The 3RT2916-1GA00 additional load module is recommended for higher residual currents, see page 3/114.			

		Coupling contactor relays						
Type		3RH21..						
Size		-HB40		-JB40	-KB40	-MB40-0KT0	-VB40	-SB40
		S00						
Control								
Solenoid coil operating range		0.7 ... 1.25 x U_c			0.85 ... 1.85 x U_c			
Power consumption of the solenoid coil (for cold coil and 1.0 x U_c) Closing power = holding power at $U_c = 24$ V		W	2.8			1.6		
Permissible residual current of the electronics with 0 signal		< 10 mA x (24 V/ U_c)			< 8 mA x (24 V/ U_c)			
Overvoltage protection circuit of the solenoid coil		No overvoltage damping 	Integrated diode 	Integrated suppressor diode 	No overvoltage damping 	Integrated diode 	Integrated suppressor diode 	

		Contactor relays	
Type		3RH2	
Size		S00	
Rated data of the auxiliary contacts			
Load rating with AC			
Rated operational currents I_e			
AC-12	A	10	
AC-15			
at rated operational voltage U_e	up to 230 V A	10 ¹⁾	
	400 V A	3	
	500 V A	2	
	690 V A	1	
cULus rated data			
Basic units and auxiliary switches			
• Rated control supply voltage	V AC	max. 600	
• Rated voltage	V AC	600	
• Switching capacity		A 600, Q 600	
• Uninterrupted current at 240 V AC	A	10	

¹⁾ 3RH22, 3RH29: $I_e = 6$ A for AC-15 and DC-13.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

SIRIUS 3RH2 contactor relays, 4- and 8-pole

Selection and ordering data

AC operation 

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41A



3RH2122-1A..0



3RH2122-2A..0



3RH2244-1A..0



3RH2244-2A..0



3RH2422-1A..0

Rated operational current I_{eAC-15} at 230 V	Contacts		Rated control supply voltage U_c at 50/60 Hz ¹⁾	Screw terminals 		Spring-loaded terminals 	
	Ident. No.	Version		Article No.	Price per PU	Article No.	Price per PU
A		 NO  NC	V AC				

For screw and snap-on mounting on TH 35 DIN rail

Size S00

10	40E	4	0	24	3RH2140-1AB00 3RH2140-1AF00 3RH2140-1AP00	3RH2140-2AB00 3RH2140-2AF00 3RH2140-2AP00
				110		
				230		
31E	3	1	24	3RH2131-1AB00 3RH2131-1AF00 3RH2131-1AP00	3RH2131-2AB00 3RH2131-2AF00 3RH2131-2AP00	
			110			
			230			
22E	2	2	24	3RH2122-1AB00 3RH2122-1AF00 3RH2122-1AP00	3RH2122-2AB00 3RH2122-2AF00 3RH2122-2AP00	
			110			
			230			
With permanently mounted auxiliary switch and cover of the contact position indicator						
6	44E	4	4	230	3RH2244-1AP00	3RH2244-2AP00
				230		
62E	6	2	230	3RH2262-1AP00	3RH2262-2AP00	
Latched						
No lateral auxiliary switches can be mounted						
10	40E	4	0	24	3RH2440-1AB00 3RH2440-1AF00 3RH2440-1AP00	---
				110		---
				230		---
31E	3	1	24	3RH2431-1AB00 3RH2431-1AF00 3RH2431-1AP00	---	
			110		---	
			230		---	
22E	2	2	24	3RH2422-1AB00 3RH2422-1AF00 3RH2422-1AP00	---	
			110		---	
			230		---	

¹⁾ Coil operating range
 - at 50 Hz: 0.8 to 1.1 x U_c
 - at 60 Hz: 0.85 to 1.1 x U_c

Other voltages according to page 3/64 on request.

Accessories, see page 3/66 onwards.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

SIRIUS 3RH2 contactor relays, 4- and 8-pole

DC operation 

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41A



Rated operational current I_e /AC-15 at 230 V	Contacts		Rated control supply voltage U_c	Screw terminals 		Spring-loaded terminals 	
	Ident. No.	Version		Article No.	Price per PU	Article No.	Price per PU
		 	V DC				
A							

For screw and snap-on mounting on TH 35 DIN rail

Size S00							
10	40E	4	0	24 110 220	3RH2140-1BB40 3RH2140-1BF40 3RH2140-1BM40	3RH2140-2BB40 3RH2140-2BF40 3RH2140-2BM40	
	31E	3	1	24 110 220	3RH2131-1BB40 3RH2131-1BF40 3RH2131-1BM40	3RH2131-2BB40 3RH2131-2BF40 3RH2131-2BM40	
	22E	2	2	24 110 220	3RH2122-1BB40 3RH2122-1BF40 3RH2122-1BM40	3RH2122-2BB40 3RH2122-2BF40 3RH2122-2BM40	
With integrated coil circuit (diode integrated at factory)							
10	40E	4	0	24	3RH2140-1FB40	3RH2140-2FB40	
	31E	3	1	24	3RH2131-1FB40	3RH2131-2FB40	
	22E	2	2	24	3RH2122-1FB40	3RH2122-2FB40	
With permanently mounted auxiliary switch and cover of the contact position indicator							
6	44E	4	4	24	3RH2244-1BB40	3RH2244-2BB40	
	62E	6	2	24	3RH2262-1BB40	3RH2262-2BB40	
Latched							
No lateral auxiliary switches can be mounted							
10	40E	4	0	24 110 220	3RH2440-1BB40 3RH2440-1BF40 3RH2440-1BM40	-- -- --	
	31E	3	1	24 110 220	3RH2431-1BB40 3RH2431-1BF40 3RH2431-1BM40	-- -- --	
	22E	2	2	24 110 220	3RH2422-1BB40 3RH2422-1BF40 3RH2422-1BM40	-- -- --	

Other voltages according to page 3/64 on request.

Accessories, see page 3/66 onwards.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

3TH4 contactor relays, 8- and 10-pole

Overview

Standards

IEC 60947-1, IEC 60947-5-1

Note:

The 3TH42 and 3TH43 contactor relays feature force-guided operation according to IEC 60947-5-1, Ed. 3.1.

Terminal designations according to EN 50011

In terms of their terminal designations, identification numbers and identification letters, the 3TH42 and 3TH43 contactor relays conform to the standard EN 50011 for Particular Contactor Relays.

Contact reliability of auxiliary contacts

High contact reliability at low voltages and currents as a result of double-break contacts, suitable for solid-state circuits with currents ≥ 1 mA at a voltage of ≥ 17 V.

Protecting connections against overvoltage

Protection against overvoltage at the control supply voltage connection

The 3TH42 and 3TH43 contactor relays can be equipped with RC elements, varistors, diodes or diode assemblies (combination of a diode and a Zener diode) for damping switching overvoltages. The surge suppressors can be mounted directly on the coil, [see page 5/20](#).

Note:

The break times of the contactor, the opening delay times of the NO contacts and the closing delay times of the NC contacts increase with damping.

For more information on how damping influences the time response, [see Equipment Manual](#).

Mounting

Note:

With 3TH4 contactor relays with AC operation, an overvoltage of $1.1 \times U_c$, an ambient temperature ≥ 45 °C and 100% ON period of all contactors, a minimum clearance of 5 mm between the contactors shall be observed in the case of side-by-side mounting.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays




3TH4 contactor relays, 8- and 10-pole

Technical specifications

More information

Technical specifications, see
<https://support.industry.siemens.com/cs/ww/en/ps/16176/td>
 FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/16176/faq>

Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/16176/man>

Type		3TH42	3TH43
General data			
Dimensions (W x H x D)			
<ul style="list-style-type: none"> • AC operation • DC operation 		mm	45 x 78 x 97
		mm	45 x 78 x 130
Permissible mounting position			
<p>The contactor relays are designed for operation on a vertical mounting surface.</p> <ul style="list-style-type: none"> • AC operation 			
<ul style="list-style-type: none"> • DC operation 			
Upright mounting position AC and DC operation		 Special version required	
Mechanical endurance	Basic units	Operating cycles	30 million
Rated insulation voltage U_i (pollution degree 3)		V	690
Rated impulse withstand voltage U_{imp}		kV	8
Protective separation between the coil and the main contacts according to IEC 60947-1, Annex N		V	Up to 500
Permissible ambient temperature			
<ul style="list-style-type: none"> • During operation 		°C	-25 ... +55
<ul style="list-style-type: none"> • During storage 		°C	-55 ... +80
Short-circuit protection			
Short-circuit test			
<ul style="list-style-type: none"> • With fuse links of operational class gG With short-circuit current $I_k = 1$ kA according to IEC 60947-5-1 			
		A	16
		A	16
		A	20
<ul style="list-style-type: none"> • With miniature circuit breakers With short-circuit current $I_k = 400$ A according to IEC 60947-5-1 			
		A	16
		A	16
cULus rated data			
Basic units			
Rated control supply voltage U_c	Max. 600 V AC, 230 V DC (according to UL 240 V DC)		
Rated voltage	600 V AC, 600 V DC		
Switching capacity	A 600, P 600		
Conductor cross-sections			
Auxiliary conductors and coil terminals (1 or 2 conductors can be connected)			
<ul style="list-style-type: none"> • Solid or stranded • Finely stranded with end sleeve • Terminal screw 	mm ²	 Screw terminals 2 x (0.5 ... 1) ¹⁾ ; 2 x (1 ... 2.5) ¹⁾ ; 1 x 4 2 x (0.75 ... 2.5) M3.5	
	mm ²		

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

3TH4 contactor relays, 8- and 10-pole

Type	3TH42, 3TH43	
Control		
Solenoid coil operating range		
• AC operation		0.8 ... 1.1 x U_c ¹⁾
• DC operation (except 24 V)		0.8 ... 1.1 x U_c
- At 24 V DC		0.8 ... 1.2 x U_c
Power consumption of the solenoid coil (for cold coil and 1.0 x U_c)		
• AC operation, 50 Hz, standard version		
- Closing power	VA/p.f.	68/0.82
- Holding power	VA/p.f.	10/0.29
• AC operation, 50/60 Hz, standard version		
- Closing power, 50 Hz	VA/p.f.	77/0.81
- Holding power, 50 Hz	VA/p.f.	11/0.28
- Closing power, 60 Hz	VA/p.f.	71/0.75
- Holding power, 60 Hz	VA/p.f.	9/0.27
• AC operation, 50 Hz, USA/Canada		
- Closing power	VA/p.f.	68/0.82
- Holding power	VA/p.f.	10/0.29
• AC operation, 60 Hz, USA/Canada		
- Closing power	VA/p.f.	75/0.76
- Holding power	VA/p.f.	9.4/0.29 ... 0.3
• AC operation, 50 Hz, Japan		
- Closing power	VA/p.f.	80/0.8
- Holding power	VA/p.f.	10.7/0.29
• AC operation, 60 Hz, Japan		
- Closing power	VA/p.f.	75 ... 90/0.73
- Holding power	VA/p.f.	8.5 ... 10.7/0.29 ... 0.3
• DC operation up to 250 V	W	6.2
Closing power = holding power		
Permissible residual current of the electronics (with 0 signal)		
• For AC operation		$\leq 8 \text{ mA} \times (220 \text{ V}/U_c)$
• For DC operation		$\leq 1.25 \text{ mA} \times (220 \text{ V}/U_c)$
Rated data of the auxiliary contacts		
Load rating with AC		
Rated operational currents I_e		
• AC-12	A	16
• AC-15, at rated operational voltage U_e	230 V A	10
	400 V A	6
	500 V A	4
	690 V A	2
Rated power of three-phase motors	230/220 V kW	2.4
according to utilization categories AC-3 and AC-3e,	400/380 V kW	4
50 Hz	500 V kW	4
	690/660 V kW	4

¹⁾ Coils for USA, Canada and Japan: 0.85 to 1.1 x U_c at 60 Hz.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

3TH4 contactor relays, 8- and 10-pole

Selection and ordering data

8-pole contactor relays

AC operation  or DC operation 

3TH4280-0AP0



3TH4244-0BB4

Contacts	Rated operational current I_g /AC-15 at				Contacts	Ident. No. according to EN 50011	Version	Screw terminals 	PU (UNIT, SET, M)	PS*	PG
	230/ 220 V	400/ 380 V	500 V	690/ 660 V							
Number	A	A	A	A				Article No.	Price per PU		

For screw and snap-on mounting on TH 35 DIN rail

AC operation, rated control supply voltage $U_c = 50$ Hz 230/220 V AC¹⁾

8	10	6	4	2	80E	8	--	--	--	3TH4280-0AP0	1	1 unit	41A
					71E	7	1	--	--	3TH4271-0AP0	1	1 unit	41A
					62E	6	2	--	--	3TH4262-0AP0	1	1 unit	41A
					53E	5	3	--	--	3TH4253-0AP0	1	1 unit	41A
					44E	4	4	--	--	3TH4244-0AP0	1	1 unit	41A
					44E, U	3	3	1	1	3TH4293-0AP0	1	1 unit	41A

DC operation, rated control supply voltage $U_c = 24$ V DC

8	10	6	4	2	80E	8	--	--	--	3TH4280-0BB4	1	1 unit	41A
					71E	7	1	--	--	3TH4271-0BB4	1	1 unit	41A
					62E	6	2	--	--	3TH4262-0BB4	1	1 unit	41A
					53E	5	3	--	--	3TH4253-0BB4	1	1 unit	41A
					44E	4	4	--	--	3TH4244-0BB4	1	1 unit	41A
					44E, U	3	3	1	1	3TH4293-0BB4	1	1 unit	41A

¹⁾ Operating range at 220 V: 0.85 to 1.1 × U_c ;
lower operating range limit according to IEC 60947.

Note:

The solenoid coils of the 3TH42 contactor relays are available in various voltages as spare parts (on request).

- AC operation 3TY7403-0A..
- DC operation 3TY4803-0B..

The contacts cannot be replaced on 3TH42 contactor relays.

Other voltages according to page 5/19 on request.

Accessories, see page 5/20.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

3TH4 contactor relays, 8- and 10-pole

10-pole contactor relays

AC operation  or DC operation 

3TH43..-0AP0



3TH43..-0BB4

Contacts	Rated operational current $I_e/AC-15$ at				Contacts	Ident. No. according to EN 50011	Version	Screw terminals	PU (UNIT, SET, M)	PS*	PG
	230 V	400 V	500 V	690 V							
Number	A	A	A	A				Article No.	Price per PU		
					NO	NC	NO				

For screw and snap-on mounting on TH 35 DIN rail

AC operation, rated control supply voltage $U_c = 50 \text{ Hz } 230/220 \text{ V AC}^{1)}$

10	10	6	4	2	100E	10	--	--	--	3TH4310-0AP0	1	1 unit	41A
					91E	9	1	--	--	3TH4391-0AP0	1	1 unit	41A
					82E	8	2	--	--	3TH4382-0AP0	1	1 unit	41A
					73E	7	3	--	--	3TH4373-0AP0	1	1 unit	41A
					73E, U	6	2	1	1	3TH4346-0AP0	1	1 unit	41A
					64E	6	4	--	--	3TH4364-0AP0	1	1 unit	41A
					55E	5	5	--	--	3TH4355-0AP0	1	1 unit	41A
					55E, U	4	4	1	1	3TH4394-0AP0	1	1 unit	41A

DC operation, rated control supply voltage $U_c = 24 \text{ V DC}$

10	10	6	4	2	100E	10	--	--	--	3TH4310-0BB4	1	1 unit	41A
					91E	9	1	--	--	3TH4391-0BB4	1	1 unit	41A
					82E	8	2	--	--	3TH4382-0BB4	1	1 unit	41A
					73E	7	3	--	--	3TH4373-0BB4	1	1 unit	41A
					73E, U	6	2	1	1	3TH4346-0BB4	1	1 unit	41A
					64E	6	4	--	--	3TH4364-0BB4	1	1 unit	41A
					55E	5	5	--	--	3TH4355-0BB4	1	1 unit	41A
					55E, U	4	4	1	1	3TH4394-0BB4	1	1 unit	41A

¹⁾ Operating range at 220 V: 0.85 to 1.1 x U_c ;
lower operating range limit according to IEC 60947.

Note:

The solenoid coils of the 3TH43 contactor relays are available in various voltages as spare parts (on request).

- AC operation 3TY7403-0A..
- DC operation 3TY4803-0B..

The contacts cannot be replaced on 3TH43 contactor relays.

Other voltages according to page 5/19 on request.

Accessories, see page 5/20.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

3TH4 contactor relays, 8- and 10-pole

Options

Rated control supply voltages, possible on request (change of the 10th and 11th digits of the article number)

Delivery times on request

Rated control supply voltage U_c		Control supply voltage at	3TH42/3TH43
AC operation			
Solenoid coils for 50 and 60 Hz AC			
50 Hz	60 Hz		
24 V AC	29 V AC	B0	
42 V AC	50 V AC	D0	
48 V AC	58 V AC	H0	
110 V AC	132 V AC	F0	
125/127 V AC	150/152 V AC	L0	
230/220 V AC	276 V AC	P0 ¹⁾	
50/60 Hz			
24 V AC		C2	
42 V AC		D2	
110 V AC		G2	
220 V AC		N2	
230 V AC		L2	
240 V AC		P2	
For USA and Canada			
50 Hz	60 Hz		
110 V AC	120 V AC	K6 ²⁾	
220 V AC	240 V AC	P6 ²⁾	

¹⁾ Operating range at 220 V or 380 V: 0.85 to 1.1 x U_c .

²⁾ Operating range at 60 Hz: 0.85 to 1.1 x U_c .

Rated control supply voltage U_c		3TH42/3TH43
DC operation		
24 V DC		B4
42 V DC		D4
48 V DC		W4
60 V DC		E4
110 V DC		F4
125 V DC		G4
220 V DC		M4
230 V DC		P4
240 V DC		Q4

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Contactor relays

3TH4 contactor relays, 8- and 10-pole > Accessories for 3TH4 contactor relays

Selection and ordering data

Version	Rated control supply voltage U_c		Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	AC	DC					
	V	V					

Surge suppressors for 3TH4 contactor relays



3TX7402-3.

Interference suppression diode With line spacer, for mounting on the coil terminal	--	24 ... 250	3TX7402-3A		1	1 unit	41B
Diode assembly (diode and Zener diode) With line spacer, DC operation, for mounting on the coil terminal	--	24 ... 250	3TX7402-3D		1	1 unit	41B
Varistors¹⁾ With line spacer, for mounting on the coil terminal	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250 -- --	3TX7402-3G 3TX7402-3H 3TX7402-3J 3TX7402-3K 3TX7402-3L		1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
RC elements With line spacer, for mounting on the coil terminal	24 ... 48 48 ... 127 127 ... 240 240 ... 400 400 ... 600	24 ... 70 70 ... 150 150 ... 250 -- --	3TX7402-3R 3TX7402-3S 3TX7402-3T 3TX7402-3U 3TX7402-3V		1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B

¹⁾ Includes the peak value of the superimposed alternating voltage on the DC side.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Overview



Picture on left: 3RQ1000-1EW00 coupling relay, 1 NO contact + 1 NC contact, screw terminal
 Picture on right: 3RQ1000-2LW00 coupling relay, 4 NO contacts + 1 NC contact, spring-loaded terminal (push-in)



3RQ1 coupling relay in the 3SK system

More information

Homepage, see www.siemens.com/sirius-coupling-relays
 SiePortal, see www.siemens.com/product_catalog_siep?3RQ1
 Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/26008/td>
 Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/26008/man>
 TIA Selection Tool Cloud (TST Cloud), see www.siemens.com/tstcloud/?node=SIRIUSRelais
 SIRIUS 3SK safety relays, see <https://mall.industry.siemens.com/mall/en/ww/Catalog/Products/10143262?tree=CatalogTree>



Video: SIRIUS 3RQ1 coupling relays

The SIRIUS 3RQ1 force-guided coupling relays in a modern titanium gray industrial enclosure are available in widths of 17.5 mm and 22.5 mm, and each with a supply voltage of 24 V DC (120 mm mounting depth) and 24 to 240 V AC/DC (90 mm mounting depth).

They are used for safe coupling up to SIL 3/PL e of control signals to and from a control system or as an output expansion for the SIRIUS 3SK safety relays (see page 11/13 onwards).

Further fields of application are based on the force-guided operation of relays according to IEC 60947-5-1 and EN 61810-3 for reading back relay states, for reliable diagnostics or signaling, or for the use of antivalent signals. Typical fields of application here are railways, signaling technology and elevators.

The series consists of devices with up to five outputs and can be supplied with screw or spring-loaded (push-in) terminals.

International standards and certifications including CE, UL/CSA, EAC and railway approvals ensure international usability and exportability.

Versions with protective coating on the printed circuit board according to IPC-A-610 are available for use in harsh ambient conditions (other device versions are available on request).

An extensive range of accessories is also available, such as device connectors for easy and safe connection of the 3RQ1 devices, replacement terminals, push-in lugs for wall mounting and coding pins, see page 5/27 onwards.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Article number scheme

Product versions		Article number											
Coupling relays with force-guided contacts		3RQ1	<input type="checkbox"/>										
Version	Performance Level (SIL): c (SIL 2)	0											
	Performance Level (SIL): e (SIL 3)	2											
Connection methods	Screw terminals				1								
	Spring-loaded terminals (push-in)				2								
Outputs	1 NO + 1 NC					E							Width 17.5 mm
	2 NO + 1 NC					G							Width 17.5 mm
	2 NO + 2 NC					H							Width 22.5 mm
	4 NO + 1 NC					L							Width 22.5 mm
Control supply voltage	24 V DC							B					Depth 120 mm
	24 to 240 V AC/DC							W					Depth 90 mm
Versions	With protective coating on printed circuit board											0 A X 0	
Example		3RQ1	0	0	0	-	1	E	W	0	0		

Note:

The article number scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

Benefits

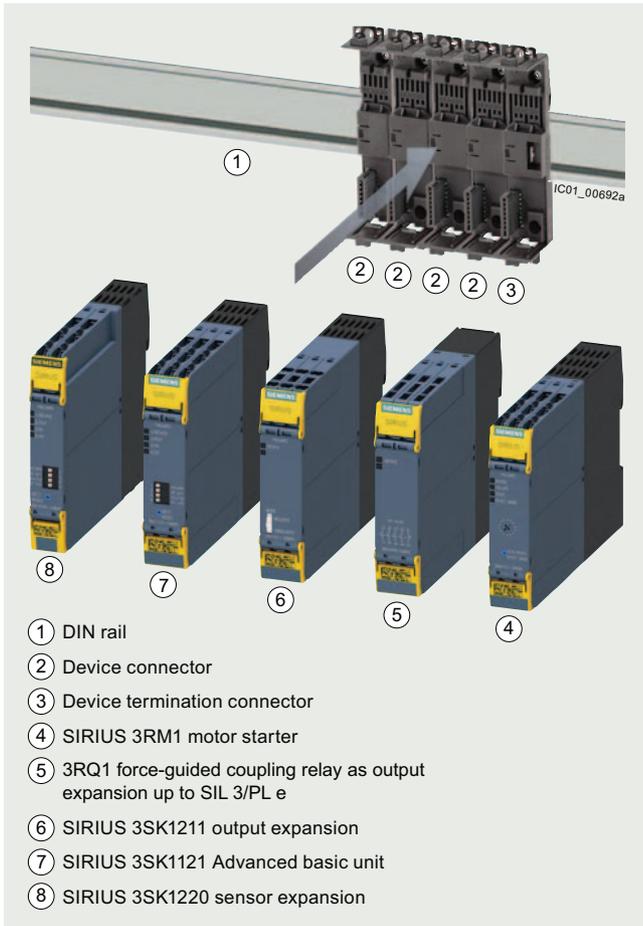
- Wide-range voltage versions from 24 to 240 V AC/DC available with a mounting depth of 90 mm for all versions
- Permanent wiring by means of removable terminals with screw terminals or spring-loaded terminals (push-in)
- Replacement of individual terminals minimizes wiring effort
- Can be used as output expansion for SIRIUS 3SK safety relays via device connectors
- All versions with real load contacts, also in the NC circuit
- Safety certification according to functional safety SIL 3/PL e
- Device versions with protective coating on printed circuit board
- International standards and certifications including CE, UL/CSA, EAC, railway approvals, and more

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Application



- Safe coupling up to SIL 3/PL e of control signals from and to a control system
- Output expansion for 3SK safety relays
- Use of force-guided contacts for reading back relay states
- For reliable diagnostics or signaling or for antivalent switching of loads
- Safe coupling:
 - Electrical separation between the input and output circuit
 - Adjustment of different signal levels
 - Signal amplification
 - Contact multiplication

3RQ1 output expansion (up to SIL 3/PL e) for the 3SK system

The 3RQ1 force-guided coupling relays with a mounting depth of 120 mm can be used as an output expansion up to SIL 3/PL e and can be connected by wiring to all 3SK basic units and by using the 3ZY12 device connector to all 3SK 1 and 3SK2 Advanced basic units.

They have a switching capacity of AC-15 5/3 A (like 3SK1211) at a switching voltage of 230 V and are available in widths of 17.5 and 22.5 mm. Furthermore, they have NC contacts with a switching capacity of AC-15 2/1.5 A for direct switching of loads (anti-parallel switching, signaling, etc.).

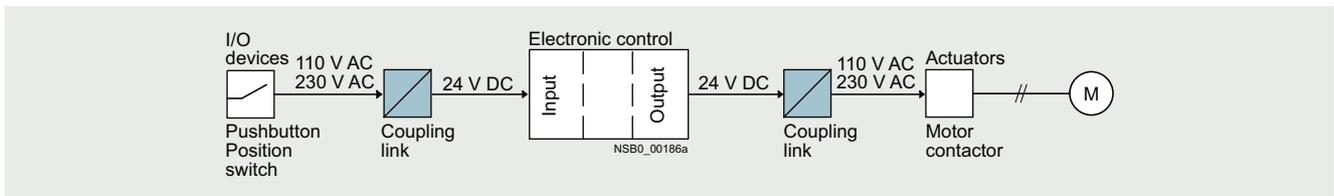
Suitable for use in harsh ambient conditions

Versions with protective coating on the printed circuit board according to IPC-A-610 are available for use in environments that are exposed to dust, condensation, rapid temperature changes and corrosion. These are intended for applications in rail systems, agriculture, mining, woodworking, etc.

Note:

Other device versions with protective coating on the printed circuit board are available on request.

System configuration example with SIRIUS 3SK safety relays



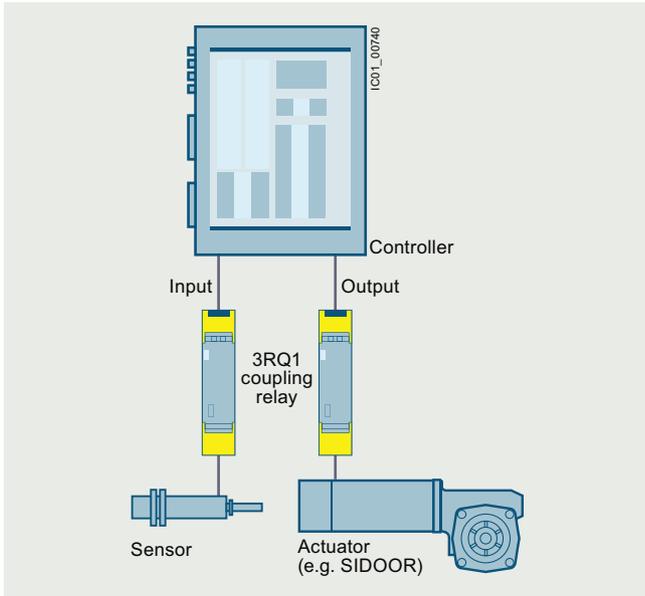
Typical application with a fail-safe control system

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

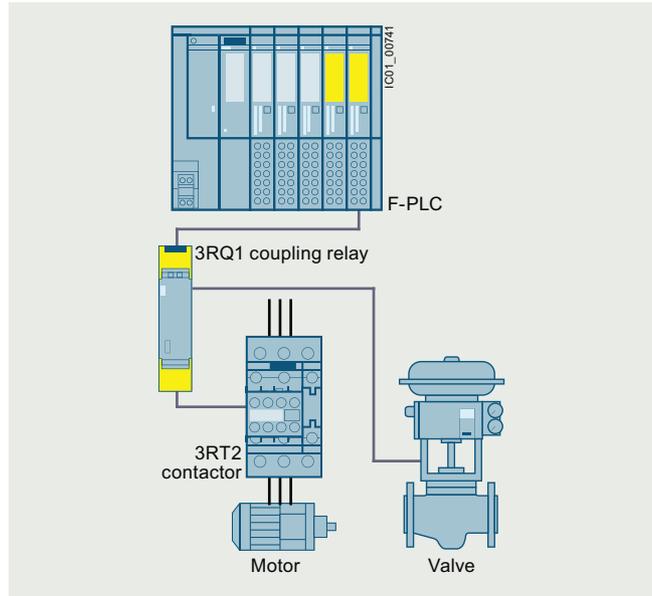
Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

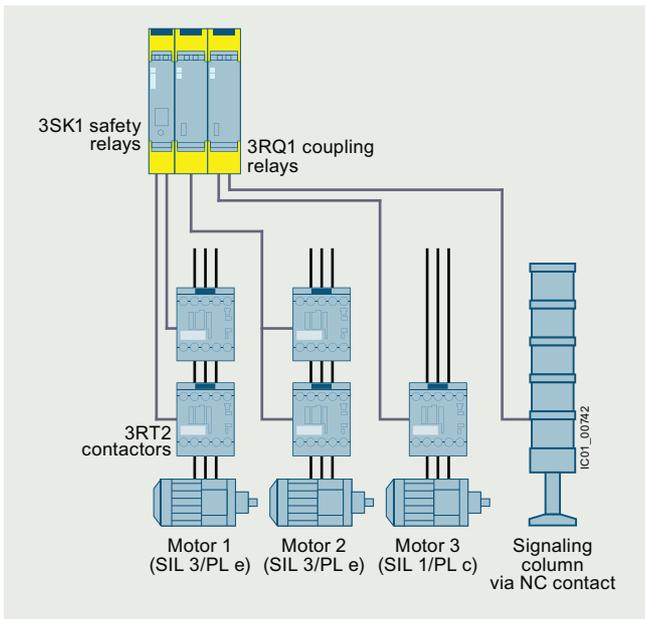
Applications



Application based on force-guided operation



3RQ1 as coupling link for signals, e.g. for a fail-safe control system




3RQ1 as output expansion (SIL 1 to 3) for 3SK with direct control of actuators and signaling elements

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Technical specifications

More information							
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/26008/td				Manuals, see https://support.industry.siemens.com/cs/ww/en/ps/26008/man Equipment Manual 3SK1/3RQ1, see https://support.industry.siemens.com/cs/ww/en/view/67585885			
Article number	3RQ1000- .EB00, .GB00	3RQ1200- .EB00	3RQ1000- .EW00, .GW00	3RQ1200- .EW00	3RQ1000- .HB00, .LB00	.HW00, .LW00	2HW00-0AX0
General data							
Dimensions (W x H x D)		mm	17.5 x 100 x 120	17.5 x 100 x 90	22.5 x 100 x 120	22.5 x 100 x 90	
Safety Integrity Level (SIL) according to IEC 62061			SIL 2	SIL 3	SIL 2	SIL 3	SIL 2
Performance Level (PL) according to ISO 13849-1			PL c	PL e	PL c	PL e	PL c
Certificate of suitability			<ul style="list-style-type: none"> • UL approval • TÜV approval 				
Insulation voltage for overvoltage category III according to IEC 60664 for pollution degree 3	V		300				
Protective coating on printed circuit board			No; --				Yes, according to IPC-A-610
Ambient temperature			<ul style="list-style-type: none"> • During operation °C -25 ... +60 • During storage °C -40 ... +80 				
Degree of protection IP			IP20				
Control circuit							
Control supply voltage			<ul style="list-style-type: none"> • At AC <ul style="list-style-type: none"> - At 50 Hz V -- - At 60 Hz V -- • At DC V 24 				
Operating range factor of the control supply voltage, rated value at DC			0.8 ... 1.2	0.7 ... 1.1	0.8 ... 1.2	0.7 ... 1.1	
Load circuit							
Thermal current of the non-solid-state contact blocks, maximum	A		5				
Mechanical endurance (operating cycles) typical			10 000 000				
Article number	3RQ1000-1., 3RQ1200-1.			3RQ1000-2., 3RQ1200-2.			
Type of electrical connection	 Screw terminals			 Spring-loaded terminals  (push-in)			
Type of connectable conductor cross-sections			<ul style="list-style-type: none"> • Solid 1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²) • Finely stranded with end sleeve 1x (0.5 ... 4 mm²), 2x (0.5 ... 1.5 mm²) • Solid for AWG cables 1x (20 ... 12), 2x (20 ... 14) 		<ul style="list-style-type: none"> • Solid 1x (0.5 ... 4 mm²) • Finely stranded with end sleeve 1x (0.5 ... 2.5 mm²) • Solid for AWG cables 1x (20 ... 12) 		
Tightening torque	Nm		0.6 ... 0.8		--		

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41H

Multi-unit packaging, see page 16/7.

Control supply voltage		Number of auxiliary contacts	Depth	Suitable for use with 3ZY12 device connector	Protective coating on printed circuit board	Screw terminals 		Spring-loaded terminals (push-in) 	
at AC at 50/60 Hz	at DC					Article No.	Price per PU	Article No.	Price per PU
V	V	NO NC	mm						

Width 17.5 mm



3RQ1000-1EW00 3RQ1000-2EW00

Fail-safe up to SIL 2/PL c

--	24	1	1	120	Yes	No		
--	24	2	1	120	Yes	No		
24 ... 240	24 ... 240	1	1	90	No	No		
24 ... 240	24 ... 240	2	1	90	No	No		

3RQ1000-1EB00
3RQ1000-1GB00
3RQ1000-1EW00
3RQ1000-1GW00

3RQ1000-2EB00
3RQ1000-2GB00
3RQ1000-2EW00
3RQ1000-2GW00

Fail-safe up to SIL 3/PL e

--	24	1	0 ¹⁾	120	Yes	No		
24 ... 240	24 ... 240	1	1	90	No	No		

3RQ1200-1EB00
3RQ1200-1EW00

3RQ1200-2EB00
3RQ1200-2EW00

Width 22.5 mm



3RQ1000-1LW00 3RQ1000-2LW00

Fail-safe up to SIL 2/PL c

--	24	2	2	120	Yes	No		
--	24	4	1	120	Yes	No		
24 ... 240	24 ... 240	2	2	90	No	No		
24 ... 240	24 ... 240	2	2	90	No	Yes		
24 ... 240	24 ... 240	4	1	90	No	No		

3RQ1000-1HB00
3RQ1000-1LB00
3RQ1000-1HW00
--
3RQ1000-1LW00

3RQ1000-2HB00
3RQ1000-2LB00
3RQ1000-2HW00
3RQ1000-2HW00-0AX0
3RQ1000-2LW00

¹⁾ NC contact designed to act as feedback contact.

Notes:

All 3RQ1 force-guided coupling relays have Safety certification up to SIL 2/PL c or SIL 3/PL e according to IEC 62061/ISO 13849-1.

To achieve SIL 3/PL e, two 3RQ10 devices can also be wired in series, see [Equipment Manual](#).

In addition, the 3SK1211 devices (output expansions for 3SK) provide force-guided coupling relays with 4 NO contacts and 1 NC contact up to SIL 3/PL e with 24 V AC, 24 V DC, and 110 to 240 V AC/DC.

For applications with high currents up to a switching capacity of 10 A AC-15, the 3SK1213 output expansions are also available with 24 V AC, 24 V DC, and 110 to 240 V AC/DC.

These devices can be used in the same way as the 3RQ1 coupling relays for coupling to and from safe control systems, they feature 4 NO contacts and 1 NC contact, and are available as versions with 24 V AC, 24 V DC, and 110 to 240 V AC/DC (see [page 11/28](#)).

Other device versions with protective coating on the printed circuit board are available on request.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Accessories

More information

Manuals, see
<https://support.industry.siemens.com/cs/ww/en/ps/26008/man>

Version	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
---------	-------------	--------------	-------------------	-----	----

Device connectors for the electrical connection of SIRIUS devices in the industrial DIN-rail enclosure



3ZY1212-1BA00
3ZY1212-2BA00

Device connectors

- Width 17.5 mm (for 3RQ1000-.EB00/-.GB00, 3RQ1200-.EB00)
- Width 22.5 mm (for 3RQ1000-.HB00/-.LB00)

3ZY1212-1BA00	1	1 unit	41L
3ZY1212-2BA00	1	1 unit	41L



3ZY1212-2DA00

Device termination connectors

- Width 17.5 mm (for 3RQ1000-.EB00/-.GB00, 3RQ1200-.EB00)
- Width 22.5 mm (for 3RQ1000-.HB00/-.LB00)

Note:
Observe positions of the slide switch for width 22.5 mm, see [Equipment Manual](#).

3ZY1212-1DA00	1	1 unit	41L
3ZY1212-2DA00	1	1 unit	41L

Device daisy chain connector

24 V DC, 22.5 mm, for implementation of distances between devices according to the installation guidelines

3ZY1212-2AB00	1	1 unit	41L
---------------	---	--------	-----

Device connector

For height adjustment for device arrangements without electrical connection via device connector, with a width of 22.5 mm or greater

3ZY1210-2AA00	1	1 unit	41L
---------------	---	--------	-----

Terminals for SIRIUS devices in the industrial DIN-rail enclosure



3ZY1122-1BA00
3ZY1122-2BA00

Removable terminals, without labeling


- 2-pole, up to 1 x 4 mm² or 2 x 2.5 mm²
- 2-pole, up to 1 x 4 mm² or 2 x 1.5 mm² (in shared end sleeve)

Screw terminals 			
3ZY1122-1BA00	1	6 units	41L
Spring-loaded terminals (push-in) 			
3ZY1122-2BA00	1	6 units	41L

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ1 force-guided coupling relays, fail-safe up to SIL 3/PL e

Version	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Accessories for enclosures					
 3ZY1321-2AA00	Sealing covers <ul style="list-style-type: none"> • 17.5 mm • 22.5 mm 	3ZY1321-1AA00 3ZY1321-2AA00	1	5 units	41L
				1	5 units
 3ZY1311-0AA00	Push-in lugs for wall mounting (two lugs are required per device)	3ZY1311-0AA00	1	10 units	41L
 3ZY1440-1AA00	Coding pins For removable terminals of SIRIUS devices in the industrial DIN-rail enclosure; they enable the mechanical coding of terminals, see Equipment Manual .	3ZY1440-1AA00	1	12 units	41L
 3ZY1450-1BA00 3ZY1450-1BB00	Hinged covers Replacement covers, without terminal labeling, yellow <ul style="list-style-type: none"> • 17.5 mm wide • 22.5 mm wide 	3ZY1450-1BA00 3ZY1450-1BB00	1	5 units	41L
				1	5 units
Blank labels					
 3RT2900-1SB20	Unit labeling plates¹⁾ For SIRIUS devices <ul style="list-style-type: none"> • 17.5 mm: 10 mm x 7 mm, titanium gray • 22.5 mm: 20 mm x 7 mm, titanium gray 	3RT2900-1SB10 3RT2900-1SB20	100	816 units	41B
				100	340 units
Tools for opening spring-loaded terminals					
 3RA2908-1A	Screwdriver For all SIRIUS devices with spring-loaded terminals 3.0 mm x 0.5 mm, length approx. 200 mm, titanium gray/black, partially insulated	Spring-loaded terminals (push-in)  3RA2908-1A	1	1 unit	41B

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/18).

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ2 coupling relays with industrial enclosure

Overview



SIRIUS 3RQ2 coupling relay, screw terminals, 3 changeover contacts

More information

Homepage, see www.siemens.com/sirius-coupling-relays
 SiePortal, see www.siemens.com/product_catalog_siep?3RQ2
 TIA Selection Tool Cloud (TST Cloud), see www.siemens.com/tstcloud/?node=SIRIUSRelais
 Conversion tool, see www.siemens.com/conversion-tool

Article number scheme

Product versions		Article number						
Coupling relays, standard		3RQ2000	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	<input type="checkbox"/>
Connection methods	Screw terminals			1				
	Spring-loaded terminals (push-in)			2				
Outputs	1 CO contact				A			
	2 CO contacts				B			
	3 CO contacts				C			
Control supply voltage	24 ... 240 V AC/DC					W		
Material of switching contacts	AgSnO ₂						0	
	AgNi + Au						1	
Example		3RQ2000	-	1	C	W	0	1

Note:

The article number scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

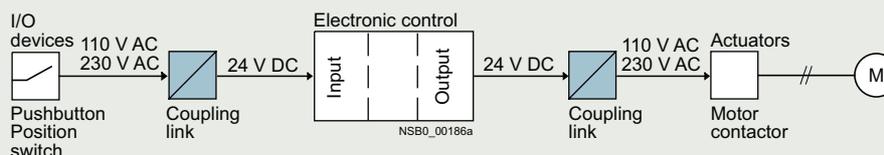
For your orders, please use the article numbers quoted in the selection and ordering data.

Benefits

- Permanent wiring by means of removable terminals with screw terminals or spring-loaded terminals (push-in)
- Replacement of individual terminals minimizes wiring effort
- A product for all voltages from 24 to 240 V AC/DC
- Reduced costs thanks to fewer versions
- Especially high contact reliability even at low currents thanks to versions with hard gold-plated contacts
- International standards and certifications including CE, UL/CSA, EAC, railway approvals, and more

Application

- Electrical separation between the input and output circuit
- Adjustment of different signal levels
- Signal amplification
- Contact multiplication




Application example motor controller

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ2 coupling relays with industrial enclosure

Technical specifications

More information		
Technical specifications, see https://support.industry.siemens.com/cs/ww/en/ps/25158/td	Operating Instructions, see https://support.industry.siemens.com/cs/ww/en/ps/25158/man	
Article number	3RQ2000-AW00, 3RQ2000-BW00, 3RQ2000-CW00	3RQ2000-CW01
General data		
Width x height x depth	 mm	22.5 x 100 x 90
Insulation voltage for overvoltage category III according to IEC 60664 for pollution degree 3	V	300
Max. permissible voltage for protective separation between control circuit and auxiliary circuit according to IEC 60947-1	V	300
Ambient temperature		
• During operation	°C	-40 ... +60
• During storage	°C	-40 ... +80
Degree of protection IP	IP20	
Control circuit		
Voltage type	V	AC/DC
Control supply voltage		
• At AC		
- At 50 Hz	V	24 ... 240
- At 60 Hz	V	24 ... 240
• At DC	V	24 ... 240
Operating range factor of the control supply voltage, rated value at AC		
• At 50 Hz		0.7 ... 1.1
• At 60 Hz		0.7 ... 1.1
Load circuit		
Thermal current of the non-solid-state contact blocks, maximum	A	5
Current-carrying capacity of the output relay		
• At AC-15 at 250 V at 50/60 Hz	A	3
• At DC-13		
- At 24 V	A	1
- At 125 V	A	0.2
- At 250 V	A	0.1
Mechanical endurance (operating cycles) typical	10 000 000	
Electrical endurance (operating cycles) for AC-15 at 230 V, typical	100 000	
Material of switching contacts	AgSnO2	AgNi + Au
Article number	3RQ2000-1.	3RQ2000-2.
Type of electrical connection	 Screw terminals	 Spring-loaded terminals (push-in)
Type of connectable conductor cross-sections		
• Solid	1x (0.5 ... 4 mm ²), 2x (0.5 ... 2.5 mm ²)	1x (0.5 ... 4 mm ²)
• Finely stranded with end sleeve	1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²)	1x (0.5 ... 2.5 mm ²)
• Solid for AWG cables	1x (20 ... 12), 2x (20 ... 14)	1x (20 ... 12)
Tightening torque	Nm	--
	0.6 ... 0.8	

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ2 coupling relays with industrial enclosure

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41H

Multi-unit packaging,
 see page 16/7.

Control supply voltage at AC at 50/60 Hz	Control supply voltage at DC	Number of CO contacts for auxiliary contacts	Material of switching contacts	Screw terminals 	Spring-loaded terminals (push-in) 		
V	V			Article No.	Price per PU	Article No.	Price per PU

Coupling relays with industrial enclosure, 22.5 mm



3RQ2000-1CW00

3RQ2000-2CW00

24 ... 240	24 ... 240	1	AgSnO ₂	3RQ2000-1AW00		3RQ2000-2AW00	
		2	AgSnO ₂	3RQ2000-1BW00		3RQ2000-2BW00	
		3	AgSnO ₂	3RQ2000-1CW00		3RQ2000-2CW00	
			AgNi + Au	3RQ2000-1CW01		3RQ2000-2CW01	

Accessories

More information

Operating Instructions, see
<https://support.industry.siemens.com/cs/ww/en/ps/25158/man>

Conversion tool, see www.siemens.com/conversion-tool

Version	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
---------	-------------	-----------------	-------------------------	-----	----

Terminals for SIRIUS devices in the industrial DIN-rail enclosure



3ZY1122-1BA00

Removable terminals, without labeling

- 2-pole, up to 1 x 4 mm² or 2 x 2.5 mm²
- 2-pole, up to 1 x 4 mm² or 2 x 1.5 mm² (in shared end sleeve)

Screw terminals

3ZY1122-1BA00

1 6 units 41L

Spring-loaded terminals (push-in)

3ZY1122-2BA00

1 6 units 41L

Accessories for enclosures



3ZY1450-1AB00

Hinged covers

Replacement covers, without terminal labeling, titanium gray, 22.5 mm wide

3ZY1450-1AB00

1 5 units 41L



3ZY1311-0AA00

Push-in lugs for wall mounting (two lugs are required per device)

3ZY1311-0AA00

1 10 units 41L



3ZY1440-1AA00

Coding pins

For removable terminals of SIRIUS devices in the industrial DIN-rail enclosure; they enable the mechanical coding of terminals

3ZY1440-1AA00

1 12 units 41L

Blank labels



3RT2900-1SB20

Unit labeling plates

For SIRIUS devices
 20 mm x 7 mm, titanium gray¹⁾

3RT2900-1SB20

100 340 units 41B

Tools for opening spring-loaded terminals



3RA2908-1A

Screwdriver

For all SIRIUS devices with spring-loaded terminals
 3.0 mm x 0.5 mm, length approx. 200 mm, titanium gray/black, partially insulated

Spring-loaded terminals (push-in)

3RA2908-1A

1 1 unit 41B

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/18).

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ2 coupling relays with industrial enclosure

More information

Code conversion table

SIRIUS 3RS18 coupling relays				Comparison type SIRIUS 3RQ2 coupling relays			
Screw terminals	Spring-loaded terminals	Version	Contacts	Screw terminals	Spring-loaded terminals (push-in)	Version	Contacts
3RS1800-1AQ00	3RS1800-2AQ00	24 V AC/DC; 110 ... 120 V AC	1 CO contact	3RQ2000-1AW00	3RQ2000-2AW00	24 ... 240 V AC/DC	1 CO contact
3RS1800-1AP00	3RS1800-2AP00	24 V AC/DC; 220 ... 240 V AC	2 CO contacts	3RQ2000-1BW00	3RQ2000-2BW00	24 ... 240 V AC/DC	2 CO contacts
3RS1800-1BW00	3RS1800-2BW00	24 ... 240 V AC/DC					
3RS1800-1BQ00	3RS1800-2BQ00	24 V AC/DC; 110 ... 120 V AC	3 CO contacts	3RQ2000-1CW00	3RQ2000-2CW00	24 ... 240 V AC/DC	3 CO contacts
3RS1800-1BP00	3RS1800-2BP00	24 V AC/DC; 220 ... 240 V AC					
3RS1800-1HW00	3RS1800-2HW00	24 ... 240 V AC/DC	3 CO contacts, hard gold-plated	3RQ2000-1CW01	3RQ2000-2CW01	24 ... 240 V AC/DC	3 CO contacts, hard gold-plated
3RS1800-1HQ00	3RS1800-2HQ00	24 V AC/DC; 110 ... 120 V AC					
3RS1800-1HP00	3RS1800-2HP00	24 V AC/DC; 220 ... 240 V AC					
3RS1800-1HW01	3RS1800-2HW01	24 ... 240 V AC/DC					
3RS1800-1HQ01	3RS1800-2HQ01	24 V AC/DC; 110 ... 120 V AC					
3RS1800-1HP01	3RS1800-2HP01	24 V AC/DC; 220 ... 240 V AC					

Overview



SIRIUS 3RQ4 coupling relays

More information

Homepage, see www.siemens.com/sirius-coupling-relays
 SiePortal, see www.siemens.com/product_catalog_siep?3RQ4
 TIA Selection Tool Cloud (TST Cloud), see www.siemens.com/tstcloud/?node=SIRIUSRelais
 Conversion tool, see www.siemens.com/conversion-tool

SIRIUS 3RQ4 coupling relays in narrow design are used for coupling control signals from and to a controller, and they are available in different versions:

- Coupling relays with integrated relay output
- Coupling relays with plug-in relays
- Coupling relays with integrated semiconductor output

Versions with protective coating on the printed circuit board according to IPC-A-610 are available for use in harsh ambient conditions (other device versions are available on request).

Coupling relays with integrated relay output

AC and DC operation

IEC 60947-5-1

The input and output coupling relays differ with regard to the positioning of the terminals and the LEDs.

Coupling relays with plug-in relays

AC and DC operation

IEC 60947-1

The coupling relays are plug-in, so the relay can be replaced quickly at the end of its service life without detaching the wiring.

For test purposes, versions are available with manual-OFF-automatic switches.

Coupling relays with integrated semiconductor output

AC and DC operation

IEC 60947-1, EN 60664-1 and EN 50005;
 coupling relays with semiconductor output: EN 60747-5;
 programmable logic controllers: IEC 61131-2

The input and output coupling relays differ with regard to the positioning of the terminals and the LEDs.

The coupling relays with semiconductor output have extremely high contact reliability, so they are especially suitable for solid-state systems.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ4 coupling relays, narrow design **NEW**

Article number schemes

Product versions		Article number			
Coupling relays with integrated relay output		3RQ40 □ 8 – □ A □ 0 □			
Design and type of output	Output coupler	1			
	Input coupler	3			
Type of electrical connection	Screw terminals		1		
	Spring-loaded terminals (push-in)		2		
Control supply voltage	24 V AC/DC			B	
	115 V AC/DC			E	
	230 V AC/DC			F	
Material of switching contacts	AgSnO2				0
	AgSnO2 hard gold-plated				1
Example		3RQ40 1 8 – 1 A B 0 1			

Product versions		Article number			
Coupling relays with integrated relay output		3RQ40 1 8 – 2 A □ 0 8 – 0 A □ 0			
Railway version with extended operating range 0.7 ... 1.2 x U _c					
Control supply voltage	24 V DC			M	
	110 V DC			N	
Versions	Standard printed circuit board				A
	With protective coating on printed circuit board				X
Example		3RQ40 1 8 – 2 A M 0 8 – 0 A A 0			

Product versions		Article number			
Coupling relays with plug-in relays		3RQ41 □ 8 – □ A □ 0 □			
Design and type of output	Output coupler				
	Without manual-OFF-automatic switch	1			
	With manual-OFF-automatic switch	2			
Type of electrical connection	Screw terminals		1		
	Spring-loaded terminals (push-in)		2		
Control supply voltage	24 V AC/DC			B	
	115 V AC/DC			E	
	230 V AC/DC			F	
	24 V DC			M	
Material of switching contacts	AgSnO2				0
	AgSnO2 hard gold-plated				1
Example		3RQ41 1 8 – 1 A B 0 1			

Product versions		Article number					
Coupling relays with integrated semiconductor output		3RQ40 □ □ – □ S □ □ 0					
Design and type of output	Output coupler	Current-carrying capacity of the semiconductor output				Control supply voltage	Switching voltage of the semiconductor output
		at DC 0.001 ... 3 A	5 0	□	M 5	11 ... 30 V DC	10 ... 60 V DC
		at DC 0.001 ... 6 A	5 2	□	M 3	11 ... 30 V DC	10 ... 30 V DC
		at DC 0.001 ... 3 A	5 2	□	M 4	11 ... 30 V DC	10 ... 60 V DC
		at AC 0.005 ... 3 A	5 2	□	M 5	11 ... 30 V DC	20 ... 264 V AC
		at DC 0.001 ... 6 A	5 3	□	G 3	110 ... 230 V AC/DC	10 ... 30 V DC
	at DC 0.001 ... 6 A	5 5	□	M 3	11 ... 30 V DC	10 ... 30 V DC	
	Input coupler	at DC 0.001 ... 6 A	7 0	□	B 3	11 ... 30 V AC/DC	10 ... 30 V DC
		7 0	□	G 3	110 ... 230 V AC/DC	10 ... 30 V DC	
Type of electrical connection	Screw terminals						
	Spring-loaded terminals (push-in)						
Example		3RQ40 7 0 – 1 S B 3 0					

Note:

The article number schemes show an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

NEW SIRIUS 3RQ4 coupling relays, narrow design

Benefits

General

- All versions with screw terminals or spring-loaded terminals (push-in technology)
- TOP wiring with spring-loaded terminals (push-in) for quick and reliable wiring
- Low space requirements in the control cabinet thanks to a consistent width of 6.2 mm
- Reduced stock-keeping due to fewer variants
- Clearly visible functional state of the coupling relay by green LED
- Integrated reverse polarity protection and EMC suppressor diode
- Standardized accessories across the entire 3RQ4 series
- Universal bridging option using connecting combs for all terminals
- Galvanic isolation plate for isolating different voltages for neighboring units
- Device versions with protective coating on printed circuit board
- Clip-on labels available as set for individual labeling
- Highest quality (Made in Germany)
- Sustainable product design (Siemens EcoTech label)

Coupling relays with integrated relay output

- Relays fixed in enclosure for increased contact reliability
- Device versions with hard gold-plated contacts, hence high contact reliability at low currents
- ATEX certification
- Safety Ready (B10d values available)

Coupling relays with plug-in relays

- Fast replacement of the relays with existing wiring
- Shorter installation times thanks to certified complete units
- Individual relays available as spare parts
- Device versions with hard gold-plated contacts, hence high contact reliability at low currents

Coupling relays with integrated semiconductor output

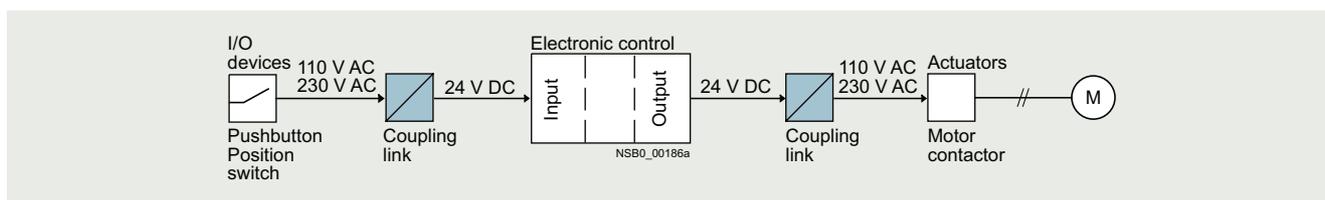
- Long service life since there is no mechanical wear
- High switching frequency thanks to short make-break times
- Vibration-resistant
- No contact bounce
- Extremely high contact reliability
- Noise-free switching
- Low control power required
- Switching of DC and capacitive loads

Note:

With semiconductors, the switching current is not dependent on the inductance of the load, i.e. the switching current for an inductive DC-13 load is the same as that for a DC-12 load. This means that coupling links with a semiconductor output are particularly suitable for inductive loads such as solenoid valves. It is not relevant to specify the number of operating cycles, because this does not affect the endurance of the semiconductor, provided it is not overheated.

Application

- Electrical separation between the input and output circuit
- Adjustment of different signal levels
- Signal amplification



Application example motor controller

Suitable for use in harsh ambient conditions

Versions with protective coating on the printed circuit board according to IPC-A-610 are available for use in environments that are exposed to dust, condensation, rapid temperature changes and corrosion. These are intended for applications in rail systems, agriculture, mining, woodworking, etc.

Note:

Other device versions with protective coating on the printed circuit board are available on request.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ4 coupling relays, narrow design **NEW**


Technical specifications

More information

Technical specifications, see
<https://support.industry.siemens.com/cs/ww/en/ps/30428/td>

Operating Instructions, see
<https://support.industry.siemens.com/cs/ww/en/ps/30428/man>
 FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/30428/faq>

Coupling relays with integrated relay output


Article number	3RQ40.8-						3RQ4018-			
	.AB00	.AB01	.AE00	.AE01	.AF00	.AF01	2AM08-0AA0	2AM08-0AX0	2AN08-0AA0	2AN08-0AX0
General technical specifications										
Width x height x depth			mm	6.2 x 93 x 84.5						
Insulation voltage for overvoltage category III according to IEC 60664 for pollution degree 3	V	300								
Max. permissible voltage for protective separation between control circuit and auxiliary circuit	V	300								
Protective coating on printed circuit board	No; --							Yes, according to IPC-A-610	No; --	Yes, according to IPC-A-610
Ambient temperature										
• During operation	°C	-25 ... +60				-40 ... +70				
• During storage	°C	-40 ... +85								
• During transport	°C	-40 ... +85								
Degree of protection IP	IP20									
Version of the fuse link required for short-circuit protection of the auxiliary switch	Fuse gG: 4 A									
Operational current of the auxiliary contacts										
• At AC-15										
- At 24 V	A	3								
- At 250 V	A	3								
• At DC-13										
- At 24 V	A	1								
- At 125 V	A	0.2								
- At 250 V	A	0.1								
Contact reliability of the auxiliary contacts (one contact failure per 100 million)		17 V, 5 mA	5 V, 1 mA	17 V, 5 mA	5 V, 1 mA	17 V, 5 mA	5 V, 1 mA	17 V, 5 mA		
Mechanical endurance (operating cycles) typical	10 000 000									
Electrical endurance (operating cycles) for AC-15 at 250 V typical	100 000									
Operating range factor of the control supply voltage, rated value										
• At AC										
- At 50 Hz		0.8 ... 1.25	0.8 ... 1.1				--			
- At 60 Hz		0.8 ... 1.25	0.8 ... 1.1				--			
• At DC		0.85 ... 1.25	0.8 ... 1.1				0.7 ... 1.25			
Active power input	W	0.3	0.5	1.3			0.3	0.5		
Thermal current	A	6								
B10d value	600 000									

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

NEW SIRIUS 3RQ4 coupling relays, narrow design

Coupling relays with plug-in relays


Article number	3RQ41.8- .AB00, .AB30 .AB01 .AE00 .AE01 .AF00 .AF01 .AM00 .AM01									
General technical specifications										
Width x height x depth		mm	6.2 x 93 x 88.5							
Insulation voltage for overvoltage category III according to IEC 60664 for pollution degree 3	V	300								
Max. permissible voltage for protective separation between control circuit and auxiliary circuit	V	300								
Ambient temperature										
• During operation	°C	-25 ... +60								
• During storage	°C	-40 ... +85								
• During transport	°C	-40 ... +85								
Degree of protection IP	IP20									
Version of the fuse link required for short-circuit protection of the auxiliary switch	Fuse gG: 4 A									
Operational current of the auxiliary contacts										
• At AC-15										
- At 24 V	A	3								
- At 250 V	A	3								
• At DC-13										
- At 24 V	A	1								
- At 125 V	A	0.2								
- At 250 V	A	0.1								
Contact reliability of the auxiliary contacts (one contact failure per 100 million)			17 V, 5 mA	5 V, 1 mA	17 V, 5 mA	5 V, 1 mA	17 V, 5 mA	5 V, 1 mA	17 V, 5 mA	5 V, 1 mA
Mechanical endurance (operating cycles) typical	10 000 000									
Electrical endurance (operating cycles) for AC-15 at 250 V typical	100 000									
Operating range factor of the control supply voltage, rated value										
• At AC										
- At 50 Hz		0.8 ... 1.25	0.8 ... 1.1			--				
- At 60 Hz		0.8 ... 1.25	0.8 ... 1.1			--				
• At DC		0.85 ... 1.25		0.8 ... 1.1			0.8 ... 1.25			
Active power input	W	0.3		0.5			1.3		0.3	
Thermal current	A	6								

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

SIRIUS 3RQ4 coupling relays, narrow design **NEW**

Coupling relays with integrated semiconductor output

Article number	3RQ4050-.SM50, 3RQ4052-.SM40	3RQ4052-.SM30, 3RQ4055-.SM30, 3RQ4070-.SB30	3RQ4052-.SM50	3RQ4053-.SG30, 3RQ4070-.SG30
General technical specifications				
Width x height x depth	mm	6.2 x 93 x 84.5		
				
Insulation voltage for overvoltage category III according to IEC 60664 for pollution degree 3	V	100	300	
Ambient temperature				
• During operation	°C	-25 ... +60		
• During storage	°C	-40 ... +85		
• During transport	°C	-40 ... +85		
Degree of protection IP		IP20		
Switching voltage of the semiconductor output				
• At AC	V	--		20 ... 264
• At DC	V	10 ... 60	10 ... 30	--
Current-carrying capacity of the semiconductor output				
• At AC	A	--		0.005 ... 2
• At DC	A	0.001 ... 3	0.001 ... 6	--
Operating range factor of the control supply voltage, rated value				
• At AC				
- At 50 Hz		--		0.7 ... 1.1
- At 60 Hz		--		0.7 ... 1.1
• At DC		0.7 ... 1		0.7 ... 1.1
Active power input	W	0.2		0.5
Thermal current	A	3	6	2

Coupling relays

Article number	3RQ4...-1....	3RQ4...-2....
Type of electrical connection for auxiliary and control circuits	 Screw terminals	 Spring-loaded terminals (push-in)
Type of connectable conductor cross-sections		
• Solid	1x (0.25 ... 2.5 mm ²)	
• Finely stranded	--	
- Without end sleeve	--	1x (0.25 ... 2.5 mm ²)
- With end sleeve	1x (0.25 ... 2.5 mm ²), 2x (0.25 ... 1.5 mm ²)	1x (0.25 ... 1.5 mm ²)
• For AWG cables	--	
- Solid	1x (20 ... 14), 2x (20 ... 16)	1x (20 ... 14)
- Stranded	--	1x (20 ... 14)

Selection and ordering data

 PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41H


3RQ4018-1AB01



3RQ4118-2AB01

Type of voltage	Control supply voltage			Number of CO contacts for auxiliary contacts	Material of switching contacts	Operating mode selectable via switch position	Protective coating on printed circuit board	Screw terminals 		Spring-loaded terminals (push-in) 	
	at AC	at 50 Hz	at 60 Hz					at DC	Article No.	Price per PU	Article No.
	V	V	V	V							

Coupling relays with integrated relay output
Output coupling links

AC/DC	24	24	24	1	AgSnO2	--	No	3RQ4018-1AB00	3RQ4018-2AB00	
					AgSnO2	--	No	3RQ4018-1AB01	3RQ4018-2AB01	
					AgSnO2	hard gold-plated				
	115	115	115	1	AgSnO2	--	No	3RQ4018-1AE00	3RQ4018-2AE00	
	230	230	230	1	AgSnO2	--	No	3RQ4018-1AF00	3RQ4018-2AF00	
DC	--	--	24	1	AgSnO2	--	No	--	3RQ4018-2AM08-0AA0	
						AgSnO2	--	Yes	--	3RQ4018-2AM08-0AX0
						AgSnO2	--	No	--	3RQ4018-2AN08-0AA0
			110	1	AgSnO2	--	No	--	3RQ4018-2AN08-0AX0	
					AgSnO2	--	Yes	--	3RQ4018-2AN08-0AX0	

Input coupling links

AC/DC	24	24	24	1	AgSnO2	--	No	3RQ4038-1AB00	3RQ4038-2AB00
					AgSnO2	--	No	3RQ4038-1AB01	3RQ4038-2AB01
					AgSnO2	hard gold-plated			
	115	115	115	1	AgSnO2	--	No	3RQ4038-1AE00	3RQ4038-2AE00
					AgSnO2	--	No	3RQ4038-1AE01	3RQ4038-2AE01
					AgSnO2	hard gold-plated			
	230	230	230	1	AgSnO2	--	No	3RQ4038-1AF00	3RQ4038-2AF00
					AgSnO2	--	No	3RQ4038-1AF01	3RQ4038-2AF01
					AgSnO2	hard gold-plated			

Coupling relays with plug-in relays
Output coupling links

AC/DC	24	24	24	1	AgSnO2	--	No	3RQ4118-1AB00	3RQ4118-2AB00
					AgSnO2	--	No	3RQ4118-1AB01	3RQ4118-2AB01
					AgSnO2	Manual/Off/Automatic	No	3RQ4128-1AB30	3RQ4128-2AB30
	115	115	115	1	AgSnO2	--	No	3RQ4118-1AE00	3RQ4118-2AE00
					AgSnO2	--	No	3RQ4118-1AE01	3RQ4118-2AE01
					AgSnO2	hard gold-plated			
	230	230	230	1	AgSnO2	--	No	3RQ4118-1AF00	3RQ4118-2AF00
					AgSnO2	--	No	3RQ4118-1AF01	3RQ4118-2AF01
					AgSnO2	hard gold-plated			
DC	--	--	24	1	AgSnO2	--	No	3RQ4118-1AM00	3RQ4118-2AM00
						AgSnO2	--	No	3RQ4118-1AM01
					AgSnO2	hard gold-plated			

Note:

Other device versions with protective coating on the printed circuit board are available on request.

Switching devices – Contactors, contactor assemblies – Contactor relays, relays

Coupling relays



SIRIUS 3RQ4 coupling relays, narrow design **NEW**

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41H



3RQ4050-1SM50



3RQ4050-2SM50

Type of voltage	Control supply voltage			Current-carrying capacity of the semiconductor output		Screw terminals 		Spring-loaded terminals (push-in) 	
	at AC at 50 Hz	at 60 Hz	at DC	at AC	at DC	Article No.	Price per PU	Article No.	Price per PU
	V	V	V	A	A				

Coupling relays with integrated semiconductor output

Output coupling links

DC	--	--	11 ... 30	--	0.001 ... 3	3RQ4050-1SM50	3RQ4050-2SM50
					0.001 ... 6	3RQ4052-1SM30	3RQ4052-2SM30
					0.001 ... 3	3RQ4052-1SM40	3RQ4052-2SM40
					0.005 ... 2	3RQ4052-1SM50	3RQ4052-2SM50
					--	0.001 ... 6	3RQ4055-1SM30
AC/DC	110 ... 230	110 ... 230	110 ... 230	--	0.001 ... 6	3RQ4053-1SG30	3RQ4053-2SG30

Input coupling links

DC	--	--	11 ... 30	--	0.001 ... 6	3RQ4070-1SB30	3RQ4070-2SB30
AC/DC	110 ... 230	110 ... 230	110 ... 230	--	0.001 ... 6	3RQ4070-1SG30	3RQ4070-2SG30

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Overview

More information

Homepage, see www.siemens.com/sirius-coupling-relays

SiePortal, see www.siemens.com/product_catalog_siep?3RQ_3RS_LZ

TIA Selection Tool Cloud (TST Cloud), see www.siemens.com/tstcloud/?node=SIRIUSRelais

LZS coupling relays with plug-in relays can be ordered as complete units or as single modules for customer assembly.

Function

The coupling relays with semiconductor output have low power consumption and are therefore particularly well-suited to solid-state systems. In the versions equipped with LEDs, these indicate the switching state. The LZS:PT coupling relays have a test button. This can be used to force the relays into the switching state and to lock it without electrical control. This is indicated by a raised petrol-colored lever.

Control with solid-state output

In the case of solid-state outputs (e.g. proximity switch) with overload and short-circuit protection, you must make allowance during configuration for the temporarily flowing capacitor charging currents! This is possible, for example, by using a suitable LZS coupling relay with plug-in relay.

Surge suppression

The 24 V DC relays LZX:RT and LZX:PT with LEDs can be supplied with, all others without integral surge suppression (freewheeling diode connected in parallel with A1/A2). The positive control supply voltage must be connected to coil terminal A1.

Mounting

The relays are plugged into the base and this is snapped onto a TH 35 DIN rail according to IEC 60715.

For the RT and PT series, a combined fixing/ejection bracket is available which can be used to disassemble the relay where access is difficult, for example, in side-by-side design.

They can be mounted as required.

Logical separation

The terminals for the contacts and the terminals for the coil are arranged on separate levels, e.g. above for contacts and below for coil. Logical separation is not necessarily protective separation.

Protective separation

For protective separation, transfer of the voltage of one circuit to another circuit is prevented to a suitable degree of safety (requirements and tests are described in IEC 60947-1 in Annex N).

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays


LZS coupling relays with plug-in relays

Technical specifications

More information

Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/16204/tid>

Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/16204/man>

Relay type		LZX:RT print relays, 8-pole, (12.7 mm) 1 CO/2 CO				LZX:PT industrial relays, 8-, 11- and 14-pole, (22.5 mm) 2 CO/3 CO/4 CO			
General data									
Dimensions (W x H x D)									
<ul style="list-style-type: none"> LZS:RT.A4/LZS:PT.A5 LZS:RT.B4/LZS:PT.B5 LZS:RT.D4/LZS:PT.D5 		mm	15.5 x 78 x 71				28 x 74 x 72		
		mm	15.5 x 77 x 71				28 x 77 x 79		
		mm	15.5 x 98 x 71				28 x 98 x 79		
Rated control supply voltage U_c¹⁾	V	24 DC	24 AC	115 AC	230 AC	24 DC	24 AC	115 AC	230 AC
Rated insulation voltage U_i (pollution degree 3)	V	250							
Overvoltage category according to IEC 60664-1		III							
Protective separation between coil and contacts according to IEC 60947-1, Annex N		Up to 250 V (with plug-in socket LZS:RT78726) No (for complete units with standard socket)				No			
Degree of protection		IP67				IP50			
		IP20							
Permissible ambient temperature									
• During operation	°C	-40 ... +70							
• During storage	°C	-40 ... +80							
Conductor cross-sections									
Connection type		 Screw terminals							
• Solid	mm ²	2 x 2.5							
• Finely stranded with end sleeve	mm ²	2 x 1.5							
• Corresponding opening tool		Screwdriver, size 3.0 ... 3.5 mm x 0.5 mm (3RA2908-1A)							
Connection type		 Spring-loaded terminals (push-in)							
• Solid	mm ²	1 x (0.75 ... 1.5), 2 x (0.75 ... 1.0), 2 x 1.5							
• Finely stranded without end sleeve	mm ²	1 x (0.75 ... 1.5), 2 x (0.75 ... 1.0), 2 x 1.5							
• Finely stranded with end sleeve	mm ²	1 x (0.75 ... 1.0), 2 x 0.75, 1 x 1.5							

¹⁾ AC voltages, 50 Hz; for 60 Hz operation, the lower response value must be increased by 10%; the power loss will decrease slightly.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Relay type		LZX:RT print relays, 8-pole, (12.7 mm) 1 CO/2 CO				LZX:PT industrial relays, 8-, 11- and 14-pole, (22.5 mm) 2 CO/3 CO/4 CO			
Rated control supply voltage U_c ¹⁾		24 DC	24 AC	115 AC	230 AC	24 DC	24 AC	115 AC	230 AC
Control side									
Operating range factor		0.9 ... 1.4		0.9 ... 1.1		0.9 ... 1.4		0.9 ... 1.1	
Power consumption at U_c									
• AC	VA	--	0.75			--	1		
• DC	W	0.4	--			0.75	--		
Release voltage		2.4	3.6	17.3	34.5	2.4	7.2	34.5	69
Protective circuit		Freewheeling diode for complete unit				Freewheeling diode in LED module			
Load side									
Switching voltage									
AC/DC	V	24 ... 250							
Rated currents²⁾									
• Conventional thermal current I_{th}									
- 1 CO contact	A	16				--			
- 2 CO contacts	A	8				12			
- 3 CO contacts	A	--				10			
- 4 CO contacts	A	--				6			
• Rated operational current I_e AC-15 according to utilization categories (IEC 60947-5-1)									
- 1 CO contact	A	6	3			4	2		
- 2 CO contacts	A	3				4	2		
- 3 CO contacts	A	--				4	2		
- 4 CO contacts	A	--				4	2		
• Rated operational current I_e DC-13 with suppressor diode according to utilization categories (IEC 60947-5-1)		2 at 24 V, 0.27 at 230 V				PT2, PT3, PT5: 4 at 24 V, 0.5 at 230 V			
Short-circuit protection									
Short-circuit test with fuse links of operational class gG with short-circuit current $I_k = 1$ kA according to IEC 60947-5-1									
• DIAZED, type 5SB	A	10				6			
Minimum contact load (reliability: 1 ppm)		Standard 17 V, 10 mA; hard gold-plated 17 V/0.1 mA				Standard 17 V, 10 mA; hard gold-plated 20 V/1 mA			
Mechanical endurance									
• 1 CO contact	Operating cycles	30 x 10 ⁶	10 x 10 ⁶	1 x 10 ⁵	7 x 10 ⁴	30 x 10 ⁶	20 x 10 ⁶		
• 2 CO contacts	Operating cycles	30 x 10 ⁶	5 x 10 ⁶	1 x 10 ⁵	8 x 10 ⁴	30 x 10 ⁶	20 x 10 ⁶		
• 3 CO contacts	Operating cycles	--				30 x 10 ⁶	20 x 10 ⁶		
• 4 CO contacts	Operating cycles	--				30 x 10 ⁶	20 x 10 ⁶		
Electrical endurance (resistive load at 250 V AC)									
• 1 CO contact	Operating cycles	1 x 10 ⁵	7 x 10 ⁴			--			
• 2 CO contacts	Operating cycles	1 x 10 ⁵	8 x 10 ⁴			180 x 10 ³			
• 3 CO contacts	Operating cycles	--				180 x 10 ³			
• 4 CO contacts	Operating cycles	--				250 x 10 ³			

¹⁾ AC voltages, 50 Hz; for 60 Hz operation, the lower response value must be increased by 10%; the power loss will decrease slightly.

²⁾ Capacitive loads can result in micro-welding on the contacts.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Selection and ordering data

Version	Rated control supply voltage U_c at 50/60 Hz AC	Contacts, number of CO contacts	Width	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	V		mm					

Complete units, 11- and 14-pole, PT series



LZS:PT3A5L24,
LZS:PT3A5L24A

Complete units with plug-in socket

For snap-on mounting on TH 35 DIN rail

Comprising:

- Coupling relay with plug-in relay
- Standard plug-in socket with screw terminals
- Fixing/ejection bracket
- Labeling plate

LED modules, red

(24 V DC version: LED module with freewheeling diode)

3 CO contacts	24 DC	3	28
	24 AC		
	115 AC		
	230 AC		
4 CO contacts	24 DC	4	28
	24 AC		
	115 AC		
	230 AC		

LED modules, green, with freewheeling diode **NEW**

3 CO contacts	24 DC	3	28
4 CO contacts	24 DC	4	28

Screw terminals



LZS:PT3A5L24	1	5 units	41H
LZS:PT3A5R24	1	5 units	41H
LZS:PT3A5S15	1	5 units	41H
LZS:PT3A5T30	1	5 units	41H
LZS:PT5A5L24	1	5 units	41H
LZS:PT5A5R24	1	5 units	41H
LZS:PT5A5S15	1	5 units	41H
LZS:PT5A5T30	1	5 units	41H

LZS:PT3A5L24A	1	5 units	41H
LZS:PT5A5L24A	1	5 units	41H



LZS:PT5B5L24,
LZS:PT5B5L24A

Complete units with plug-in socket with logical separation

For snap-on mounting on TH 35 DIN rail

Comprising:

- Coupling relay with plug-in relay
- Plug-in socket with logical separation and screw terminals
- Fixing/ejection bracket
- Labeling plate

LED modules, red

(24 V DC version: LED module with freewheeling diode)

4 CO contacts	24 DC	4	28
	24 AC		
	115 AC		
	230 AC		

LED modules, green, with freewheeling diode **NEW**

4 CO contacts	24 DC	4	28
---------------	-------	---	----

Spring-loaded terminals (push-in)



LZS:PT2D5L24	1	5 units	41H
LZS:PT2D5T30	1	5 units	41H
LZS:PT5D5L24	1	5 units	41H
LZS:PT5D5R24	1	5 units	41H
LZS:PT5D5S15	1	5 units	41H
LZS:PT5D5T30	1	5 units	41H

LZS:PT2D5L24A	1	5 units	41H
LZS:PT5D5L24A	1	5 units	41H

Complete units, 8- and 14-pole, PT series



LZS:PT2D5L24,
LZS:PT2D5L24A

Complete units with plug-in socket with logical separation

For snap-on mounting on TH 35 DIN rail

Comprising:

- Coupling relay with plug-in relay
- Plug-in socket with logical separation and spring-loaded terminals (push-in)
- Fixing/ejection bracket
- Labeling plate

LED modules, red

(24 V DC version: LED module with freewheeling diode)

2 CO contacts	24 DC	2	28
	230 AC		
4 CO contacts	24 DC	4	28
	24 AC		
	115 AC		
	230 AC		

LED modules, green, with freewheeling diode **NEW**

2 CO contacts	24 DC	2	28
4 CO contacts	24 DC	4	28

Note:

Logical separation: The terminals for the contacts and the terminals for the coil are arranged on separate levels, e.g. above for contacts and below for the coil. Logical separation is not necessarily protective separation.

Protective separation: Protective separation prevents voltage of one circuit affecting another circuit with sufficient protection (IEC 61140).

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Version	Rated control supply voltage U_c at AC 50/60 Hz	Contacts, number of CO contacts	Width	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	V		mm					

Single modules for customer assembly, PT series

Industrial relays, 8-, 11-, and 14-pole

Mini industrial relays

- With test bracket and mechanical switch position indicator, without LED¹⁾



LZX:PT270024

24 DC	2	22.5	LZX:PT270024	1	1 unit	41H
	3		LZX:PT370024	1	1 unit	41H
	4		LZX:PT570024	1	1 unit	41H
24 AC	2	22.5	LZX:PT270524	1	1 unit	41H
	3		LZX:PT370524	1	1 unit	41H
	4		LZX:PT570524	1	1 unit	41H
115 AC	2	22.5	LZX:PT270615	1	1 unit	41H
	3		LZX:PT370615	1	1 unit	41H
	4		LZX:PT570615	1	1 unit	41H
230 AC	2	22.5	LZX:PT270730	1	1 unit	41H
	3		LZX:PT370730	1	1 unit	41H
	4		LZX:PT570730	1	1 unit	41H
24 DC 230 AC	4	22.5	LZX:PT580024	1	1 unit	41H
			LZX:PT580730	1	1 unit	41H
24 DC 230 AC	4	22.5	LZX:PT520024	1	1 unit	41H
			LZX:PT520730	1	1 unit	41H

- With hard gold-plating

- Without test bracket

Plug-in sockets for PT relays

Standard plug-in sockets

For mounting on TH 35 DIN rail



LZS:PT78720

		Screw terminals 				
--	2	28	LZS:PT78720	1	1 unit	41H
	3		LZS:PT78730	1	1 unit	41H
	4		LZS:PT78740	1	1 unit	41H

Plug-in sockets with logical separation

For mounting on TH 35 DIN rail



LZS:PT78742

--	2	28	LZS:PT78722	1	1 unit	41H
	4		LZS:PT78742	1	1 unit	41H

Plug-in sockets with logical separation

For mounting on TH 35 DIN rail



LZS:PT7874P

		Spring-loaded terminals (push-in) 				
--	2	28	LZS:PT7872P	1	1 unit	41H
	4		LZS:PT7874P	1	1 unit	41H

¹⁾ The test bracket is designed to be non-latching. If the test bracket is pressed further until 90° has been reached, two small lugs break off and the test bracket can be latched in position.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Version	Rated control supply voltage U_c at AC 50/60 Hz	Width	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
	V	mm						
Single modules for customer assembly, PT series (continued)								
More single modules								
LED modules								
 LZS:PTML0024	• Red							
	- With freewheeling diode	24 DC	11.4	LZS:PTML0024	1	1 unit	41H	
	- Without freewheeling diode	24 AC/DC 110 ... 230 AC		LZS:PTML0524	1	1 unit	41H	
				LZS:PTML0730	1	1 unit	41H	
	• Green							
	- With freewheeling diode	24 DC	11.4	LZS:PTMG0024	1	1 unit	41H	
- Without freewheeling diode	24 AC/DC 110 ... 230 AC		LZS:PTMG0524	1	1 unit	41H		
			LZS:PTMG0730	1	1 unit	41H		
Fixing/ejection brackets for PT base with logical separation								
 LZS:PT17021	Screw terminals and spring-loaded terminals	--	27	LZS:PT17021	100	10 units	41H	
Fixing/ejection brackets for standard plug-in socket without logical separation								
 LZS:PT17024	Screw terminals	--	27	LZS:PT17024	100	10 units	41H	
Labeling plates for PT relays								
 LZS:PT17040	--		26.5	LZS:PT17040	100	10 units	41H	
RC elements								
 LZS:PTMU0730		24 ... 48 AC 110 ... 230 AC	11.4	LZS:PTMU0524	1	1 unit	41H	
				LZS:PTMU0730	1	1 unit	41H	
Freewheeling diode with connection to A1								
		6 ... 230 DC	11.4	LZS:PTMT00A0	1	1 unit	41H	
Connecting combs for PT screw base								
 LZS:PT170R6	6-pole, 10 A current-carrying capacity, natural-colored	--	103.6	LZS:PT170R6	1	10 units	41H	
Connecting brackets for PT push-in base								
 LZS:PT170P1	2-pole, 10 A current-carrying capacity, natural-colored	--	28	LZS:PT170P1	1	10 units	41H	

Note:

SITOP DC power supplies such as 6EP1331-5BA00 or 6EP1331-5BA10 can be used for unavailable coil voltages; see page 15/1 or Catalog KT 10.1.

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Version	Rated control supply voltage U_c at AC 50/60 Hz	Contacts, number of CO contacts	Width	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG						
	V		mm											
Complete units, 8-pole, 5 mm pinning, RT series														
 <p>LZS:RT.A4L24, LZS:RT.A4L24A</p>	Complete units with standard plug-in socket			Screw terminals 										
	For snap-on mounting on TH 35 DIN rail													
	Comprising:													
	<ul style="list-style-type: none"> • Coupling relay with plug-in relay • Standard plug-in socket with screw terminals • Fixing/ejection bracket • Labeling plate 													
	<u>LED modules, red</u>													
	(24 V DC version: LED module with freewheeling diode)													
	1 CO contact	24 DC 24 AC 115 AC 230 AC	1	15.5	LZS:RT3A4L24 LZS:RT3A4R24 LZS:RT3A4S15 LZS:RT3A4T30		1 5 units	41H						
	2 CO contacts	24 DC 24 AC 115 AC 230 AC	2	15.5	LZS:RT4A4L24 LZS:RT4A4R24 LZS:RT4A4S15 LZS:RT4A4T30		1 5 units	41H						
	<u>LED modules, green, with freewheeling diode</u> NEW													
	1 CO contact	24 DC	1	15.5	LZS:RT3A4L24A		1 5 units	41H						
2 CO contacts	24 DC	2	15.5	LZS:RT4A4L24A		1 5 units	41H							
 <p>LZS:RT.B4L24, LZS:RT.B4L24A</p>	Complete units with plug-in socket with logical separation													
	For snap-on mounting on TH 35 DIN rail													
	Comprising:													
	<ul style="list-style-type: none"> • Coupling relay with plug-in relay • Plug-in socket with logical separation and screw terminals • Fixing/ejection bracket • Labeling plate 													
	<u>LED modules, red</u>													
	(24 V DC version: LED module with freewheeling diode)													
	1 CO contact	24 DC 24 AC 115 AC 230 AC	1						15.5	LZS:RT3B4L24 LZS:RT3B4R24 LZS:RT3B4S15 LZS:RT3B4T30		1 5 units	41H	
	2 CO contacts	24 DC 24 AC 115 AC 230 AC	2						15.5	LZS:RT4B4L24 LZS:RT4B4R24 LZS:RT4B4S15 LZS:RT4B4T30		1 5 units	41H	
	<u>LED modules, green, with freewheeling diode</u> NEW													
	1 CO contact	24 DC	1						15.5	LZS:RT3B4L24A		1 5 units	41H	
2 CO contacts	24 DC	2	15.5	LZS:RT4B4L24A		1 5 units	41H							
 <p>LZS:RT.D4L24, LZS:RT.D4L24A</p>	Complete units with plug-in socket with logical separation			Spring-loaded terminals (push-in) 										
	For snap-on mounting on TH 35 DIN rail													
	Comprising:													
	<ul style="list-style-type: none"> • Coupling relay with plug-in relay • Plug-in socket with logical separation and spring-loaded terminals (push-in) • Fixing/ejection bracket • Labeling plate 													
	<u>LED modules, red</u>													
	(24 V DC version: LED module with freewheeling diode)													
	1 CO contact	24 DC 24 AC 115 AC 230 AC	1	15.5	LZS:RT3D4L24 LZS:RT3D4R24 LZS:RT3D4S15 LZS:RT3D4T30		1 5 units	41H						
	2 CO contacts	24 DC 24 AC 115 AC 230 AC	2	15.5	LZS:RT4D4L24 LZS:RT4D4R24 LZS:RT4D4S15 LZS:RT4D4T30		1 5 units	41H						
	<u>LED modules, green, with freewheeling diode</u> NEW													
	1 CO contact	24 DC	1	15.5	LZS:RT3D4L24A		1 5 units	41H						
2 CO contacts	24 DC	2	15.5	LZS:RT4D4L24A		1 5 units	41H							

Note:

Logical separation: The terminals for the contacts and the terminals for the coil are arranged on separate levels, e.g. above for contacts and below for the coil. Logical separation is not necessarily protective separation.

Protective separation: Protective separation prevents voltage of one circuit affecting another circuit with sufficient protection (IEC 61140).

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Version	Rated control supply voltage U_c at AC 50/60 Hz	Contacts, number of CO contacts	Width	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
---------	---	---------------------------------	-------	-------------	--------------	-------------------	-----	----

V

mm

Single modules for customer assembly, RT series

Print relays, 8-pole, 5 mm pinning

Print relays

With hard gold-plating

- Version with 1 CO contact

24 DC
230 AC

1

12.7

LZX:RT315024
LZX:RT315730

1

1 unit

41H

1

1 unit

41H

Print relays

- Version with 1 CO contact

24 DC
24 AC
115 AC
230 AC

1

12.7

LZX:RT314024
LZX:RT314524
LZX:RT314615
LZX:RT314730

1

1 unit

41H

1

1 unit

41H

1

1 unit

41H

1

1 unit

41H

- Version with 2 CO contacts

12 DC
24 DC
24 AC
115 AC
230 AC

2

12.7

LZX:RT424012
LZX:RT424024
LZX:RT424524
LZX:RT424615
LZX:RT424730

1

1 unit

41H

Plug-in sockets for RT relays

Standard plug-in socket

For mounting on TH 35 DIN rail

--

--

15.5

Screw terminals



LZS:RT78725

1

1 unit

41H

Plug-in socket with logical separation

For mounting on TH 35 DIN rail

--

--

15.5

LZS:RT78726

1

1 unit

41H

Plug-in socket with logical separation

For mounting on TH 35 DIN rail

--

--

15.5

Spring-loaded terminals (push-in)



LZS:RT7872P

1

1 unit

41H

LZX:RT31...,
LZX:RT424...

LZS:RT78725



LZS:RT78726



LZS:RT7872P

5

Switching devices – Contactors and contactor assemblies – Contactor relays and relays

Coupling relays

LZS coupling relays with plug-in relays

Version	Rated control supply voltage U_c at AC 50/60 Hz	Contacts, number of CO contacts	Width	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	V		mm					

Single modules for customer assembly, RT series (continued)

More single modules

LED modules

• Red

- With freewheeling diode	24 DC	--	11.4	LZS:PTML0024		1	1 unit	41H
- Without freewheeling diode	24 AC/DC 110 ... 230 AC	--		LZS:PTML0524 LZS:PTML0730		1 1	1 unit 1 unit	41H 41H

• Green

- With freewheeling diode	24 DC	--	11.4	LZS:PTMG0024		1	1 unit	41H
- Without freewheeling diode	24 AC/DC 110 ... 230 AC	--		LZS:PTMG0524 LZS:PTMG0730		1 1	1 unit 1 unit	41H 41H

Fixing/ejection brackets for RT base

--	--	--	15.5	LZS:RT17016		100	10 units	41H
----	----	----	------	--------------------	--	-----	----------	-----

Labeling plates for RT relays

--	--	--	15	LZS:RT17040		100	10 units	41H
----	----	----	----	--------------------	--	-----	----------	-----

RC elements

24 ... 48 AC 110 ... 230 AC	--	--	11.4	LZS:PTMU0524 LZS:PTMU0730		1 1	1 unit 1 unit	41H 41H
--------------------------------	----	----	------	--	--	--------	------------------	------------

Freewheeling diode with connection to A1

6 ... 230 DC	--	--	11.4	LZS:PTMT00A0		1	1 unit	41H
--------------	----	----	------	---------------------	--	---	--------	-----

Connecting combs for RT screw base

8-pole, 10 A current-carrying capacity, natural-colored	--	--	118.8	LZS:RT170R8		1	10 units	41H
---	----	----	-------	--------------------	--	---	----------	-----

Connecting brackets for RT push-in base

2-pole, 10 A current-carrying capacity, natural-colored	--	--	15.5	LZS:RT170P1		100	10 units	41H
---	----	----	------	--------------------	--	-----	----------	-----

Note:

SITOP DC power supplies such as 6EP1331-5BA00 or 6EP1331-5BA10 can be used for unavailable coil voltages; see page 15/1 or Catalog KT 10.1.



LZS:PTML0024



LZS:RT17016



LZS:RT17040



LZS:PTMU0730



LZS:RT170R8



LZS:RT170P1