

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Overview



SIMATIC ET 200AL video

https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6141316253001



Highlights

- Compact dimensions
- Low weight
- Safety-related collective shutdown of the outputs
- High degree of user-friendliness due to the following design features:
 - Flexible mounting in all positions possible due to screw fastening through the front or side
 - Direct installation on even surfaces or aluminum DIN rails
 - Labels for the identification of channels, modules and slots
 - Integrated cable tie opening
 - Clear and CAx-compliant interface designations
 - Uniform coloring of the system interfaces and system cables
 - 1:1 assignment of channel status LED, I/O socket and labeling strip
 - Pin assignment on the side
- I/O module portfolio comprising digital and analog modules, digital fail-safe module, IO-Link communications module and IO-Link I/O modules
- Ambient temperature range from -30 °C/-25 °C to +55 °C
- Extensive system functions
 - All interface and I/O modules support firmware update
 - Configuration control (option handling) via user software
 - System support of PROFlenergy for power saving purposes
 - Consistent use of identification and maintenance data IM0 to IM3/4 (electronic rating plate) for fast electronic and unambiguous identification of individual modules (Article No., serial number, etc.).

- Modular, distributed I/O system with compact I/O modules in IP65/67.
- Especially easy and flexible installation, even in extremely confined spaces.
- Easy wiring
- Easy commissioning
- SIMATIC ET 200AL consists of the following components:
 - Interface module for communication with IO controllers using the Ethernet-based protocols PROFINET, EtherNet/IP and Modbus TCP (MultiFieldbus).
 - Interface module for communication with IO controllers on PROFINET.
 - Interface module for communication with all masters on the PROFIBUS.
 - BusAdapter for connection to the ET 200SP I/O system.
 - Various I/O modules, 30 mm and 45 mm wide.
 - IO-Link I/O modules for connection to IO-Link Master
- Maximum configuration of an ET 200AL station:
 - Up to 32 I/O modules with PROFINET or PROFIBUS in any combination
 - Up to 16 I/O modules at the ET 200SP I/O system in any combination
- Connection of the modules via an internal backplane bus established using bus cables (ET connection).

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Interface modules > IM 157-1 MF

Overview



- Multi-protocol capability:
Operation of the ET 200AL interface module on Ethernet controllers via the PROFINET, EtherNet/IP and Modbus TCP protocols
- Max. 32 I/O modules can be connected
- Max. data volume of 1440 bytes, for input and output data respectively (depends on protocol)
- Shortest bus cycle time 250 µs (depends on protocol)
- Automatic start-up by means of topology discovery (depends on protocol)
- Shared device:

Simultaneous access from different controllers via different Ethernet protocols PROFINET, EtherNet/IP and Modbus TCP

- Local data links:

Deterministic, easy-to-configure data exchange between controllers, also via different Ethernet protocols PROFINET, EtherNet/IP and Modbus TCP

- S2 system redundancy
- Support for the MRP (media redundancy protocol) and MRPD (media redundancy with planned duplication) functions
- Identification and maintenance data IMO ... IM4
- Autocrossover
- Firmware update
- Configuration management (option handling)
- PROFIenergy
- Security functions

Ordering data

Article No.

IM 157-1 MF interface module

For connecting ET 200AL to PROFINET

6ES7157-1MA00-0AB0

Accessories

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 plugs

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends,
2 M8 plugs, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 plug

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Article No.

M8 power cable

4-pin

Pre-assembled at both ends,
M8 plug and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends,
angled M8 plug and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Interface modules > IM 157-1 MF

Ordering data	Article No.		Article No.
M8 plug for ET connection 4-pin, shielded	6ES7194-2AB00-0AA0	ET connection FastConnect stripping tool Stripping tool for stripping the ET connection bus cable	6ES7194-2KA00-0AA0
M8 power connector Male contact insert, 4-pin Female contact insert, 4-pin	6ES7194-2AA00-0AA0 6ES7194-2AC00-0AA0	Labels 10 x 5 mm, RAL 9016; 5 frames with 40 labels each	6ES7194-2BA00-0AA0

Technical specifications

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF	Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
General information		Interface types	
Product type designation	IM 157-1 MF	M12 port	
Product function		• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• I&M data	Yes; I&M0 to I&M4	• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Isochronous mode	No	• Autonegotiation	Yes
• IRT	Yes	• Autocrossing	Yes
Engineering with		Protocols	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V19 or higher	Supports protocol for PROFINET IO	Yes
• STEP 7 configurable/integrated from version	from V5.6	PROFIsafe	No
• PROFINET from GSD version/GSD revision	GSDML V2.4.x	PROFIBUS	No
• Multi Fieldbus Configuration Tool (MFCT)	from V1.5	EtherNet/IP	Yes
Supply voltage		Modbus TCP	Yes
Load voltage 1L+		PROFINET IO Device	
• Rated value (DC)	24 V	Services	
• Reverse polarity protection	Yes; against destruction	- IRT	Yes; 250 µs, 500 µs, 1 ms, 2 ms, 4 ms, 8 ms, 16 ms, 32 ms, 64 ms, 128 ms
Input current		- PROFIenergy	Yes
Current consumption (rated value)	80 mA	- Shared device	Yes
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value	- Number of IO Controllers with shared device, max.	14; 4x PN controller + 2x EtherNet/IP scanner + 10x Modbus TCP master
from load voltage 2L+, max.	4 A; Maximum value	Redundancy mode	
Address area		• PROFINET system redundancy (S2)	Yes
Address space per module		- on S7-1500R/H	Yes
• Address space per module, max.	264 byte; For input and output data respectively	- on S7-400H	Yes
Address space per station		• PROFINET system redundancy (R1)	No
• Address space per station, max.	1 440 byte	• H-Sync forwarding	Yes
Hardware configuration		Media redundancy	
Submodules		- MRP	Yes
• Number of submodules per station, max.	125	- MRPD	Yes
Interfaces		EtherNet/IP	
Number of PROFINET interfaces	1; 2 ports (switch)	Services	
1. Interface		- CIP Implicit Messaging	Yes
Interface type	PROFINET	- CIP Explicit Messaging	Yes
Interface types		- CIP Safety	No
• M12 port	Yes; 2x M12 D-coded	- Configuration control via Explicit Messaging	No
• integrated switch	Yes	- Shared device	Yes; 4x PN controller + 2x EtherNet/IP scanner + 10x Modbus TCP master
Protocols		- Number of scanners with shared device, max.	2
• PROFINET IO Device	Yes	Updating times	
• Open IE communication	Yes	- Requested Packet Interval (RPI)	2 ms
		Redundancy mode	
		- DLR (Device Level Ring)	No
		Address area	
		- Address space per module, max.	264 byte
		- ForwardOpen (Class1 & 32 bit Header)	500 byte
		- LargeForwardOpen (Class3)	4 002 byte

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Interface modules > IM 157-1 MF

Technical specifications

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
Modbus TCP	
Services	
- read coils (code=1)	Yes
- read discrete inputs (code=2)	Yes
- Read Holding Registers (Code=3)	Yes
- Read Input Register (Code=4)	Yes
- write single coil (code=5)	Yes
- Write Single Register (Code=6)	Yes
- write multiple coils (code=15)	Yes
- Write Multiple Registers (Code=16)	Yes
- Read/Write Multiple Registers (Code=23)	Yes
- Parameter change by master	Yes
- Modbus TCP Security Protocol	No
Address space per station	
- Address space per station, max.	500 byte; (246 byte outputs / 500 byte inputs)
- Access-consistent address space	250 byte; (246 byte outputs / 250 byte inputs)
Updating time	
- I/O request interval	2 ms
Connections	
- number of connections per device	9; (1x inputs / 2x outputs / 4x volatile registers / 2x Device Info)
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
• ARP	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs
• Connection display LINK TX/RX	Yes; 2x green LED

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
Potential separation	
between the load voltages	Yes
between PROFINET and all other circuits	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Product functions / security	
PROFINET Security Class	1
signed firmware update	Yes
Secure Boot	Yes
safely removing data	Yes
data integrity	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	215 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Interface modules > IM 157-1 PN

Overview



- Interface module for connecting ET 200AL to PROFINET
- Handles data exchange with the PROFINET I/O controller in the PLC
- Max. 32 I/O modules can be connected
- Max. data volume of 1430 bytes, for input and output data respectively
- Shortest bus cycle 250 µs
- Automatic power-up by means of topology recognition
- Autocrossover
- Shared device on up to 4 IO controllers
- Support for the MRP (media redundancy protocol) and MRPD (media redundancy with planned duplication) functions
- Identification and maintenance data IM0 ... IM4
- Firmware update
- Configuration management (option handling)
- PROFIenergy

Ordering data

IM 157-1 PN interface module
For connecting ET 200AL to PROFINET

Article No.

6ES7157-1AB00-0AB0

Accessories

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Power cable M8

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 connector for ET connection

4-pin, shielded

6ES7194-2AB00-0AA0

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect stripping tool

Stripping tool for stripping the
ET connection bus cable

6ES7194-2KA00-0AA0

Labels

10 x 5 mm, RAL 9016; 5 frames with
40 labels each

6ES7194-2BA00-0AA0

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Interface modules > IM 157-1 PN

Technical specifications

Article number	6ES7157-1AB00-0AB0 ET 200AL, IM 157-1 PN
General information	
Product type designation	IM 157-1 PN
Product function	
• I&M data	Yes; I&M0 to I&M4
• Isochronous mode	No
• IRT	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value)	100 mA
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Address area	
Address space per station	
• Address space per station, max.	1 430 byte
Interfaces	
Number of PROFINET interfaces	1
1. Interface	
Interface type	PROFINET
Interface types	
• M12 port	Yes; 2x M12 D-coded
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
Interface types	
M12 port	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 10 Mbps	Yes; for Ethernet services
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
Supports protocol for PROFINET IO	Yes
PROFIsafe	No
PROFIBUS	No
EtherNet/IP	No
PROFINET IO Device	
Services	
- IRT	Yes; 250 µs, 500 µs, 1 ms, 2 ms, 4 ms, 8 ms, 16 ms, 32 ms, 64 ms, 128 ms
- PROFIenergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4

Article number	6ES7157-1AB00-0AB0 ET 200AL, IM 157-1 PN
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Connection display LINK TX/RX	Yes; 2x green LED
Potential separation	
between the load voltages	Yes
between PROFINET and all other circuits	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	55 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	263 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Interface modules > IM 157-1 DP

Overview



- Interface module for connecting ET 200AL to PROFIBUS
- As DPV1 slave it handles the data exchange with the PROFIBUS master in the PLC
- Max. 32 I/O modules can be connected
- Max. data volume of 244 bytes, for input and output data respectively
- Automatic detection of baud rate 9.6 kBd ... 12 MBd
- PROFIBUS addresses 1 ... 99; can be set by means of rotary switch
- Identification and maintenance data IM0 ... IM3
- Firmware update
- Configuration management (option handling)

Ordering data

IM 157-1 DP interface module

For connecting ET 200AL to PROFIBUS

Accessories

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at one end,
1 M8 connector

2 m

5 m

10 m

15 m

Article No.

6ES7157-1AA00-0AB0

6ES7194-2LH02-0AA0

6ES7194-2LH03-0AA0

6ES7194-2LH10-0AA0

6ES7194-2LH20-0AA0

6ES7194-2LH50-0AA0

6ES7194-2LN10-0AA0

6ES7194-2LN15-0AA0

6ES7194-2LH03-0AB0

6ES7194-2LH10-0AB0

6ES7194-2LH20-0AB0

6ES7194-2LH50-0AB0

6ES7194-2LN10-0AB0

6ES7194-2LN15-0AB0

6ES7194-2LH20-0AC0

6ES7194-2LH50-0AC0

6ES7194-2LN10-0AC0

6ES7194-2LN15-0AC0

Article No.

M8 power cable

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at one end,
M8 socket

2 m

5 m

10 m

15 m

M8 connector for ET connection

4-pin, shielded

M8 power connector

Male contact insert, 4-pin

Female contact insert, 4-pin

ET connection FastConnect Stripping Tool

Stripping tool for stripping the
ET connection bus cable

Labels

10 x 5 mm, RAL 9016; 5 frames with
40 labels each

6ES7194-2LH02-1AA0

6ES7194-2LH03-1AA0

6ES7194-2LH10-1AA0

6ES7194-2LH20-1AA0

6ES7194-2LH50-1AA0

6ES7194-2LN10-1AA0

6ES7194-2LN15-1AA0

6ES7194-2LH03-1AB0

6ES7194-2LH10-1AB0

6ES7194-2LH20-1AB0

6ES7194-2LH50-1AB0

6ES7194-2LN10-1AB0

6ES7194-2LN15-1AB0

6ES7194-2LH20-1AC0

6ES7194-2LH50-1AC0

6ES7194-2LN10-1AC0

6ES7194-2LN15-1AC0

6ES7194-2AB00-0AA0

6ES7194-2AA00-0AA0

6ES7194-2AC00-0AA0

6ES7194-2KA00-0AA0

6ES7194-2BA00-0AA0

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Interface modules > IM 157-1 DP

Technical specifications

Article number	6ES7157-1AA00-0AB0 ET 200AL, IM 157-1 DP
General information	
Product type designation	IM 157-1 DP
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value)	50 mA
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Address area	
Address space per station	
• Address space per station, max.	244 byte
Interfaces	
Number of PROFIBUS interfaces	1
1. Interface	
Interface type	PROFIBUS DP
Interface types	
• RS 485	Yes
• M12 port	Yes; 2x M12 B-coded
Protocols	
• PROFIBUS DP device	Yes
Interface types	
RS 485	
• Transmission rate, max.	12 Mbit/s
Protocols	
Supports protocol for PROFINET IO	No
PROFIsafe	No
PROFIBUS	Yes
EtherNet/IP	No
PROFIBUS DP	
Services	
- SYNC capability	Yes
- FREEZE capability	Yes
- Direct data exchange (slave-to-slave communication)	Yes
- DPV0	Yes
- DPV1	Yes


Article number	6ES7157-1AA00-0AB0 ET 200AL, IM 157-1 DP
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Connection display DP	Yes; green LED
Potential separation	
between the load voltages	Yes
between PROFIBUS DP and all other circuit components	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	46 mm
Weights	
Weight, approx.	211 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Digital I/O modules

Overview

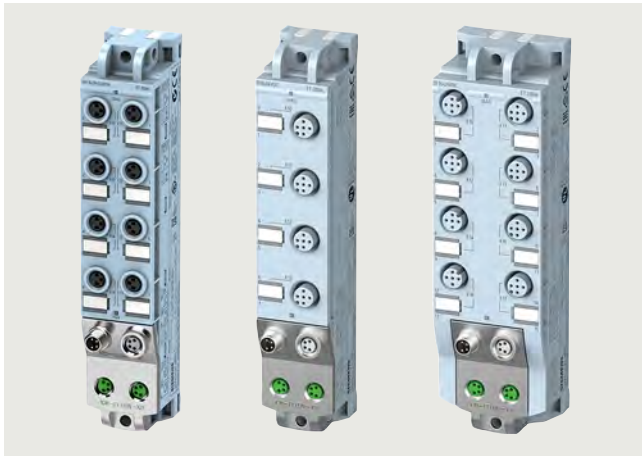

- 30 and 45 mm wide modules with parameters and diagnostic functions
- 8-channel digital input module with M8 or M12 connection
- 16-channel digital input module with M12 connection
- 8-channel digital input/output module with M8 or M12 connection
- 16-channel digital input / output module with M12 connection
- 8-channel digital output module 2A with M12 connection

Ordering data

Digital input modules

DI 8X24VDC, 8XM8

6ES7141-5BF00-0BA0

DI 8X24VDC, 4XM12

6ES7141-5AF00-0BA0

DI 16X24VDC, 8XM12

6ES7141-5AH00-0BA0

Digital output modules

DQ 8X24VDC/2A, 8XM12

6ES7142-5AF00-0BA0

Digital input/output modules

4 DIQ / 4 DQ, 24 V DC, 0.5 A

6ES7143-5BF00-0BA0

DIQ 4+DQ 4X24VDC/0.5A, 4XM12

6ES7143-5AF00-0BA0

DIQ 8x24VDC/0.5A, 8XM8

6ES7143-5BF50-0BA0

DIQ 16x24VDC/0.5A, 8XM12

6ES7143-5AH00-0BA0

Accessories

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Power cable M8

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 connector for ET connection

6ES7194-2AB00-0AA0

4-pin, shielded

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect stripping tool

6ES7194-2KA00-0AA0

Stripping tool for stripping the
ET connection bus cable

Labels

10 x 5 mm, RAL 9016; 5 frames with
40 plates each

6ES7194-2BA00-0AA0

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7141-5BF00-0BA0 ET 200AL, DI 8x24VDC, 8xM8	6ES7141-5AF00-0BA0 ET 200AL, DI 8x24VDC, 4xM12	6ES7141-5AH00-0BA0 ET 200AL, DI 16x24VDC, 8xM12
General information			
Product type designation	DI 8x24VDC	DI 8x24VDC	DI 16x24VDC
Product function			
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
Engineering with			
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher	STEP 7 V13 SP1 or higher	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3	V5.5 SP4 Hotfix 7 or higher	V5.5 SP4 Hotfix 7 or higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	GSD as of Revision 5	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	GSDML V2.3.1	GSDML V2.3.1
Supply voltage			
Load voltage 1L+			
• Rated value (DC)	24 V	24 V	24 V
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Input current			
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	25 mA; without load 4 A; Maximum value	25 mA; without load 4 A; Maximum value	30 mA; without load 4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value	4 A; Maximum value
Encoder supply			
Number of outputs	8	4	8
Digital inputs			
Number of digital inputs	8	8	16
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes	Yes
Number of simultaneously controllable inputs			
all mounting positions			
- up to 55 °C, max.	8	8	16
Input voltage			
• Rated value (DC)	24 V	24 V	24 V
• for signal "0"	-30 to +5 V	-30 to +5 V	-30 to +5 V
• for signal "1"	+11 to +30V	+11 to +30V	+11 to +30V
Input current			
• for signal "1", typ.	3.2 mA	3.2 mA	3.2 mA
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/ status information			
Alarms			
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnostics			
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; Sensor supply to M; module by module	Yes; Sensor supply to M; module by module
Diagnostics indication LED			
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED	Yes; green/red LED

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7141-5BF00-0BA0 ET 200AL, DI 8x24VDC, 8xM8	6ES7141-5AF00-0BA0 ET 200AL, DI 8x24VDC, 4xM12	6ES7141-5AH00-0BA0 ET 200AL, DI 16x24VDC, 8xM12
Potential separation			
between the load voltages	Yes	Yes	Yes
Potential separation channels			
• between the channels	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes
• between the channels and the power supply of the electronics	No	No	No
Degree and class of protection			
IP degree of protection	IP65/67	IP65/67	IP65/67
Standards, approvals, certificates			
Suitable for safety-related tripping of standard modules	Yes; from FS01	Yes; from FS01	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules			
• Performance level according to ISO 13849-1	PL d	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2	SIL 2
Product functions / security			
signed firmware update	Yes	Yes	Yes
data integrity	Yes	Yes	Yes
Ambient conditions			
Ambient temperature during operation			
• min.	-30 °C	-30 °C	-30 °C
• max.	55 °C	55 °C	55 °C
Altitude during operation relating to sea level			
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method			
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pole	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole	M8, 4-pole	M8, 4-pole
ET-Connection			
• ET-Connection	M8, 4-pin, shielded	M8, 4-pin, shielded	M8, 4-pin, shielded
Dimensions			
Width	30 mm	30 mm	45 mm
Height	159 mm	159 mm	159 mm
Depth	40 mm	40 mm	40 mm
Weights			
Weight, approx.	145 g	145 g	184 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7142-5AF00-0BA0 ET 200AL, DQ 8x24VDC/2A, 8xM12
General information	
Product type designation	DQ 8x24VDC/2A
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	V5.5 SP4 Hotfix 7 or higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; load increasing
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; load increasing
Input current	
Current consumption (rated value)	40 mA; 40 mA (1L+) / 35 mA (2L+); without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Digital outputs	
Number of digital outputs	8
• in groups of	4; 2 load groups for 4 outputs each
output type acc. to IEC 61131, type 2	Yes
Short-circuit protection	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-47 V)
Switching capacity of the outputs	
• on lamp load, max.	10 W
Load resistance range	
• lower limit	12 Ω
• upper limit	4 kΩ
Output voltage	
• for signal "1", min.	L+ (-0.8 V)
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.1 Hz; 0.25 Hz at 25 °C
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per group, max.	4 A; For inductive load max. 2 channels per group

Article number	6ES7142-5AF00-0BA0 ET 200AL, DQ 8x24VDC/2A, 8xM12
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Short-circuit	Yes; Outputs to ground; module by module
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels, in groups of	4
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No; 4 channels are non-isolated and 4 channels are isolated from supply voltage 1L+
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Product functions / security	
signed firmware update	Yes
data integrity	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	192 g

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5BF50-0BA0 ET 200AL, DIQ 8x24VDC/0,5A, 8xM8	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
General information				
Product type designation	DIQ 4+DQ 4x24VDC/0.5A	DIQ 4+DQ 4x24VDC/0.5A	DIQ 8x24VDC/0.5A, 8xM8	DIQ 16x24VDC/0.5A
Product function				
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M4	Yes; I&M0 to I&M3
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher	STEP 7 V13 SP1 or higher	STEP 7 V18 or higher	STEP 7 V14 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3	V5.5 SP4 Hotfix 7 or higher	V5.6 and higher	V5.5 SP4 Hotfix 7 or higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	GSD as of Revision 5	GSD as of Revision 5	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	GSDML V2.3.1	GSDML V2.4.x	GSDML V2.3.1
Operating mode				
• DI				Yes
• Counter				Yes
• DQ				Yes
Supply voltage				
Load voltage 1L+				
• Rated value (DC)	24 V	24 V	24 V	24 V
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up	Yes; against destruction	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Load voltage 2L+				
• Rated value (DC)	24 V	24 V	24 V	24 V
• Reverse polarity protection	Yes; against destruction; load increasing	Yes; against destruction; load increasing	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Input current				
Current consumption (rated value)	40 mA; 40 mA (1L+) / 20 mA (2L+); without load	40 mA; 40 mA (1L+) / 20 mA (2L+); without load	20 mA; 20 mA (1L+) / 40 mA (2L+); without load	60 mA; 60 mA (1L+) / 40 mA (2L+); without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value	4 A; Maximum value	3.25 A; Maximum value	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value	4 A; Maximum value	4 A; Maximum value
Encoder supply				
Number of outputs	4	4	8	8
Digital inputs				
Number of digital inputs	4; Parameterizable as DIQ	4; Parameterizable as DIQ	8; Parameterizable as DIQ	16; Parameterizable as DIQ
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes	Yes	Yes
Number of simultaneously controllable inputs				
all mounting positions				
- up to 55 °C, max.	4	4	8	16
Digital input functions, parameterizable				
• Freely usable digital input				Yes
• Counter				Yes
Input voltage				
• Rated value (DC)	24 V	24 V	24 V	24 V
• for signal "0"	-3 to +5V	-3 to +5V	-3 to +5V	-3 to +5V
• for signal "1"	+11 to +30V	+11 to +30V	+11 to +30V	+11 to +30V
Input current				
• for signal "1", typ.	3.2 mA	3.2 mA	2.4 mA	3 mA

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5BF50-0BA0 ET 200AL, DIQ 8x24VDC/0,5A, 8xM8	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
Input delay (for rated value of input voltage) for standard inputs - parameterizable				Yes
for technological functions - parameterizable				Yes
Digital outputs				
Number of digital outputs	8; 4 DQ fixed, 4 DIQ parameterizable	8; 4 DQ fixed, 4 DIQ parameterizable	8	16; Parameterizable as DIQ
• in groups of	4; 2 load groups for 4 outputs each	4; 2 load groups for 4 outputs each		8; 2 load groups for 8 outputs each
output type acc. to IEC 61131, type 0.5	Yes	Yes	Yes	Yes
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic	Yes; per channel, electronic	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-47 V)	2L+ (-47 V)	2L+ (-47 V)	L+ (-53 V)
Digital output functions, parameterizable				
• Switching tripped by comparison values				Yes
• Freely usable digital output				Yes
Switching capacity of the outputs				
• on lamp load, max.	5 W	5 W	5 W	5 W
Load resistance range				
• lower limit	48 Ω	48 Ω	48 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ	4 kΩ	4 kΩ
Output voltage				
• for signal "1", min.	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-0.8 V)
Output current				
• for signal "1" rated value	0.5 A	0.5 A	0.5 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA	0.5 mA	0.5 mA
Switching frequency				
• with resistive load, max.	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz	1 Hz	1 Hz
Total current of the outputs				
• Current per group, max.	2 A	2 A		4 A
• Current per module, max.			4 A	
Encoder				
Connectable encoders				
• 2-wire sensor	Yes	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/ status information				
Substitute values connectable	Yes; channel by channel, parameterizable	Yes; channel by channel, parameterizable	Yes; channel by channel, parameterizable	Yes; channel by channel, parameterizable
Alarms				
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnoses				
• Short-circuit	Yes; Outputs to M; encoder supply to M; module by module	Yes; Outputs to M; encoder supply to M; module by module	Yes; Outputs to M; encoder supply to M; module by module	Yes; Outputs to M; encoder supply to M; module by module
Diagnostics indication LED				
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED	Yes; green/red LED	Yes; green/red LED
• For load voltage monitoring	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5BF50-0BA0 ET 200AL, DIQ 8x24VDC/0,5A, 8xM8	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
Potential separation				
between the load voltages	Yes	Yes	Yes	Yes
Potential separation channels				
• between the channels, in groups of	4; DIQ channels are isolated from DQ channels	4; DIQ channels are isolated from DQ channels		8
• between the channels and backplane bus	Yes	Yes	Yes	Yes
• between the channels and the power supply of the electronics	No; DIQ channels are non-isolated and DQ channels are isolated from supply voltage 1L+	No; DIQ channels are non-isolated and DQ channels are isolated from supply voltage 1L+	Yes	No; 8 channels are non-isolated and 8 channels are isolated from supply voltage 1L+
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Standards, approvals, certificates				
Suitable for safety-related tripping of standard modules	Yes; from FS01	Yes; from FS01		No
Highest safety class achievable for safety-related tripping of standard modules				
• Performance level according to ISO 13849-1	PL d	PL d		
• Category according to ISO 13849-1	Cat. 3	Cat. 3		
• SIL acc. to IEC 62061	SIL 2	SIL 2		
Product functions / security				
signed firmware update	Yes	Yes	Yes	Yes
data integrity	Yes	Yes	Yes	Yes
Ambient conditions				
Ambient temperature during operation				
• min.	-30 °C	-30 °C	-30 °C	-30 °C
• max.	55 °C	55 °C	55 °C	55 °C
Altitude during operation relating to sea level				
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method				
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pole	M8, 3-pole	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole	M8, 4-pole	M8, 4-pole	M8, 4-pole
ET-Connection				
• ET-Connection	M8, 4-pin, shielded	M8, 4-pin, shielded	M8, 4-pin, shielded	M8, 4-pin, shielded
Dimensions				
Width	30 mm	30 mm	30 mm	45 mm
Height	159 mm	159 mm	159 mm	159 mm
Depth	40 mm	40 mm	40 mm	40 mm
Weights				
Weight, approx.	145 g	145 g	145 g	195 g

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Analog I/O modules

Overview



- 30 mm wide module with parameters and diagnostic functions
- For connecting analog actuators and sensors without additional amplifiers
- 4-channel analog input modules with M12 connection
- 4-channel analog output module with M12 connection

Ordering data

Analog input modules

AI 4xU/I/RTD, 4xM12

6ES7144-5KD00-0BA0

AI 4xRTD/TC, 4xM12

6ES7144-5KD50-0BA0

AQ 4xU/I, 4xM12

6ES7145-5ND00-0BA0

Accessories

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Power cable M8

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 connector for ET connection

4-pin, shielded

6ES7194-2AB00-0AA0

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect stripping tool

Stripping tool for stripping the
ET connection bus cable

6ES7194-2KA00-0AA0

Labels

10 x 5 mm, RAL 9016; 5 frames with
40 labels each

6ES7194-2BA00-0AA0

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Analog I/O modules

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
General information		
Product type designation	AI 4xU/I/RTD	AI 4xRTD/TC
Product function		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher	STEP 7 V16 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3	V5.5 SP4 and higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	GSDML V2.34
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes; against destruction	Yes; against destruction
Input current		
Current consumption (rated value)	35 mA; without load	30 mA; without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value
Encoder supply		
Number of outputs	4	
Analog inputs		
Number of analog inputs	4	4
• For current measurement	4	
• For voltage measurement	4	4
• For resistance/resistance thermometer measurement	4	4
• For thermocouple measurement		4
permissible input voltage for voltage input (destruction limit), max.	30 V	15 V
permissible input current for current input (destruction limit), max.	50 mA	
Constant measurement current for resistance-type transmitter, typ.		230 ... 300 µA
Cycle time (all channels), min.	8 ms	90 ms
Technical unit for temperature measurement adjustable	Yes; Degrees Celsius / degrees Fahrenheit / Kelvin	Yes; Degrees Celsius / degrees Fahrenheit / Kelvin
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	
• 1 V to 5 V	Yes	
• -80 mV to +80 mV		Yes; 16 bit incl. sign
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Analog I/O modules

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
Input ranges (rated values), thermocouples - Type B - Type C - Type E - Type J - Type K - Type L - Type N - Type R - Type S - Type T - Type U		Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign
Input ranges (rated values), resistance thermometer - Ni 100 - Ni 1000 - Pt 100 - Pt 1000	Yes; Standard/climate Yes; Standard/climate	Yes; Standard/climate Yes; Standard/climate Yes; Standard/climate Yes; Standard/climate
Input ranges (rated values), resistors 0 to 150 ohms 0 to 300 ohms	Yes Yes	Yes Yes
Thermocouple (TC) Temperature compensation - parameterizable		Yes
Cable length shielded, max.	30 m	30 m
Analog value generation for the inputs Integration and conversion time/resolution per channel - Resolution with overrange (bit including sign), max. - Integration time, parameterizable - Integration time (ms) - Basic conversion time, including integration time (ms) - Interference voltage suppression for interference frequency f1 in Hz - Conversion time (per channel)	16 bit Yes; channel by channel 0,3 / 16,7 / 20 / 60 3 600 / 60 / 50 / 16.7 2 / 18 / 21 / 61 ms	16 bit Yes; channel by channel 16.7 / 20 / 60 18 / 21 / 61 ms 60 / 50 / 16.7
Smoothering of measured values parameterizable	Yes	Yes
Encoder Connection of signal encoders - for voltage measurement - for current measurement as 2-wire transducer - for current measurement as 4-wire transducer - for resistance measurement with two-wire connection - for resistance measurement with three-wire connection - for resistance measurement with four-wire connection	Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Analog I/O modules

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
Errors/accuracies		
Temperature error of internal compensation		±4 °C
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to input range, (+/-)	0.25 %	0.25 %
• Current, relative to input range, (+/-)	0.25 %	
• Resistance, relative to input range, (+/-)	0.15 %	0.15 %
• Resistance thermometer, relative to input range, (+/-)	0.15 %	0.15 %
• Thermocouple, relative to input range, (+/-)		0.25 %
Interference voltage suppression for $f = n \times (f1 \pm 0.5 \%)$, $f1 = \text{interference frequency}$		
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	40 dB
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Limit value alarm	Yes; Parameterizable	Yes; Parameterizable
Diagnoses		
• Wire-break	Yes; at 4 mA to 20 mA and 1 V to 5 V	Yes; Not for ±80 mV
• Short-circuit	Yes; Encoder supply to M, channel by channel	
• Overflow/underflow	Yes	Yes
Diagnostics indication LED		
• Channel status display	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED
Potential separation		
between the load voltages	Yes	Yes
Potential separation channels		
• between the channels	No	No
• between the channels and backplane bus	Yes	Yes
• between the channels and the power supply of the electronics	No	No
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; from FS01
Suitable for applications according to AMS 2750		Yes; Declaration of Conformity, see online support entry 109757262
Suitable for applications according to CQI-9		Yes; Based on AMS 2750 E

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

I/O modules > Analog I/O modules

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
Highest safety class achievable for safety-related tripping of standard modules		
- Performance level according to ISO 13849-1 - Category according to ISO 13849-1 - SIL acc. to IEC 62061	PL d Cat. 3 SIL 2	PL d Cat. 3 SIL 2
Product functions / security		
signed firmware update	Yes	Yes
data integrity	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
- min. - max.	-30 °C 55 °C	-30 °C 55 °C
Altitude during operation relating to sea level		
Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method		
Design of electrical connection for the inputs and outputs	M12, 5-pole	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole	M8, 4-pole
ET-Connection		
ET-Connection	M8, 4-pin, shielded	M8, 4-pin, shielded
Dimensions		
Width	30 mm	30 mm
Height	159 mm	159 mm
Depth	40 mm	40 mm
Weights		
Weight, approx.	168 g	168 g

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
General information	
Product type designation	AQ 4xU/I
Product function	
I&M data	Yes; I&M0 to I&M3
Engineering with	
- STEP 7 TIA Portal configurable/integrated from version - STEP 7 configurable/integrated from version - PROFIBUS from GSD version/GSD revision - PROFINET from GSD version/GSD revision	STEP 7 V14 or higher V5.5 SP4 Hotfix 7 or higher GSD as of Revision 5 GSDML V2.3.1
Supply voltage	
Load voltage 1L+	
- Rated value (DC) - Reverse polarity protection	24 V Yes; Against destruction; actuator power supply outputs applied with reversed polarity
Input current	
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	75 mA; without load 4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Actuator supply	
Number of outputs	4

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
Analog outputs	
Number of analog outputs	4
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	24 mA
Current output, no-load voltage, max.	15 V
Cycle time (all channels) max.	1 ms
Output ranges, voltage	
0 to 10 V 1 V to 5 V -10 V to +10 V	Yes; 15 bit Yes; 14 bit Yes; 16 bit incl. sign
Output ranges, current	
0 to 20 mA -20 mA to +20 mA 4 mA to 20 mA	Yes; 15 bit Yes; 16 bit incl. sign Yes; 14 bit
Connection of actuators	
- for voltage output two-wire connection - for voltage output four-wire connection - for current output two-wire connection - for current output four-wire connection	Yes Yes Yes Yes

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Analog I/O modules

Technical specifications

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 kΩ
• with voltage outputs, capacitive load, max.	1 μF
• with current outputs, max.	500 Ω
• with current outputs, inductive load, max.	1 mH
Cable length	
• shielded, max.	30 m
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
Settling time	
• for resistive load	1 ms
• for capacitive load	1 ms
• for inductive load	1 ms
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to output range, (+/-)	0.15 %
• Current, relative to output range, (+/-)	0.15 %
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Wire-break	Yes; channel-by-channel, only for output type "current"
• Short-circuit	Yes; Actuator supply module by module; channel by channel for output type "voltage"
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS03
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Product functions / security	
signed firmware update	Yes
data integrity	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	30 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	175 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Fail-safe I/O modules

Overview



The ET 200AL fail-safe I/O module expands the ET 200AL PN system family. It is incorporated seamlessly into the Safety Integrated concept of SIMATIC. It also supports safety-related communication via PROFI-safe. The functional safety is certified in accordance with IEC 61508. It is designed for safety-related use up to SIL 3 according to IEC 62061 and PL e according to ISO 13849. The following fail-safe I/O module with 4x digital inputs and 2x digital outputs with 45 mm width is available:

- F-DI 4+F-DQ 2x24VDC/2A, 4xM12 PROFI-safe

Ordering data

Article No.

Fail-safe digital input/output modules

F-DI 4+F-DQ 2x24VDC/2A, 4xM12

6ES7146-5FF00-0BA0

Accessories

M12 Y-cable

For connection of single-channel sensors (1oo1 evaluation), 5-pin

6ES7194-6KB00-0XA0

For joint connection of an F-DQ and an F-DI channel by means of an 8-pin M12 socket

6ES7194-6KC00-0XA0

E-coding plug (metal) for fail-safe ET 200 distributed I/O, IP65/67

6ES7194-6KB01-0AA0

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends, 2 M8 plugs

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends, 2 M8 plugs, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end, 1 M8 plug

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Article No.

M8 power cable

4-pin

Pre-assembled at both ends, M8 plug and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends, angled M8 plug and angled M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end, M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 plug for ET connection

4-pin, shielded

6ES7194-2AB00-0AA0

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect stripping tool

Stripping tool for stripping the ET connection bus cable

6ES7194-2KA00-0AA0

Labels, yellow

10 x 5 mm; 5 frames with 40 labels each

6ES7194-2BB00-0AA0

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Fail-safe I/O modules

Technical specifications

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
General information	
Product type designation	F-DI 4+F-DQ 2x24VDC/2A, 4xM12
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher
Operating mode	
• DI	Yes
• DQ	Yes
Supply voltage	
Rated value (DC)	24 V
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; outputs applied with reversed polarity for loads connected between M-switch and 2L+ will conduct
Input current	
Current consumption (rated value)	55 mA (1L+) / 40 mA (2L+); without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Encoder supply	
Number of outputs	2
Digital inputs	
Number of digital inputs	4
Input characteristic according to IEC 61131	Type 1
Number of simultaneously controllable inputs	
all mounting positions - up to 55 °C, max.	4
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+15 to +30 V
Input current	
• for signal "1", typ.	4.85 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes
Digital outputs	
Number of digital outputs	2
• in groups of	2
Short-circuit protection	Yes; per channel, electronic
Open-circuit detection	Yes; per channel, only detects when output is off
Overload protection	Yes
Limitation of inductive shutdown voltage to	P-switch: -26 V DC referenced to 2M, M-switch: +48 V DC referenced to 2M

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
Switching capacity of the outputs	
• on lamp load, max.	10 W
Load resistance range	
• lower limit	12 Ω
• upper limit	2 kΩ
Output voltage	
• for signal "1", min.	L+ (-2.0 V), P-switch is L+ (-1.5 V), M-switch is 0.5 V
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	30 Hz
• with inductive load, max.	0.1 Hz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per group, max.	4 A
Encoder	
Connectable encoders	
• 2-wire sensor	No
- permissible quiescent current (2-wire sensor), max.	0.5 mA
Interrupts/diagnostics/ status information	
Substitute values connectable	No
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; outputs when off
• Short-circuit	Yes; inputs, outputs, encoder supply
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels, in groups of	4 DI channels are isolated from 2 DQ channels
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	DI channels are non-isolated from supply voltage 1L+ and DQ channels are isolated from the supply voltage 1L+
Degree and class of protection	
IP degree of protection	IP65/67

I/O systems
SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Fail-safe I/O modules

Technical specifications

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
- Performance level according to ISO 13849-1 - SIL acc. to IEC 61508	PLd (DI single-channel), PLe (DI two-channel, DQ) SIL 2 (DI single-channel), SIL 3 (DI two-channel, DQ)
Ambient conditions	
Ambient temperature during operation	
- min. - max.	-30 °C 55 °C

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pin
ET-Connection	
ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	220 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Communication > CM IO-Link

Overview



- 30 mm wide CM IO-Link communications module
- For the connection of up to 4 IO-Link devices according to IO-Link Specification V1.0 and V1.1 and port Class B
- The IO-Link parameters are configured using the S7-PCT Port Configuration Tool, V3.2 and higher.

Ordering data

CM IO-Link

CM 4X IO-Link, 4XM12;
for the connection of up to
4 IO-Link devices
according to IO-Link Specification
V1.0 and V1.1 and port Class B

Article No.

6ES7147-5JD00-0BA0

Accessories

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Article No.

Power cable M8

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 connector for ET connection

4-pin, shielded

6ES7194-2AB00-0AA0

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect stripping tool

Stripping tool for stripping the
ET connection bus cable

6ES7194-2KA00-0AA0

Labels

10 x 5 mm, RAL 9016;
5 frames with 40 labels each

6ES7194-2BA00-0AA0

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Communication > CM IO-Link

Technical specifications

Article number	6ES7147-5JD00-0BA0 ET 200AL, cm 4x IO-Link, 4xM12
General information	
Product type designation	CM 4x IO-Link
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1
Operating mode	
• IO-Link	Yes
• DI	Yes
• DQ	Yes; max. 100 mA
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; load increasing
Input current	
Current consumption (rated value)	40 mA; without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Encoder supply	
Number of outputs	4
IO-Link	
Number of ports	4
• of which simultaneously controllable	4
IO-Link protocol 1.0	Yes
IO-Link protocol 1.1	Yes
Transmission rate	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230 kBaud (COM3)
Size of process data, input per port	32 byte
Size of process data, input per module	132 byte
Size of process data, output per port	32 byte
Size of process data, output per module	128 byte
Memory size for device parameter	2 kbyte; for each port
Master backup	Possible with function block IO_LINK_MASTER
Configuration without S7-PCT	Possible; autostart/manual function
Cable length unshielded, max.	20 m
Connection of IO-Link devices	
• Port type A	Yes; via 3-core cable
• Port type B	Yes; Additional device supply: 1.6 A total current of all ports

Article number	6ES7147-5JD00-0BA0 ET 200AL, cm 4x IO-Link, 4xM12
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SILCL according to IEC 62061	SILCL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	30 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	145 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

IO-Link I/O modules

Overview



The IO-Link communication standard enables and standardizes communication between machine and plant PLCs, on the one hand, and sensors, actuators and other field devices, on the other hand.

The IO-Link I/O modules enable the simple connection of binary standard sensors and actuators, whereby the signals and energy supply are transferred via IO-Link (IO-Link master).

The IO-Link I/O modules can be connected to any IO-Link masters and, in this way, fieldbus-independent and distributed I/O units can be formed. The universal usage of the IO-Link DIQ I/O modules enables additional flexibility here.

With the ET 200AL IO-Link I/O modules, a comprehensive portfolio of digital input, output and input/output modules with the design and system features of the ET 200AL is available.

Ordering data

Article No.

IO-Link digital input modules

- Degree of protection IP67
- DI 8x 24VDC, 8x M8
 - DI 16x 24VDC, 8x M12

6ES7141-5BF00-0BL0
6ES7141-5AH00-0BL0

IO-Link digital output modules

- Degree of protection IP67
- DQ 8x 24VDC/2A, 8x M12

6ES7142-5AF00-0BL0

IO-Link digital input/output modules

- Degree of protection IP67
- DIQ 4+DQ 4x 24VDC/0.5A, 8x M8
 - DIQ 16x24VDC/0.5A, 8x M12

6ES7143-5BF00-0BL0
6ES7143-5AH00-0BL0

Accessories

- Control connecting cable 5 x 0.25**
- Flexible IO-Link cable with 5 copper cores (0.25 mm²) for connecting IO-Link sensors/actuators (IO-Link port class B); sold by the meter; max. delivery unit 1 000 m minimum order quantity 20 m

6XV1801-2C

M12 circular connector

- Can be assembled, for connecting actuators or sensors, 5-pin, screw terminal, max. 0.75 mm², A-coded, max. 4 A
- Straight
 - Angled

3RK1902-4BA00-5AA0
3RK1902-4DA00-5AA0

Control line

- Preassembled on one side with 1 x M12 plug angled, 5-pin, 5 x 0.34 mm², A-coded, max. 4 A, PUR casing, black
- 1.5 m
 - 5 m
 - 10 m

3RK1902-4HB15-5AA0
3RK1902-4HB50-5AA0
3RK1902-4HC01-5AA0

Article No.

M12-180/M12-180 control connecting cable

Flexible 5-core cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket, both ends with a straight cable outlet, for connection of IO-Link sensors/actuators

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

6XV1801-2CE50
6XV1801-2CH10
6XV1801-2CH15
6XV1801-2CH20
6XV1801-2CH30
6XV1801-2CH50
6XV1801-2CN10
6XV1801-2CN15

Power M12 cable connector PRO

Connection socket for 24 V DC supply voltage, 4-pin, L-coded, with installation instructions, 1 unit

6GK1906-0EB00

M12 sealing cap

For protection of unused M12 connections with ET 200pro

3RX9802-0AA00

M12 sealing cap for IP67 modules

15 mm outer diameter, with O-ring, 10 units

3RK1901-1KA00

M8 sealing cap

For IP67 modules

3RK1901-1PN00

M12 Y-cable

For double connection of I/O by means of a single cable to ET 200, 5-pin

6ES7194-6KA00-0XA0

Energy cable 4 x 1.5

Trailable power cable, with 4 copper cores (1.5 mm²) for connecting to M12 plug-in connector; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1801-2B

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

IO-Link I/O modules

Ordering data	Article No.		Article No.	
M12-180/M12-180 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket to supply terminal devices with 24 V DC Length: • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m	6XV1801-6DE50 6XV1801-6DH10 6XV1801-6DH15 6XV1801-6DH20 6XV1801-6DH30 6XV1801-6DH50 6XV1801-6DN10 6XV1801-6DN15		M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket, both sides angled 90°, to supply terminal devices with 24 V DC Length: • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m	6XV1801-6GE50 6XV1801-6GH10 6XV1801-6GH15 6XV1801-6GH20 6XV1801-6GH30 6XV1801-6GH50 6XV1801-6GN10 6XV1801-6GN15
		Labels 10 x 5 mm, RAL 9016; 5 frames with 40 labels each	6ES7194-2BA00-0AA0	

Technical specifications

Article number	6ES7141-5BF00-0BL0 ET 200AL, IO-Link, DI 8x24VDC, 8xM8	6ES7141-5AH00-0BL0 ET 200AL, IO-Link, DI 16x24VDC, 8xM12
General information		
Product type designation	IO-Link DI 8x24VDC	IO-Link DI 16x24VDC
Engineering with		
• IODD file	Yes	Yes
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V; Supply from 1Us+ of the IO-Link master	24 V; Supply from 1Us+ of the IO-Link master
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Input current		
Current consumption (rated value)	15 mA; without load	20 mA; without load
Encoder supply		
Number of outputs	8; Supply from 1Us+ of the IO-Link master	8; Supply from 1Us+ of the IO-Link master
Digital inputs		
Number of digital inputs	8	16
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs		
all mounting positions		
- up to 55 °C, max.	8	16
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-30 to +5 V	-30 to +5 V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	3 mA	3 mA
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA

10

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

IO-Link I/O modules

Technical specifications

Article number	6ES7141-5BF00-0BL0 ET 200AL, IO-Link, DI 8x24VDC, 8xM8	6ES7141-5AH00-0BL0 ET 200AL, IO-Link, DI 16x24VDC, 8xM12
IO-Link		
IO-Link protocol 1.1	Yes	Yes
Transmission rate	38.4 kBd (COM2)	38.4 kBd (COM2)
Cycle time, min.	2.1 ms	2.5 ms
Size of process data, input per module	1 byte	2 byte
Size of process data, output per module	0 byte	0 byte
Supported IO-Link profiles	common profile	common profile
Cable length unshielded, max.	20 m	20 m
Connection of IO-Link devices		
• Port type A	Yes	Yes
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
Diagnostics		
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; Sensor supply to M; module by module
Diagnostics indication LED		
• Channel status display	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED
Potential separation		
Potential separation channels		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during operation		
• min.	-30 °C	-30 °C
• max.	55 °C	55 °C
connection method		
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pin, A-coded
Type of electrical connection for IO-Link	M12, 5-pin, A-coded	M12, 5-pin, A-coded
Dimensions		
Width	30 mm	45 mm
Height	159 mm	159 mm
Depth	40 mm	40 mm
Weights		
Weight, approx.	124 g	155 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

IO-Link I/O modules

Technical specifications

Article number	6ES7142-5AF00-0BL0 ET 200AL, IO-Link, DQ 8x24VDC/2A, 8xM12
General information	
Product type designation	IO-Link DQ 8x24VDC/2A
Engineering with	
• IODD file	Yes
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V; Supply from 1Us+ of the IO-Link master
• Reverse polarity protection	Yes; against destruction
Load voltage 2L+	
• Rated value (DC)	24 V; Supply via M12 connector L-coded
• Reverse polarity protection	Yes; against destruction; load increasing
Input current	
Current consumption (rated value) from load voltage 2L+, max.	12 mA; without load 8 A; Maximum value
Digital outputs	
Number of digital outputs	8
output type acc. to IEC 61131, type 2	Yes
Short-circuit protection	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-47 V)
Switching capacity of the outputs	
• on lamp load, max.	10 W
Load resistance range	
• lower limit	12 Ω
• upper limit	4 kΩ
Output voltage	
• for signal *1*, min.	L+ (-0.8 V)
Output current	
• for signal *1* rated value	2 A (45 °C); 1 A (55 °C)
• for signal *0* residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.1 Hz; 0.25 Hz at 25 °C
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per module, max.	8 A
IO-Link	
IO-Link protocol 1.1	Yes
Transmission rate	38.4 kBd (COM2)
Cycle time, min.	2.1 ms
Size of process data, input per module	0 byte
Size of process data, output per module	1 byte
Supported IO-Link profiles	common profile
Cable length unshielded, max.	20 m
Connection of IO-Link devices	
• Port type A	Yes

Article number	6ES7142-5AF00-0BL0 ET 200AL, IO-Link, DQ 8x24VDC/2A, 8xM12
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Short-circuit	Yes; Outputs to ground; module by module
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and the power supply of the electronics	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded
Type of electrical connection for IO-Link	M12, 5-pin, A-coded
Design of electrical connection for supply voltage	M12, 4-pin, L-coded
Dimensions	
Width	45 mm
Height	159 mm
Depth	45 mm
Weights	
Weight, approx.	168 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

IO-Link I/O modules

Technical specifications

Article number	6ES7143-5BF00-0BL0 ET 200AL, IO-Link, DIQ 4+DQ 4x24VDC/0,5A
General information	
Product type designation	IO-Link DIQ 4+DQ 4x24VDC/0,5A
Engineering with	
• IODD file	Yes
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V; Supply from 1Us+ of the IO-Link master
• Reverse polarity protection	Yes; against destruction
Load voltage 2L+	
• Rated value (DC)	24 V; Supply from 2UA+ of the IO-Link master
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Input current	
Current consumption (rated value) from load voltage 2L+, max.	15 mA; without load 4 A; Maximum value
Encoder supply	
Number of outputs	8; Supply from 2UA+ of the IO-Link master
Digital inputs	
Number of digital inputs	4; Parameterizable as DIQ
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Number of simultaneously controllable inputs	
all mounting positions	
- up to 55 °C, max.	4
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-3 to +5V
• for signal "1"	+11 to +30V
Input current	
• for signal "1", typ.	3 mA
Digital outputs	
Number of digital outputs	8; 4 DQ fixed, 4 DIQ parameterizable
output type acc. to IEC 61131, type 0.5	Yes
Short-circuit protection	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-50 V)
Switching capacity of the outputs	
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	4 kΩ
Output voltage	
• for signal "1", min.	L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.5 Hz
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per module, max.	4 A
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA

Article number	6ES7143-5BF00-0BL0 ET 200AL, IO-Link, DIQ 4+DQ 4x24VDC/0,5A
IO-Link	
IO-Link protocol 1.1	Yes
Transmission rate	38.4 kBd (COM2)
Cycle time, min.	2.4 ms
Size of process data, input per module	1 byte
Size of process data, output per module	1 byte
Supported IO-Link profiles	common profile
Cable length unshielded, max.	20 m
Connection of IO-Link devices	
• Port type B	Yes
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Short-circuit	Yes; outputs to ground; encoder supply to ground; module by module
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and the power supply of the electronics	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M8, 3-pole
Type of electrical connection for IO-Link	M12, 5-pin, A-coded
Dimensions	
Width	30 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	125 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Cables and connectors

Overview

- Pre-assembled cables in various designs and lengths:
 - For connecting the interface modules and I/O modules via the internal backplane bus (ET connection).
 - For power supply.

Ordering data

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

PUR line, pre-assembled at both
ends, 2 M8 connectors

0.19 m

6ES7194-2MH02-0AA0

0.3 m

6ES7194-2MH03-0AA0

1 m

6ES7194-2MH10-0AA0

2 m

6ES7194-2MH20-0AA0

5 m

6ES7194-2MH50-0AA0

10 m

6ES7194-2MN10-0AA0

15 m

6ES7194-2MN15-0AA0

PUR line, pre-assembled at both
ends, 2 M8 connectors, angled

0.3 m

6ES7194-2MH03-0AB0

1 m

6ES7194-2MH10-0AB0

2 m

6ES7194-2MH20-0AB0

5 m

6ES7194-2MH50-0AB0

10 m

6ES7194-2MN10-0AB0

15 m

6ES7194-2MN15-0AB0

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

PUR line, pre-assembled at one
end, 1 M8 connector

2 m

6ES7194-2MH20-0AC0

5 m

6ES7194-2MH50-0AC0

10 m

6ES7194-2MN10-0AC0

15 m

6ES7194-2MN15-0AC0

Article No.

Connecting cable for bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors. 0.2 m

6ES7194-2LH02-0AD0

PUR line, pre-assembled at both
ends, 2 M8 connectors. 0.2 m

6ES7194-2MH02-0AD0

Power cable M8

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

PUR line, pre-assembled at both
ends, M8 connector and M8 socket

0.19 m

6ES7194-2MH02-1AA0

0.3 m

6ES7194-2MH03-1AA0

1 m

6ES7194-2MH10-1AA0

2 m

6ES7194-2MH20-1AA0

5 m

6ES7194-2MH50-1AA0

10 m

6ES7194-2MN10-1AA0

15 m

6ES7194-2MN15-1AA0

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

PUR line, pre-assembled at both
ends, angled M8 connector and
angled M8 socket

0.3 m

6ES7194-2MH03-1AB0

1 m

6ES7194-2MH10-1AB0

2 m

6ES7194-2MH20-1AB0

5 m

6ES7194-2MH50-1AB0

10 m

6ES7194-2MN10-1AB0

15 m

6ES7194-2MN15-1AB0

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Ordering data	Article No.		Article No.
Pre-assembled at one end, M8 socket		M8 connector for ET connection	6ES7194-2AB00-0AA0
2 m	6ES7194-2LH20-1AC0	4-pin, shielded	
5 m	6ES7194-2LH50-1AC0	M8 power connector	
10 m	6ES7194-2LN10-1AC0	Male contact insert, 4-pin	6ES7194-2AA00-0AA0
15 m	6ES7194-2LN15-1AC0	Female contact insert, 4-pin	6ES7194-2AC00-0AA0
PUR line, pre-assembled at one end, M8 socket		ET connection FastConnect stripping tool	6ES7194-2KA00-0AA0
2 m	6ES7194-2MH20-1AC0	Stripping tool for stripping the ET connection bus cable	
5 m	6ES7194-2MH50-1AC0		
10 m	6ES7194-2MN10-1AC0		
15 m	6ES7194-2MN15-1AC0		

Technical specifications

Article number	6ES7194-2LH02-0AA0	6ES7194-2LH03-0AA0	6ES7194-2LH10-0AA0	6ES7194-2LH20-0AA0	6ES7194-2LH50-0AA0	6ES7194-2LN10-0AA0	6ES7194-2LN15-0AA0
	Bus Cable ET-Connection, 0,19m	Bus Cable ET-Connection, 0,3m	Bus Cable ET-Connection, 1,0M	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m
General information							
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables							
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH02-0AA0 Bus Cable ET-Connection, 0,19m	6ES7194-2LH03-0AA0 Bus Cable ET-Connection, 0,3m	6ES7194-2LH10-0AA0 Bus Cable ET-Connection, 1,0M	6ES7194-2LH20-0AA0 Bus Cable ET-Connection, 2,0M	6ES7194-2LH50-0AA0 Bus Cable ET-Connection, 5,0M	6ES7194-2LN10-0AA0 Bus Cable ET-Connection, 10m	6ES7194-2LN15-0AA0 Bus Cable ET-Connection, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PE	PE	PE	PE	PE	PE	PE
Material property							
• Halogen-free	No	No	No	No	No	No	No
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH02-0AA0 Bus Cable ET-Connection, 0,19m	6ES7194-2MH03-0AA0 Bus Cable ET-Connection, 0,3m	6ES7194-2MH10-0AA0 Bus Cable ET-Connection, 1,0M	6ES7194-2MH20-0AA0 Bus Cable ET-Connection, 2,0M	6ES7194-2MH50-0AA0 Bus Cable ET-Connection, 5,0M	6ES7194-2MN10-0AA0 Bus Cable ET-Connection, 10m	6ES7194-2MN15-0AA0 Bus Cable ET-Connection, 15m
General information							
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded
Suitability for use	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2MH02-0AA0	6ES7194-2MH03-0AA0	6ES7194-2MH10-0AA0	6ES7194-2MH20-0AA0	6ES7194-2MH50-0AA0	6ES7194-2MN10-0AA0	6ES7194-2MN15-0AA0
	Bus Cable ET-Connection, 0,19m	Bus Cable ET-Connection, 0,3m	Bus Cable ET-Connection, 1,0M	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m
Cables							
Cable designation	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PUR	PUR	PUR	PUR	PUR	PUR	PUR
Material of core insulation	PE	PE	PE	PE	PE	PE	PE
Material property							
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH03-0AB0	6ES7194-2LH10-0AB0	6ES7194-2LH20-0AB0	6ES7194-2LH50-0AB0	6ES7194-2LN10-0AB0	6ES7194-2LN15-0AB0
	Bus Cable ET-Con., angled, 0,3m	Bus Cable ET-Con., angled, 1,0M	Bus Cable ET-Con., angled, 2,0M	Bus Cable ET-Con., angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m
General information						
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH03-0AB0	6ES7194-2LH10-0AB0	6ES7194-2LH20-0AB0	6ES7194-2LH50-0AB0	6ES7194-2LN10-0AB0	6ES7194-2LN15-0AB0
	Bus Cable ET-Con., angled, 0,3m	Bus Cable ET-Con., angled, 1,0M	Bus Cable ET-Con., angled, 2,0M	Bus Cable ET-Con., angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m
Color of cable sheath	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PE	PE	PE	PE	PE	PE
Material property						
• Halogen-free	No	No	No	No	No	No
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH03-0AB0	6ES7194-2MH10-0AB0	6ES7194-2MH20-0AB0	6ES7194-2MH50-0AB0	6ES7194-2MN10-0AB0	6ES7194-2MN15-0AB0
	Bus cable ET-Con., angled, 0,3m	Bus cable ET-Con., angled, 1,0M	Bus cable ET-Con., angled, 2,0M	Bus cable ET-Con., angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m
General information						
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2MH03-0AB0	6ES7194-2MH10-0AB0	6ES7194-2MH20-0AB0	6ES7194-2MH50-0AB0	6ES7194-2MN10-0AB0	6ES7194-2MN15-0AB0
	Bus cable ET-Con., angled, 0,3m	Bus cable ET-Con., angled, 1,0M	Bus cable ET-Con., angled, 2,0M	Bus cable ET-Con., angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s²	
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PUR	PUR	PUR	PUR	PUR	PUR
Material of core insulation	PE	PE	PE	PE	PE	PE
Material property						
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes

Article number	6ES7194-2LH20-0AC0	6ES7194-2LH50-0AC0	6ES7194-2LN10-0AC0	6ES7194-2LN15-0AC0
	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m
General information				
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions				
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C
Cables				
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH20-0AC0 Bus Cable ET-Connection, 2,0M	6ES7194-2LH50-0AC0 Bus Cable ET-Connection, 5,0M	6ES7194-2LN10-0AC0 Bus Cable ET-Connection, 10m	6ES7194-2LN15-0AC0 Bus Cable ET-Connection, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC
Material of core insulation	PE	PE	PE	PE
Material property				
• Halogen-free	No	No	No	No
• Silicone-free	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH20-0AC0 Bus Cable ET-Connection, 2,0M	6ES7194-2MH50-0AC0 Bus Cable ET-Connection, 5,0M	6ES7194-2MN10-0AC0 Bus Cable ET-Connection, 10m	6ES7194-2MN15-0AC0 Bus Cable ET-Connection, 15m
General information				
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions				
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C
Cables				
Cable designation	2Y(ST)C11Y 2x2x0.5/ 1.0-100-GN	2Y(ST)C11Y 2x2x0.5/ 1.0-100-GN	2Y(ST)C11Y 2x2x0.5/ 1.0-100-GN	2Y(ST)C11Y 2x2x0.5/ 1.0-100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2MH20-0AC0	6ES7194-2MH50-0AC0	6ES7194-2MN10-0AC0	6ES7194-2MN15-0AC0
	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PUR	PUR	PUR	PUR
Material of core insulation	PE	PE	PE	PE
Material property				
• Halogen-free	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes

Article number	6ES7194-2LH02-1AA0	6ES7194-2LH03-1AA0	6ES7194-2LH10-1AA0	6ES7194-2LH20-1AA0	6ES7194-2LH50-1AA0	6ES7194-2LN10-1AA0	6ES7194-2LN15-1AA0
	Power Cable M8, 0,19m	Power Cable M8, 0,3m	Power Cable M8, 1,0M	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
General information							
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables							
Cable designation	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH02-1AA0	6ES7194-2LH03-1AA0	6ES7194-2LH10-1AA0	6ES7194-2LH20-1AA0	6ES7194-2LH50-1AA0	6ES7194-2LN10-1AA0	6ES7194-2LN15-1AA0
	Power Cable M8, 0,19m	Power Cable M8, 0,3m	Power Cable M8, 1,0M	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
Number of bending cycles	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Bending radius for continuous bending	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PP	PP	PP	PP	PP	PP	PP
Material property							
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH02-1AA0	6ES7194-2MH03-1AA0	6ES7194-2MH10-1AA0	6ES7194-2MH20-1AA0	6ES7194-2MH50-1AA0	6ES7194-2MN10-1AA0	6ES7194-2MN15-1AA0
	Power Cable M8 0,19m	Power Cable M8, 0,3m	Power Cable M8, 1,0M	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
General information							
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables							
Cable designation	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2MH02-1AA0	6ES7194-2MH03-1AA0	6ES7194-2MH10-1AA0	6ES7194-2MH20-1AA0	6ES7194-2MH50-1AA0	6ES7194-2MN10-1AA0	6ES7194-2MN15-1AA0
	Power Cable M8 0,19m	Power Cable M8, 0,3m	Power Cable M8, 1,0M	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
Number of bending cycles	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Bending radius for continuous bending	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR
Material of core insulation	PP	PP	PP	PP	PP	PP	PP
Material property							
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Article number	6ES7194-2LH03-1AB0	6ES7194-2LH10-1AB0	6ES7194-2LH20-1AB0	6ES7194-2LH50-1AB0	6ES7194-2LN10-1AB0	6ES7194-2LN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
General information						
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH03-1AB0	6ES7194-2LH10-1AB0	6ES7194-2LH20-1AB0	6ES7194-2LH50-1AB0	6ES7194-2LN10-1AB0	6ES7194-2LN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
Number of bending cycles	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Bending radius for continuous bending	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PP	PP	PP	PP	PP	PP
Material property						
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH03-1AB0	6ES7194-2MH10-1AB0	6ES7194-2MH20-1AB0	6ES7194-2MH50-1AB0	6ES7194-2MN10-1AB0	6ES7194-2MN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
General information						
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2MH03-1AB0	6ES7194-2MH10-1AB0	6ES7194-2MH20-1AB0	6ES7194-2MH50-1AB0	6ES7194-2MN10-1AB0	6ES7194-2MN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
Number of bending cycles	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Bending radius for continuous bending	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR
Material of core insulation	PP	PP	PP	PP	PP	PP
Material property						
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes

Article number	6ES7194-2LH20-1AC0	6ES7194-2LH50-1AC0	6ES7194-2LN10-1AC0	6ES7194-2LN15-1AC0
	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
General information				
Product type designation	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions				
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C
Cables				
Cable designation	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y	4 Li9Y 0.50 mm² Y
Cable length	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4
Outer diameter of inner conductor	0.8 mm	0.8 mm	0.8 mm	0.8 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.2 mm	5.2 mm	5.2 mm	5.2 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH20-1AC0 Power Cable M8, 2,0M	6ES7194-2LH50-1AC0 Power Cable M8, 5,0M	6ES7194-2LN10-1AC0 Power Cable M8, 10m	6ES7194-2LN15-1AC0 Power Cable M8, 15m
Number of bending cycles	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	52 mm	52 mm	52 mm	52 mm
Bending radius for continuous bending	52 mm	52 mm	52 mm	52 mm
Color of cable sheath	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC
Material of core insulation	PP	PP	PP	PP
Material property				
• Silicone-free	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH20-1AC0 Power Cable M8, 2,0M	6ES7194-2MH50-1AC0 Power Cable M8, 5,0M	6ES7194-2MN10-1AC0 Power Cable M8, 10m	6ES7194-2MN15-1AC0 Power Cable M8, 15m
General information				
Product type designation	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions				
Ambient temperature during assembly, min.	-25 °C	-25 °C	-25 °C	-25 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation				
• min.	-25 °C	-25 °C	-25 °C	-25 °C
• max.	80 °C	80 °C	80 °C	80 °C
Cables				
Cable designation	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²
Cable length	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4
Outer diameter of inner conductor	1 mm	1 mm	1 mm	1 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.1 mm	5.1 mm	5.1 mm	5.1 mm
Number of bending cycles	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	51 mm	51 mm	51 mm	51 mm
Bending radius for continuous bending	51 mm	51 mm	51 mm	51 mm

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2MH20-1AC0 Power Cable M8, 2,0M	6ES7194-2MH50-1AC0 Power Cable M8, 5,0M	6ES7194-2MN10-1AC0 Power Cable M8, 10m	6ES7194-2MN15-1AC0 Power Cable M8, 15m
Color of cable sheath	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PE-PUR	PE-PUR	PE-PUR	PE-PUR
Material of core insulation	PP	PP	PP	PP
Material property				
• Halogen-free	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes

Article number	6ES7194-2LH02-0AD0 Connecting Cable ET-Connection, 0,2m	6ES7194-2MH02-0AD0 Connecting cable ET-Connection 0,2m
General information		
Product type designation	Connecting cable for bus cable	Connecting cable for bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 sockets, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 sockets, 4-pin, shielded
Suitability for use	For connecting two ET CONNECTION bus cables	For connecting two ET CONNECTION bus cables
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during assembly, min.	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	80 °C	80 °C
Cables		
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)C11Y 2x2x0.5/1.0-100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.2 m	0.2 m
Number of electrical cores	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm
Permissible bending radius, single bend, min.	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm
Color of cable sheath	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km
Mechanics/material		
Outgoing feeder type	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PUR
Material of core insulation	PE	PE
Material property		
• Halogen-free	No	Yes
• Silicone-free	Yes	Yes

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2AA00-0AA0 M8 Power Connector	6ES7194-2AC00-0AA0 M8 Power Connector, Socket
General information		
Product type designation	Power connector	Power connector
Product description	M8 plug connector with high degree of protection, 4-pin, plastic version	M8 plug connector with high degree of protection, socket insert, 4-pin, plastic version
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during assembly, min.	-30 °C	-30 °C
Ambient temperature during assembly, max.	85 °C	85 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	85 °C	85 °C
connection method		
Connector type	M8, 4-pole	M8, 4-pole
Type of electrical connection for mains supply line	Screw terminals	Screw terminals
• connectable cable cross-section for mains supply line, min.	0.14 mm ²	0.14 mm ²
• connectable cable cross-section for mains supply line, max.	0.5 mm ²	0.5 mm ²
• Connectable conductor cross-section for AWG cables, min.	26	26
• Connectable conductor cross-section for AWG cables, max.	20	20
Suitable for cable diameter, min.	4 mm	4 mm
usable for cable diameter, max.	5.5 mm	5.5 mm
Mechanics/material		
Outgoing feeder type	180° cable outlet	180° cable outlet
Material of housing	plastic	plastic
Dimensions		
Width	14 mm	14 mm
Depth	47 mm	47 mm

Article number	6ES7194-2AB00-0AA0 M8 Connector ET-Connection	Article number	6ES7194-2AB00-0AA0 M8 Connector ET-Connection
General information		Ambient conditions	
Product type designation	Connection plug	Ambient temperature during assembly, min.	-30 °C
Product description	M8 plug connector with high degree of protection, 4-pin, metal version	Ambient temperature during assembly, max.	80 °C
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	Ambient temperature during storage/transportation	
Degree and class of protection		• min.	-40 °C
IP degree of protection	IP65/67	• max.	80 °C
		Mechanics/material	
		Outgoing feeder type	180° cable outlet
		Material of housing	metal
		Dimensions	
		Width	14 mm
		Depth	47 mm

I/O systems
SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Labels

Overview

- Labels for the identification of channels, modules and slots of ET 200AL components
- Can be used for interface modules and I/O modules

Ordering data

Labels
10 x 5 mm, RAL 9016;
5 frames with 40 labels each

Article No.

6ES7194-2BA00-0AA0